

# CAM-LITE 200

B06033

## DESCRIPTION

Budget friendly Lightpanel for livestreaming and small studio lighting

## FEATURES

- Budget friendly Lightpanel for livestreaming and small studio lighting.
- Compact but powerful output: 2400 CW / WW 0,2W LEDs with 210W total power.
- Tunable white 3000K → 6300K
- 4 leaf barndoor included.
- Beam angle 110°
- Flicker free dimming with refresh rates between 800Hz and 25kHz.
- Four dimmer curves: linear, square, inverse square, S-curve.
- Easy stand-alone use: 2 rotary knobs for dimming and color temperature adjustment.
- Full DMX control with 2 modes.
- Wireless DMX (optional WTR dongle) or cabled XLR 3pin in/outputs.
- Cooling by natural convection (no noisy fans).
- Rubber feet on the back for use as up-light projector.
- Color LCD display.
- PowerCON compatible in/outputs for easy daisy chaining.






## TECHNICAL SPECIFICATIONS

<b>General : Application</b>	Stage & Rental, Theatre
<b>General : Series</b>	No
<b>General : Dimensions (cm)</b>	55 x 27 x 12.5
<b>General : Weight (kg)</b>	9
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	210
<b>General : Color</b>	black
<b>General : Display</b>	LCD
<b>General : Fixation</b>	M10
<b>General : IP rating</b>	indoor
<b>Control : Modes</b>	standalone, manual, DMX Master/Slave
<b>Control : manual</b>	Yes
<b>Control : Master/Slave</b>	Yes
<b>Control : SMART-DMX</b>	No
<b>Control : Standalone</b>	fixed
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	Yes
<b>Control : maximum DMX channels</b>	4
<b>Light : lamp socket</b>	none
<b>Light : Lux</b>	677
<b>Light : lamp</b>	LED
<b>Light : min. color temperature (K)</b>	3000
<b>Light : max. color temperature (K)</b>	6300
<b>Light : CRI</b>	92
<b>Light : colors</b>	White, Cold white, Warm white
<b>Light : mix colors</b>	No
<b>Light : min. beam angle (°)</b>	110
<b>Light : max. beam angle (°)</b>	110
<b>Light : min. refresh rate (kHz)</b>	0.8
<b>Light : max. refresh rate (kHz)</b>	25
<b>Connections : input</b>	3 pin XLR, PowerCon®, wireless DMX
<b>Connections : output</b>	3 pin XLR, PowerCon®, wireless DMX
<b>Brand</b>	JB SYSTEMS
<b>EANCode</b>	5420025660334



## YOUR DEALER

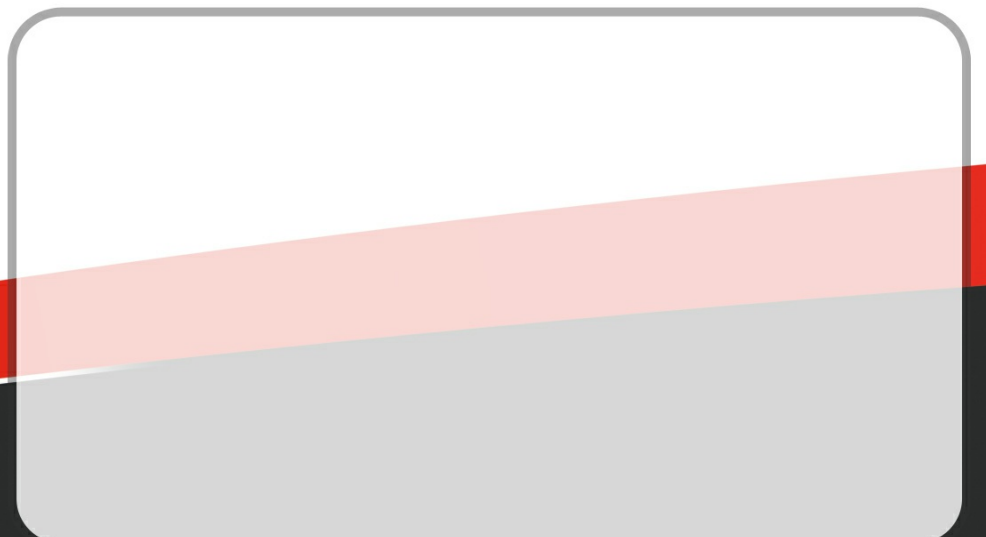

[www.jb-systems.eu](http://www.jb-systems.eu) | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2021 by BEGLEC NV. All rights reserved.

