

# HF-TWIN RECEIVER

B08307

## DESCRIPTION

Dual wireless microphone receiver to combine with HF-MIC and/or HF-BPACK

## FEATURES

- Dual PLL/UHF wireless microphone receiver used in combination with:
  - HF-MIC: wireless hand microphone (order code : B08308)
  - HF-BPACK: belt-pack and lavalier microphone (order code : B08309)
- Can be combined with the microphone combinations you need:
  - 2 x HF-MIC
  - 2 x HF-BPACK
  - 1 x HF-MIC + 1 x HF-BPACK
- The plastic case can hold one of the above combinations.
- LCD display for easy setup
- Easy channel setup via IR transmission.
- Belt-pack and hand microphone can both be used with rechargeable batteries!
- 16 selectable frequencies via PLL synthesizer:
  - Receiver 1 (left): channel 1 to 8
  - Receiver 2 (right): channel 9 to 16
- 2 separate balanced XLR outputs
- 1 x 6.3mm jack output with mixed signal from both channels
- **Frequency range: 823-832MHz (free use in most European countries)**






## TECHNICAL SPECIFICATIONS

<b>General : Series</b>	HF
<b>General : Dimensions (cm)</b>	20.5 x 18 x 4.5
<b>General : Weight (kg)</b>	1.47
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	10
<b>General : Color</b>	black
<b>Audio : microphone direction</b>	No
<b>Connections : input</b>	IEC
<b>Connections : output</b>	3 pin XLR, jack
<b>Brand</b>	JB SYSTEMS
<b>EANCode</b>	5420025683074



## YOUR DEALER

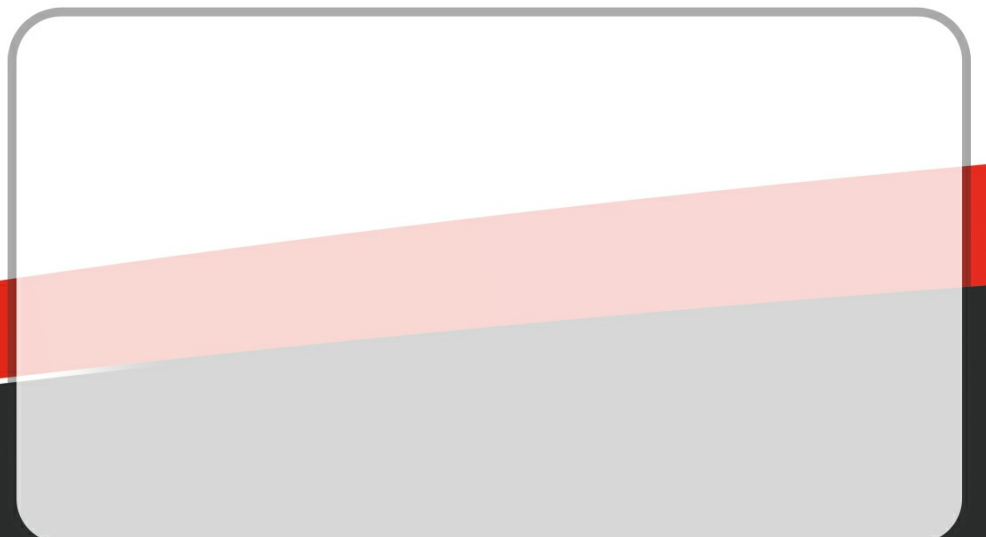

[www.jb-systems.eu](http://www.jb-systems.eu) | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2022 by BEGLEC NV. All rights reserved.

