


NEXT
proaudio
||| www.next-proaudio.com

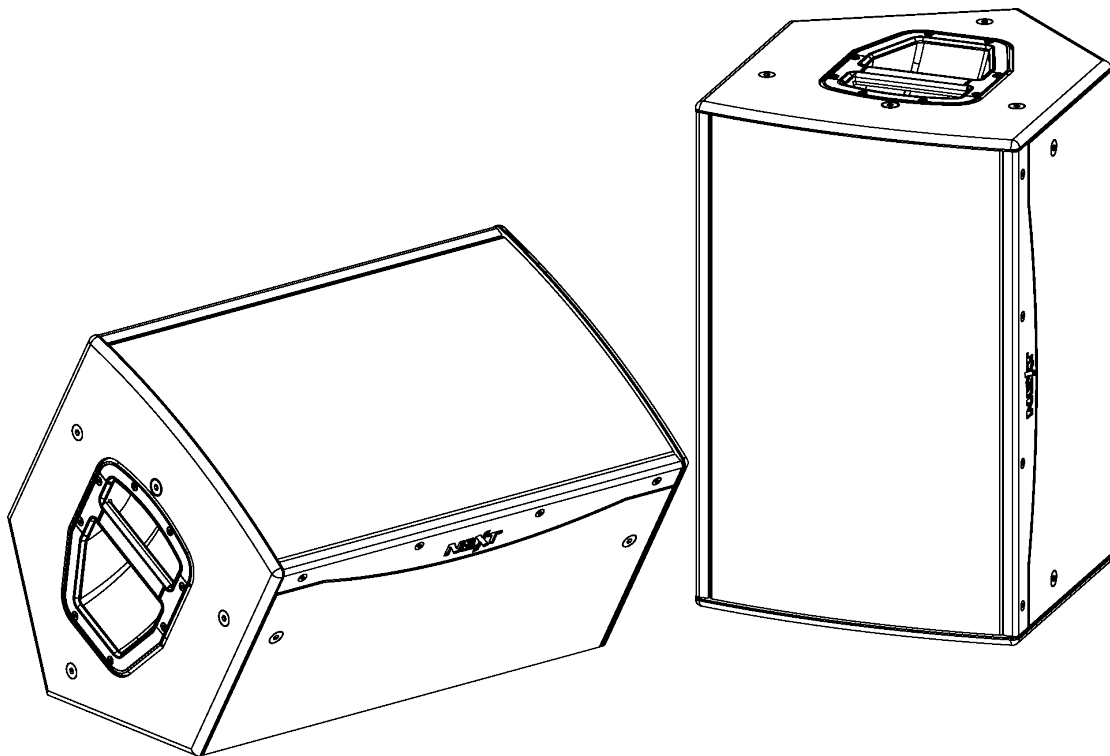

PFA15/PFA15p
ACTIVE/Passive Full-Range Speaker
USER MANUAL

V201610

CONTENTS

INTRODUCTION	- 1 -
UNPACKING	- 1 -
PFA SERIES OVERVIEW	- 1 -
SAFETY FIRST	- 2 -
PFA15 POWER AMPLIFIER AND DSP	- 4 -
PFA15p	- 5 -
TECHNICAL SPECIFICATIONS	- 6 -
WARRANTY	- 7 -
CONTACTS	- 8 -

INTRODUCTION

Thank you for purchasing a NEXT-proaudio PFA15(p) **ACTIVE**/Passive Full-Range Speaker. This manual will provide you with useful and important information about your PFA15(p) element. Please devote some time reading this manual, and keep it at hand for future reference. NEXT-proaudio is concerned with your safety and well-being, so please follow all instructions and heed all warnings. Also, a better understanding of some specific features of the PFA15(p) will help you to operate it to its full potential. With a continuous evolution of techniques and standards, NEXT-proaudio, reserves the right to change the specifications of its products without early warning. For the most current data, please visit our website: www.next-proaudio.com

UNPACKING

NEXT PFA Series are built in Europe (Portugal) by NEXT-proaudio, according to the highest standards and thoroughly inspected before they leave the factory. When unpacking your PFA15, examine it carefully for any signs of possible transit damage and inform your dealer immediately if any such damage has occurred.

It is suggested that you retain the original packaging so that the PFA15 can be repacked in the future if necessary. Please note that NEXT-proaudio and its authorized distributors cannot accept any responsibility for damage to any returned product through the use of non-approved packaging.

PFA SERIES OVERVIEW


NEXT-proaudio engineered the new PFA series of self-powered or passive speaker cabinets, specifically for installations, musicians and DJs who want state-of-the-art acoustics and electronics at a limited budget. This speaker line employs premium-quality multi-plywood with a hardening, durable, and scratch-resistant coating, fully rotatable constant directivity HF horns to adjust H x V angle coverage and custom made speaker drivers. Manufacturing takes place in Europe at our plant based in Rio Tinto, Portugal.

This series are made up of speakers and subwoofers that bind together forming the perfect combination. Several combinations of speakers and subwoofers can be done in order to satisfy your needs. The active speakers feature a variety of factory presets that allow you to use it like a plug n' play perfect solution for the venue.


SAFETY FIRST

Please pay close attention to this chapter. Failure to comply with these instructions may result on injury or death.

DANGER – HEARING DAMAGE

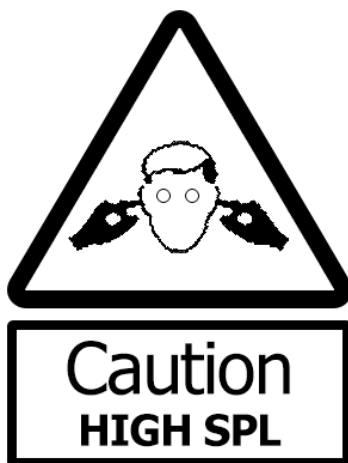

NEXT PFA Series systems are capable of producing extremely high sound pressure levels and should be used with care. Hearing loss is cumulative and can result from levels above 90dB if people are exposed for a long period. Never stand close to loudspeakers driven at high levels.



CAUTION

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**



**TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER
NO USER SERVICEABLE PARTS INSIDE
REFER SERVICE TO QUALIFIED PERSONNEL**


- Do not use your PFA15 near any sources of water, like swimming pools, lakes, water streams, exposed to rain, high humidity environments or any other source of water or moisture.
- Use only a soft dry cloth to clean your PFA15.
- Never place your PFA15 in a way that prevents air flow near the amplifier. A minimum clearance distance of 6cm should be kept between the amplifier and any near surface.
- Never use your PFA15 too close to any heat source, such as radiators, or any other device that produces heat.
- When mounted on a pole, always ensure that the floor or structure where the stack will take place is even and can withstand the weight.
- Place cables in a way that they do not present a trip hazard.
- Do not place any objects on top of the stack, they can fall accidentally and cause injuries.
- Do not attempt to move the enclosures while connected.
- Do not attempt to service the PFA15 beyond what is described in this manual. All other service or repair of this product should be carried only by qualified personnel.
- To prevent electric shock, do not use any extension cord, receptacle or other outlets where the blades of the connectors cannot be fully inserted.
- Precautions should be taken to prevent grounding failure or polarity switch.
- It is advised to unplug the PFA15 during storms or when not in use for a long period of time.

RIGGING AND SUSPENSION SAFETY CONSIDERATIONS

PFA Series enclosures are designed for portable applications, but can be suspended by means of the threaded inserts provided. These enclosures are fitted internally with steel corner reinforcement brackets to ensure that each cabinet is strong enough to be hung from its top.

- Before rigging or suspending NEXT PFA Series systems, inspect all components and all hardware for any signs of damage or missing parts. If you find any damaged, corroded or deformed parts, **do not use them**, replace them immediately.

- Do not use hardware that isn't load rated or that its rating is not enough to handle the system's weight with a good safety factor (minimum 4:1).
- Suspended systems installation should only be carried out by qualified personnel.
- Always use adequate protective clothing and equipment to prevent possible injuries.
- Be sure you understand all local and national regulations regarding equipment installation.

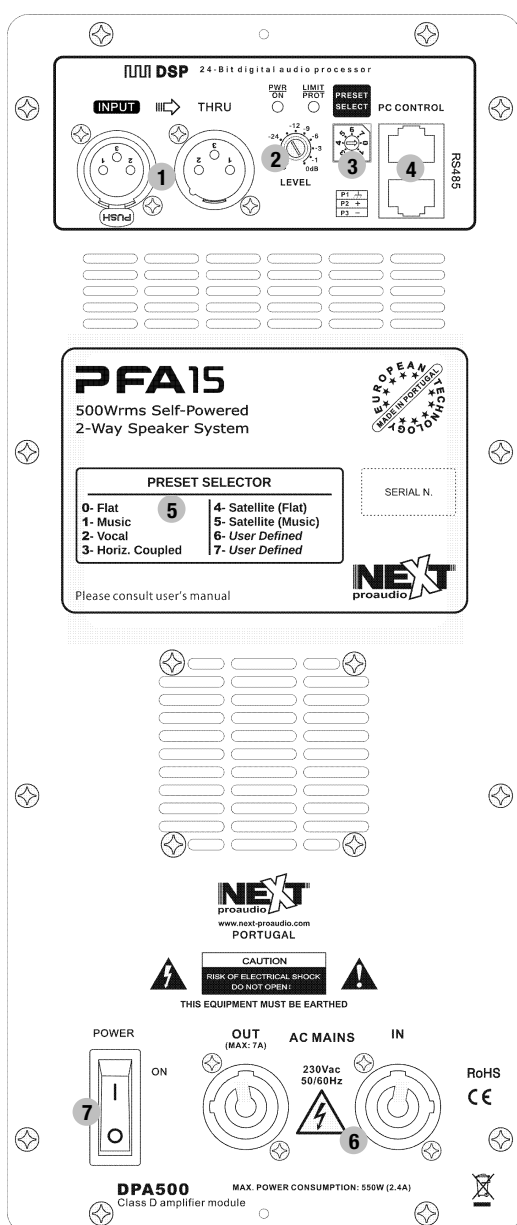


PFA15 POWER AMPLIFIER AND DSP

The PFA15, as all PFA series models, was designed to achieve a simple to use and deploy versatile system. The PFA15 is prepared to be completely plug n' play, having already six pre-determined configurations that cover almost all situations. But if you're not happy with any of those, there are also two available user defined configurations, which can be used to adapt the system to your needs using the NEXT-proaudio SOUNDWARE¹ software and the supplied RS485 to USB converter.

Here is a brief description of the amplifier panel:

- 1- Signal Input/Output
- 2- Level Adjustment Potentiometer
- 3- Preset Selector
- 4- RS485 Communication Interface
- 5- List of Available Presets
- 6- AC Mains Power Input/Output
- 7- Power On/Off Switch



Never operate the PFA series Speakers in a way that maintains the Limiter Led consistently on.


¹ Download NEXT-proaudio SOUNDWARE at www.next-proaudio.com/downloads

PFA15 Preset List:

- 0- Flat: Flat frequency response
- 1- Music: Frequency response adapted for music reproduction (SPL level boosted at low frequencies and ear compensation, due to high SPL levels, at the mid-high frequency range)
- 2- Vocal: Frequency response adapted for voice speech (High Pass Filter at 90Hz and EQing for an improved intelligibility)
- 3- Horiz. Coupled: Frequency response adapted for the sound reproduction with two units, one very next to the other (Low Shelf Filter to compensate the bass coupling)
- 4- Satellite (Flat): Flat frequency response when playing with a subwoofer (High Pass Filter at 100Hz 24dB/Oct Linkwitz-Riley)
- 5- Satellite (Music): Frequency response adapted for music reproduction when playing with a subwoofer (High Pass Filter at 100Hz 24dB/Oct Linkwitz-Riley and ear compensation, due to high SPL levels, at the mid-high frequency range)
- 6 / 7- User Defined: Free memory for user storage (Customized preset can be saved on this memory position)

PFA15p

The PFA15p is the passive version (8Ω) of the PFA15. Able to deliver an extremely high output and dynamics for its size, extreme linearity and fidelity, is one of the best solutions in terms of price/quality ratio in the market. PFA15p is provided with a passive crossover precisely calculated and optimized for the best frequency and phase response. It is recommended to use a 24dB/Oct Linkwitz-Riley high pass filter at 60Hz. When used with the PFA18s subwoofer it becomes the perfect solution for any kind of audio reinforcement and reproduction.

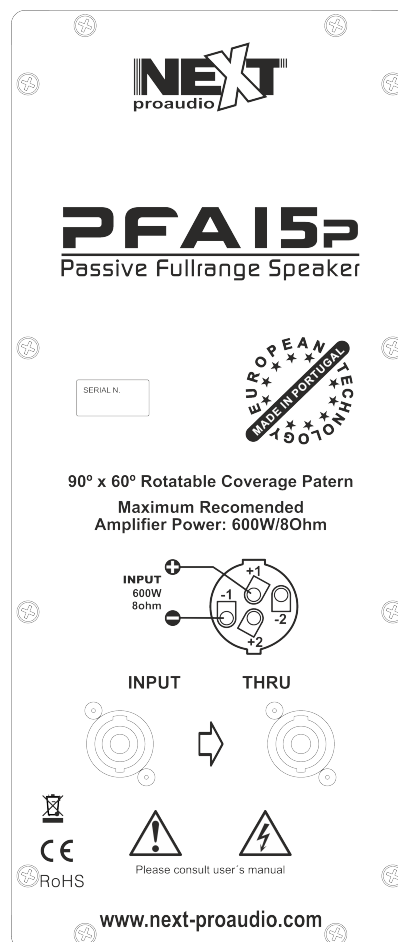


TECHNICAL SPECIFICATIONS

NEXT PFA15p TECHNICAL SPECIFICATIONS	
Speaker Type	Passive 2-Way Speaker/Monitor
Frequency Response (-6dB)	54Hz – 18.000Hz
Calculated Max. SPL (Cont/Peak)	126dB / 132dB (Full-Space)
Components	LF: 1 x 15" / 3" Voice Coil Custom Speaker
	HF: 1 x 1" / 1.75" Voice Coil Custom Compression Driver
Directivity (H x V)	90° x 60° (User Rotatable)
Program Power	600W
Nominal Impedance	8Ω
Sensitivity (1W@1m)	98dB (Full-Space)
Construction	15mm Multi-laminate Birch Plywood, Screwed and Glued
Finish	Black Textured Scratch Resistant Paint
Grille	Steel, Black Finish (also available in other colours)
Dimensions W x H x D	431 x 654 x 440 mm
Net Weight	24.5 kg
Shipping Weight	27.1 kg

NEXT PFA15 TECHNICAL SPECIFICATIONS	
Speaker Type	ACTIVE 2-Way Speaker/Monitor
Frequency Response (-6dB)	54Hz – 18.000Hz
Calculated Max. SPL (Cont/Peak)	126dB / 132dB (Full-Space)
Components	LF: 1 x 15" / 3" Voice Coil Custom Speaker
	HF: 1 x 1" / 1.75" Voice Coil Custom Compression Driver
Directivity (H x V)	90° x 60° (User Rotatable)
Amplifier Technology	2 Channel Switched Mode Class D with DSP (500W)
LF Power (RMS)	400W
HF Power (RMS)	100W
Construction	15mm Multi-laminate Birch Plywood, Screwed and Glued
Finish	Black Textured Scratch Resistant Paint
Grille	Steel, Black Finish (also available in other colours)
Dimensions (W x H x D)	431 x 654 x 440 mm
Net Weight	25.7 kg
Shipping Weight	28.5 kg

DIMENSIONS

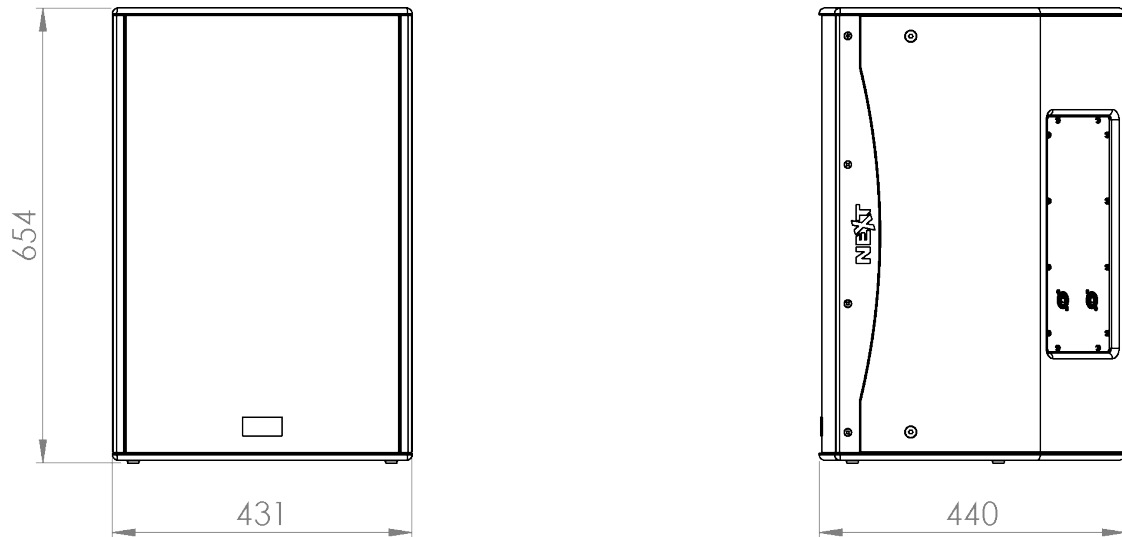

WARRANTY

NEXT-proaudio's products are warranted, by NEXT-proaudio, against **manufacturing defects** in materials or craftsmanship over a period of 5 years for the passive loudspeakers, and 2 years for all other products counting from the date of original purchase. The original receipt of purchase is mandatory for warranty validation purposes, and the product must have been bought from a NEXT-proaudio authorized dealer.

The warranty can be transferred to a subsequent owner during the warranty period; however, this cannot extend the warranty period beyond the original warranty period of five years from the original date of purchase stated on the NEXT-proaudio's invoice.

During the warranty period NEXT-proaudio will, at its own discretion, either repair or replace a product which prove to be defective provided that the product is returned in its original packaging, shipping prepaid, to an authorized NEXT-proaudio service agent or distributor.

NEXT-proaudio cannot be held responsible for defects caused by unauthorized modifications, improper use, negligence, exposure to inclement weather conditions, act of God or accident, or any use of this product that is not in accordance with the instructions provided by this manual and/or NEXT-proaudio. NEXT-proaudio is not liable for consequential damages.

This warranty is exclusive and no other warranty is expressed or implied. This warranty does not affect your statutory rights.

CONTACTS

In case of any doubts or any information just:

Write us:

NEXT-PROAUDIO
Rua da Venda Nova, 295
4435-469 Rio Tinto
Portugal

Contact us:

Tel. +351 22 489 00 75
Fax. +351 22 480 50 97

Send an e-mail:

info@next-proaudio.com

Search our website:

www.next-proaudio.com

Follow us on:

Facebook: facebook.com/nextproaudio

Instagram: instagram.com/nextproaudio

LinkedIn: linkedin.com/company/next-proaudio

Twitter: twitter.com/next_proaudio

Youtube: youtube.com/user/NEXTmanufacturer