BT-AKKUPOLE
B05162

Description

Stylish battery-powered 4x 5Watt LED-lighting pole with wireless DMX, perfect to light up buffets, presentation counters, etc.

Features

- Stylishly designed battery-powered lighting pole with great autonomy.
- The perfect tool for illuminating buffets, presentation counters, etc.
- Equipped with 4 pivoting 5 watt 25° LED projectors (3000K & CRI>90)
- The sturdy swivel arm with projectors can be set in 6 fixed positions.
- Lightning fast assembly/disassembly without any tools.
- Sturdy construction quality with adjustable height for frequent and versatile use in rental jobs.
- Different heights possible: just install 1, 2 or no 1m extension tube
- Also 50cm extension poles are available as an option.
- The supplied heavy base (45x37cm) ensures very high stability, even at maximum height.
- Equipped with magnetic filter holders for the use of all kinds of filters:
  - CTO/CTB filters: adjust CCT to e.g. 4000K, 2700K, …
  - Color filters: choose any color imaginable
  - Frost filters: adjust beam angle
- Clear and very easy user interface.
- 3 touch buttons and clear LCD screen with information about remaining battery time.
- Multiple operating modes:
  - Built-in wireless DMX receiver (with XLR output: can serve as W-DMX receiver)
  - Wired DMX control via XLR in/out (1 dimming channel)
  - Simple manual operation on the base.
- High capacity lithium batteries (288Wh) for extended autonomy (>14.5 hours at 100% output).
- Internal processor-controlled battery charger with IP65 PowerKon in/output.
- Works perfectly on mains power as well (batteries are recharged during use)
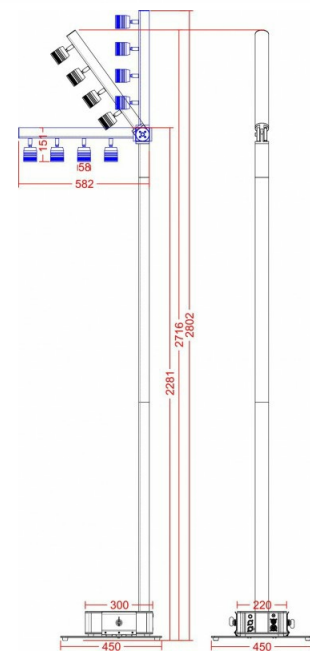- Professional flight case (120x60cm) optionally available for transport of 4 complete sets.

Technical Specifications

General : Application	Architectural, Commercial, Stage & Rental
General : Dimensions (cm)	see picture
General : Weight (kg)	25
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	69
General : Color	black
General : Display	LCD
General : IP rating	indoor
Control : Modes	standalone, manual, DMX M/S
Control : manual	Yes
Control : Master/Slave	Yes
Control : SMART-DMX	No
Control : Standalone	fixed
Control : programmable	No
Control : upgradable software	No
Control : maximum DMX channels	1
Light : lamp socket	none
Light : lamp	LED
Light : min. color temperature (K)	3200
Light : max. color temperature (K)	3200
Light : CRI	90
Light : mix colors	No
Light : min. beam angle (°)	25
Light : max. beam angle (°)	50
Light : min. refresh rate (kHz)	No
Light : max. refresh rate (kHz)	No
Connections : input	3 pin XLR, TRUE1 powerCON, wireless DMX
Connections : output	3 pin XLR, TRUE1 powerCON, wireless DMX
Brand	BRITEQ
EANCode	5420025651622

www.briteq-lighting.com | https://www.facebook.com/Briteq