

marantz®



MELODY (M-CR412) TRUE HIFI CD SYSTEM

The moment you see the new Melody, you'll know that this latest incarnation is pure refinement. The compact, elegant mini-system features a built-in CD Player and a USB input for digital music files including high resolution WAV, FLAC, ALAC and even DSD. Four high-efficiency, low-distortion digital audio amplification channels can be configured to drive two pairs of loudspeakers with independent volume control for each pair for a superior listening environment. A FM/DAB+ tuner and built-in Bluetooth provide multiple options for music listening with extraordinary Marantz audio quality.

Highlights

Your Benefits


60W x 2ch (6 ohms), or 4x 30W for speaker A/B with individual volume setting	Power and connectivity to suit your demanding audio preference
Plays CD, WMA/MP3 (CD-R/RW) and features an FM and DAB+tuner	No matter how you listen, enjoy your music with elevated Marantz audio quality
Supports MP3 and WAV/FLAC/ALAC 192kHz/24bit, DSD 2.8/5.6MHz playback	High-performance, high-resolution audio playback for every source
Built-in Bluetooth	Easily play back music from any smart device
Includes two digital Optical inputs with auto-sensing for your TV or digital device	The Melody detects the signal input from your TV and outputs elevated audio
Works with your existing TV remote	Program the Melody to work with your TV remote and easily adjust volume up, volume down, mute and source selection
Styled in a high-gloss black or silver and gold finish	Refined elegance and thoughtful design to complement superb performance



because music matters

marantz®

MELODY (M-CR412) TRUE HI-FI CD SYSTEM

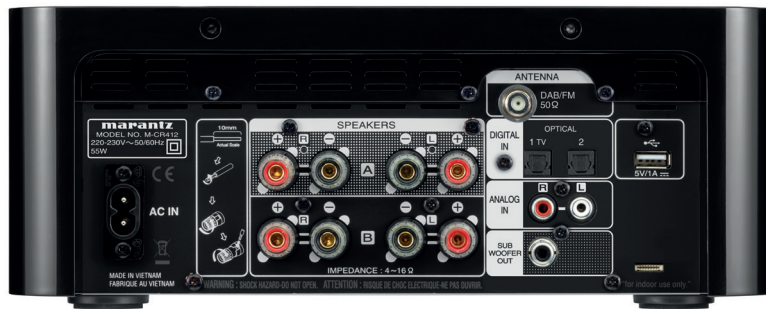

Design and specifications are subject to change by Marantz without notice.

FEATURES	MELODY (M-CR412)
High quality power output	2x 60 W or 4x 30 W
Bi-Amping / Parallel BTL mode	• / -
CD Compatibility: CD / CD-R/RW / WMA / MP3 / AAC	• / • / • / • / •
Tuner: DAB / DAB+ / FM (RDS)	• / • / •
Rear USB	•
Speaker A / B	• (Individual volume)
Powered multi-room for one extra room	•
Digital Optical in / Analogue in	2 / 1
Analogue out	-
Subwoofer Pre-out	•
Headphone Output	•
High Grade Audio Components	•
Tone Control: Bass / Treble / Balance	• / • / •
Display	FI 2-line
Illuminated front	pure white + off mode
Clock / Sleep Timer	• / •
Programmable Timer: Once / Daily	• / •
SPECIFICATIONS	
AUDIO SECTION	
Power Output (6 ohm, 1kHz)	60 W / 30 W
Number of channels	2 / 4
Freq. Response (Analogue In)	5Hz - 40kHz
Signal to Noise Ratio	90dB
Total Harmonic Distortion	0.1 %
DAB+ SECTION	
Receiving Range (Band III)	•
Signal to Noise Ratio DAB (Mono/Stereo)	95dB
Frequency response DAB	20Hz - 20 kHz
Stereo Separation DAB	90dB
TUNER SECTION FM	
Frequency Range FM	87.5 - 108 MHz
Signal to Noise Ratio (Mono/Stereo) FM	70/70dB
Total Harmonic Distortion (Mono/Stereo) FM	0.3/0.4%

GENERAL			
Available colors			Black / Silver-Gold
Power Consumption			55 W
Standby Consumption			0.3 W
Auto Power off			•
Detachable Power Cable			•
Remote Control			RC015CR
DAB Antenna included			•
Maximum Dimensions (W x D x H)			280 x 303 x 111 mm
Weight			3.4 kg
EAN			
EU	MCR412/N1B	4951035069936	Black
	MCR412/N1SG	4951035069943	Silver-Gold
UK	MCR412/T1B	4951035071106	Black
	MCR412/T1SG	4951035071113	Silver-Gold

Sound United Europe
A Division of D&M Europe B.V.
Beemdstraat 11
5653 MA Eindhoven
The Netherlands

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.