

ARTECTA



Index

02. Home Applications

- 03. Livingroom / Bathroom / Kitchen / Hallway
- 06. Bathroom
- 08. Garden
- 12. Home Office
- 14. Smart Home
- 15. Wireless solutions

19. Commercial Locations

- 20. Bar / Restaurant / Pub / Discoteques
- 23. Stores
- 28. Terraces & Parks
- 31. Gyms

34. Architectural

- 35. Façades
- 37. Offices
- 41. Expositions

42. Signage

- 43. Outdoor signage

44. LED Strips

- 45. White
- 54. RGB
- 59. RGBW + CW + NW + WW
- 61. UV
- 62. Humid & Wet Conditions
- 70. IP68 - Outdoor Permanent Use
- 72. Signage

73. Profiles





Home Applications

Stylish, practical, and cosy lighting solutions for in and around the house.

Living room, bedroom, kitchen, hallway –Track light systems and recessed lights can provide an elegant and practical solution for multiple applications. With track lights, it's easy to get the light beam and desired amount of light exactly where you want it. Optionally, an adjustable colour temperature adds to the versatility of the lighting installation.

ARTECTA



White – Pure white LED strips are available in warm and cold white. Combined with a profile with a milky-white cover, they provide a very evenly spread lighting.

Ancona 3-Phase Pinspot


A0320061 Black - RAL9004 GU10

Specifications:

Power Consumption:	100 W	IP Rating:	IP20 (indoor use only)
Weight:	0.5 kg	Colour:	Black

FEATURES:

- 3-phase track light Pin Spot
- Suitable for GU10 (AR111) light sources up to 100 watt
- Both horizontal and vertical rotatable



Trenton GU10 Track Light

A0320015 3-Phase Track Black

A0320016 3-Phase Track White

A0320017 1-Phase Track Black


A0320018 1-Phase Track White

Specifications:

Weight:	0.25 kg	IP Rating:	IP20 (indoor use only)
		Colour:	Black/White

FEATURES:

- Track Light with GU10D socket
- Fit for a light source up to 50 W (LED & halogen)
- Available in either black and white
- Light source not included



Athena 68 Round 3000K adj.

A0135287 White 220 V / 7 W, 90°, 590 lm dimm. IP20

Specifications:

Light Source Type:	LED	Power Consumption:	7 W
LED Colour Type:	W / WW / CW	Driver:	Included
Lumen Total:	590 lm	Ø:	95 mm
CRI:	80	IP Rating:	IP20 (indoor use only)
CCT:	0 K	Mounting Depth:	575 mm
Dimmable:	Yes	Mounting Size:	Ø 68-80 mm

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K-4000 K - 6000 K
- CRI >80



Home Applications

Athena 90 Round 3000 K adj.

A0135289 White 230 V / 9 W, 90°, 800 lm dimm. IP20


Specifications:

Light Source Type: LED
LED Colour Type: W / WW / CW
Lumen Total: 800 lm
CRI: 80
CCT: 0 K

Power Consumption: 9 W
Driver: Included
Ø: 113 mm
IP Rating: IP20 (indoor use only)
Mounting Depth: 58 mm
Mounting Size: Ø 90-102 mm

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K-4000 K - 6000 K
- CRI >80



For white LED strips, please refer to page 45 and onwards.

Scan this QR code to find more information on track light accessories.





Home Applications

Stylish, practical, and cosy lighting solutions for in and around the house.

Bathroom – For humid indoor conditions, you will need IP44-rated fixtures or better. An adaptable colour temperature and full-colour RGBW LED strips allow you to adjust the light to taste.

ARTECTA



IP44 – Solutions for humid environments require an additional layer of protection. An IP44 rating makes LED strips suitable for wet indoor applications.

Malia-68 3000 K - 6 W

A0135291 Dimmable LED Recessed Spotlight - black

A0135290 Dimmable LED Recessed Spotlight - white

Specifications:

Light Source Type: LED
LED Colour Type: WW
Lumen Total: 405 lm
CRI: 83
CCT: 3000 K
Dimmable: Yes

Power Consumption: 6 W
Driver: Built-in
Ø: 81 mm
IP Rating: IP44
Mounting Depth: 79 mm
Mounting Size: Ø 68-73 mm

FEATURES:

- Dimmable 6 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 68–73 mm/2.68”–2.87” and 79 mm height
- Available in black and white



Malia-90 3000 K - 9 W

A0135301 Dimmable LED Recessed Spotlight - black

A0135300 Dimmable LED Recessed Spotlight - white

Specifications:

Light Source Type: LED
LED Colour Type: WW
Lumen Total: 637 lm
CRI: 83
CCT: 3000 K
Dimmable: Yes

Power Consumption: 9 W
Driver: Built-in
Ø: 103 mm
IP Rating: IP44
Mounting Depth: 91 mm
Mounting Size: Ø 90-95 mm

FEATURES:

- Dimmable 9 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 90–95 mm/3.54”–3.74” & 91 mm height (3.58”)
- Available in black and white



Please find our LED strips for humid indoor conditions (IP rating of IP44 or higher) on page 62 and following.



Home Applications

Stylish, practical, and cosy lighting solutions for in and around the house.

Garden – For outdoor applications, an IP rating of IP65 is the minimum you can use. For spots, the beam angle is most important. The colour temperature defines a cold, natural, or warm feel.

ARTECTA



IP68 – For permanent outdoor installations we advise the use of IP68-rated LED strips. They provide the necessary protection for the demanding outdoor conditions.


Acapulco 1R 6W COB 3000 K 24° HONEYCOMB

A0525130 5 W Warm White Recessed Ground LED Spot IP67

Specifications:		Power Consumption:	6 W
Light Source Type:	LED	Protection Class:	II
LED Colour Type:	WW	Mounting Size:	Ø 85 mm
Lumen Total:	161 lm	Mounting Depth:	121 mm
CCT:	3000 K	IP Rating:	IP67
Beam Angle Circular:	24 °	Power Supply:	220V-240 VAC 50 Hz
Dimmable:	No	IK Rating:	08

FEATURES:

- 5 W recessed ground CREE COB LED light
- Warm White 3000 K colour temperature
- IP67, suitable for outdoor applications
- 24° beam angle
- 230 V direct voltage




Altha-1R 3000 K 30°

A0520060 2 W Warm White Recessed Ground LED Spot IP67

Specifications:		Power Consumption:	2.6 W
Light Source Type:	LED	Protection Class:	II
LED Colour Type:	WW	Mounting Size:	48 mm
Lumen Total:	145 lm	Mounting Depth:	117 mm
CCT:	3000 K	IP Rating:	IP67
Beam Angle Circular:	15 °	Power Supply:	220V-240 VAC 50 Hz
Dimmable:	No	IK Rating:	08

FEATURES:

- 2.6 W recessed ground LED light
- Warm White 3000 K colour temperature
- IP67, suitable for outdoor applications
- 30° beam angle
- 230 V direct voltage
- Aluminum die-cast with steel front plate
- Mounting sleeve included



Sonora 1R 6W COB 3000 K 24° HONEYCOMB

A0525140 Dimmable 5 W Warm White Recessed Ground LED Spot IP67

Specifications:		Power Consumption:	6 W
Light Source Type:	LED	Protection Class:	II
LED Colour Type:	WW	Mounting Size:	Ø 85 mm
Lumen Total:	180 lm	Mounting Depth:	121 mm
CCT:	3000 K	IP Rating:	IP67
Dimmable (Type):	Trailing edge	Power Supply:	220V-240 VAC 50 Hz
Beam Angle Circular:	24 °	IK Rating:	08
Dimmable:	Yes		

FEATURES:

- 5 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Sonora 2R 10W COB 3000K 24° HONEYCOMB


A0525240 Dimmable 10 W Warm White Recessed Ground LED Spot IP67

Specifications:

Light Source Type:	LED	Power Consumption:	7.3 W
LED Colour Type:	WW	Protection Class:	II
Lumen Total:	313 lm	Mounting Size:	Ø 119 mm
CCT:	3000 K	Mounting Depth:	135 mm
Dimmable (Type):	Trailing edge	IP Rating:	IP67
Beam Angle Circular:	24 °	Power Supply:	220V-240 VAC 50 Hz
Dimmable:	Yes	IK Rating:	08

FEATURES:

- 10 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Sonora 3R 15 W COB 3000 K 24° HONEYCOMB

A0525340 Dimmable 15 W Warm White Recessed Ground LED Spot IP67

Specifications:

Light Source Type:	LED	Power Consumption:	14.6 W
LED Colour Type:	WW	Protection Class:	II
Lumen Total:	723 lm	Mounting Size:	Ø 147 mm
CCT:	3000 K	Mounting Depth:	160 mm
Dimmable (Type):	Trailing edge	IP Rating:	IP67
Beam Angle Circular:	24 °	Power Supply:	220V-240 VAC 50 Hz
Dimmable:	Yes	IK Rating:	08

FEATURES:

- 15 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Canberra 1 7 W COB 3000 K 24°

A0720090 Garden Light

Specifications:

Light Source Type:	LED	Length (mm):	100 mm
LED Colour Type:	WW	Height (mm):	354 mm
Lumen Total:	477 lm	Width (mm):	60 mm
Beam Angle Circular:	24 °	IP Rating:	IP66
Dimmable:	No	Colour:	Grey
Power Consumption:	6.8 W	Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 7 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED



Canberra 2 12 W COB 3000 K 24°

A0720091 Garden Light




Specifications:

Light Source Type:	LED	Length (mm):	128 mm
LED Colour Type:	WW	Height (mm):	375 mm
Lumen Total:	1075 lm	Width (mm):	80 mm
Beam Angle Circular:	24 °	IP Rating:	IP66
Dimmable:	No	Colour:	Grey
Power Consumption:	12.5 W	Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 12 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED



Canberra 3 20 W COB 3000 K 24°

A0720092 Garden Light




Specifications:


Light Source Type:	LED	Length (mm):	160 mm
LED Colour Type:	WW	Height (mm):	480 mm
Lumen Total:	1846 lm	Width (mm):	100 mm
Beam Angle Circular:	24 °	IP Rating:	IP66
Dimmable:	No	Colour:	Grey
Power Consumption:	21.1 W	Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 20 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED



LED strips for permanent outdoor use (IP68) can be found on page 70/71.

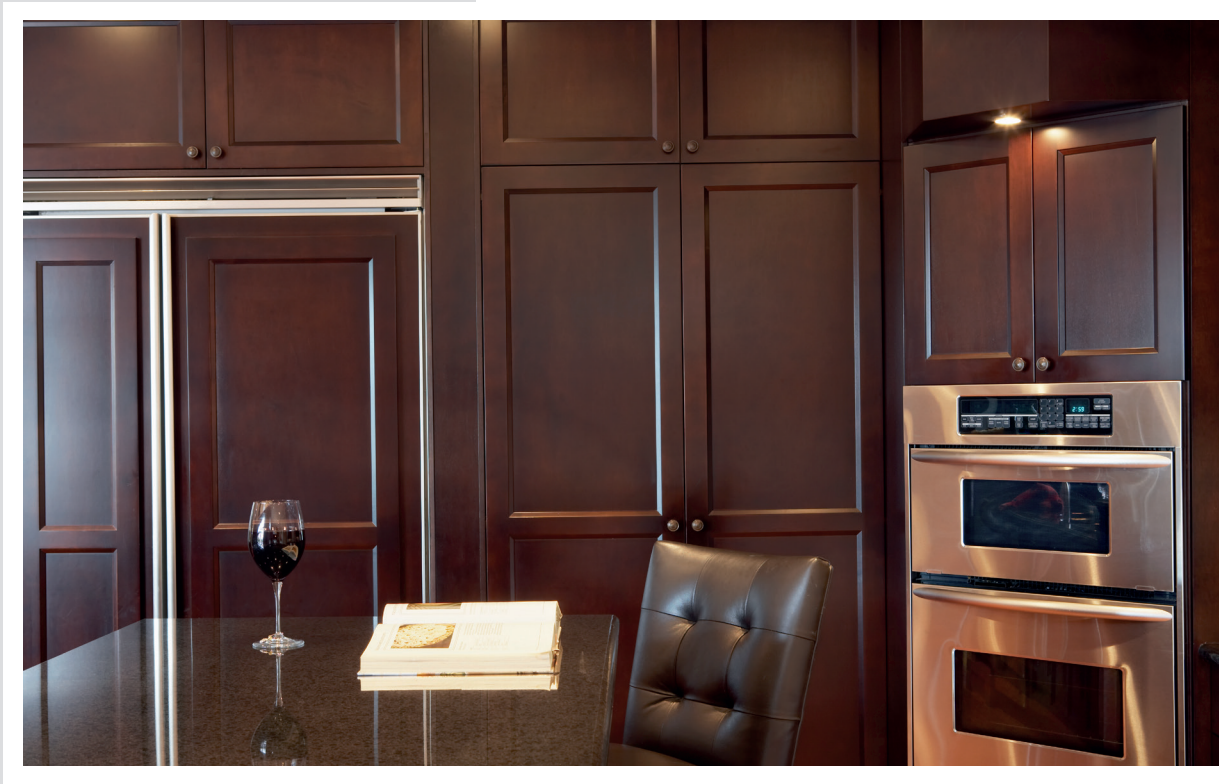


Home Applications

Stylish, practical, and cosy lighting solutions for in and around the house.

Home Office – Working from home has never gotten this big a boost. Track lights offer a stylish and flexible solution for creating a productive working environment.

ARTECTA

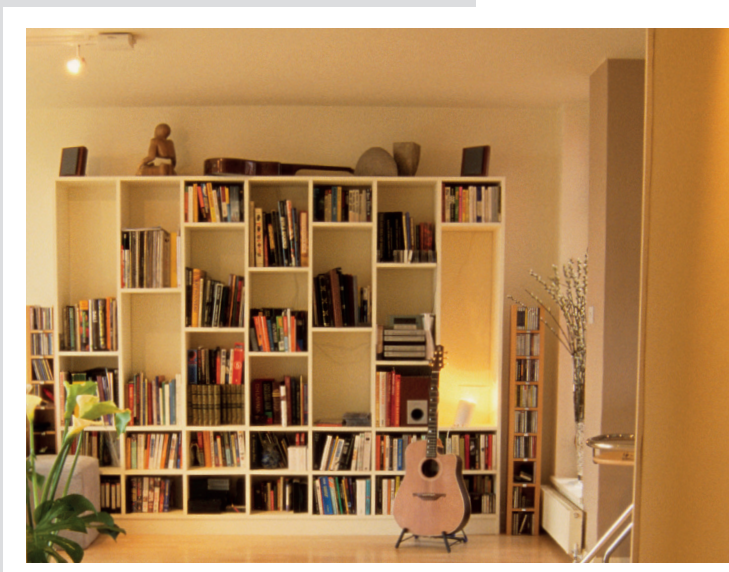

White – Pure white LED strips are available in warm and cold white. Combined with a profile with a milky-white cover, they provide a very evenly spread lighting.


Trenton GU10 Track Light

- A0320015** 3-Phase Track Black
- A0320016** 3-Phase Track White
- A0320017** 1-Phase Track Black
- A0320018** 1-Phase Track White

<p>Specifications:</p> <p>Weight: 0.25 kg</p>	<p>IP Rating: Colour:</p>	<p>IP20 (indoor use only) Black/White</p>
---	-------------------------------	---

FEATURES:

- Track Light with GU10D socket
- Fit for a light source up to 50 W (LED & halogen)
- Available in either black and white
- Light source not included




Ancona 3-Phase Pinspot

- A0320061** Black - RAL9004 GU10

<p>Specifications:</p> <p>Power Consumption: 100 W</p> <p>Weight: 0.5 kg</p>	<p>IP Rating: Colour:</p>	<p>IP20 (indoor use only) Black</p>
--	-------------------------------	---

FEATURES:

- 3-phase track light Pin Spot
- Suitable for GU10 (AR111) light sources up to 100 watt
- Both horizontal and vertical rotatable

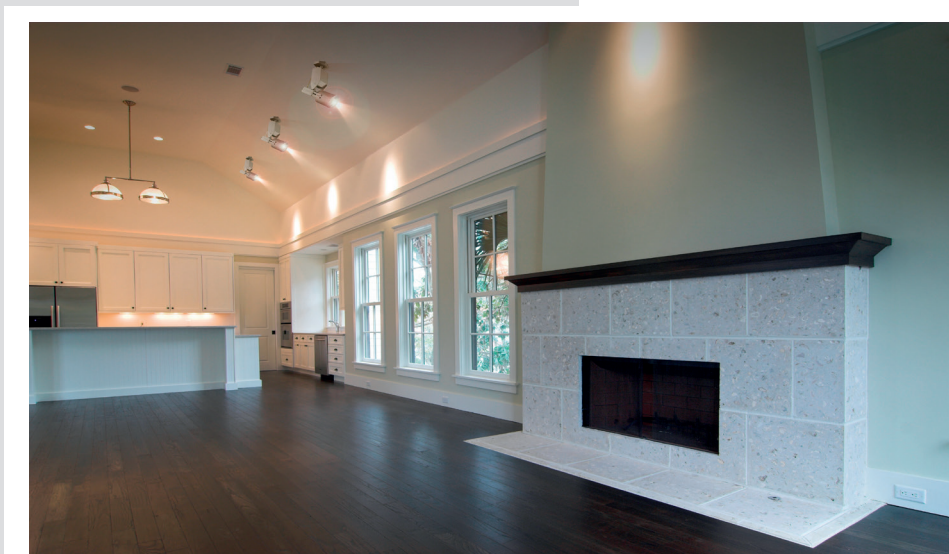

For white LED strips, please refer to page 45 and onwards.

Scan this QR code to find more information on track light accessories.





Home Applications

Stylish, practical, and cosy lighting solutions for in and around the house.

Smart Home – Wireless and Smart Home solutions offer a high level of comfort and flexibility. Our Smart Home products are compatible with Philips HUE and Zigbee. Our wireless and RF products provide a stand-alone solution.

ARTECTA



RGB – RGB LED strips offer a flexible solution for creating mood lights and accents.

RGBW – The added white LEDs offer a much more accurate white light, making the LED strip a capable all-in-one solution.

ZigBee Micro Smart Dimmer

A9915910 1-channel dimmer with ZigBee protocol

Specifications:	Length (mm):	45 mm
Control Mode:	Height (mm):	20,3 mm
Protocols:	Width (mm):	45 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Max. Output Current (A):		1.8 A

FEATURES:

- ZigBee and RF-remote supported dimmer
- 1 channel output, Up to 400 W
- ZigBee 3.0 mesh network
- Supports inductive loads
- Philips HUE compatible and other universal ZigBee gateway products





ZigBee LED controller 5 ch

A9916000 Compatible with ZigBee, Philips HUE and other smart home software

Specifications:	Length (mm):	145 mm
Control Mode:	Height (mm):	16 mm
Dimmable:	Width (mm):	46.5 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
		12-24 VDC

FEATURES:

- Philips HUE compatible and other universal ZigBee gateway products
- Zigbee 3.0 mesh network
- Control single colour, Tunable White, RGB(W) and RGB+CCT

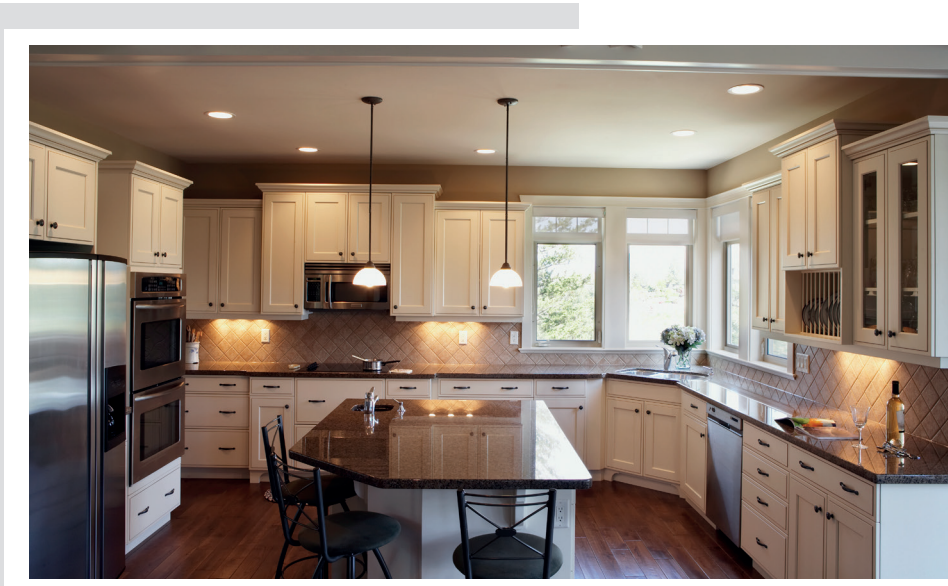

Play-V RF Receiver Waterproof

A9910036 Constant voltage single Colour

Specifications:	Length (mm):	181 mm
Control Mode:	Height (mm):	38 mm
RF Channels:	Width (mm):	74 mm
Power Supply:	IP Rating:	IP66
Max. Output Current (A):		5 A

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- IP66 (waterproof)
- 12–36 VDC / 5 A
- Push-dim
- Wi-Fi accessible (Easy Lighting app)
- Controllable via RF remotes



Play-V RF Receiver

A9910035 Constant voltage single Colour, remote control not included

Specifications:	Length (mm):	95 mm
Control Mode:	Height (mm):	20 mm
Power Supply:	Width (mm):	37 mm
Max. Output Current (A):	IP Rating:	IP20 (indoor use only)

FEATURES:

- 1-channel LED (strip) RF receiver
- Suitable for 1x single colour
- 12–36 VDC / 8 A
- Push-dim
- Controllable via RF remotes




Play-V RF Remote Control

A9915800 5 channels, single Colour

Specifications:	Length (mm):	136 mm
Control Mode:	Height (mm):	11 mm
RF Channels:	Width (mm):	39 mm
Battery Type:	IP Rating:	IP20 (indoor use only)
Power Supply:		5 VDC

FEATURES:

- 5x single colour RF remote
- Suitable for Play Receiver dimmers and Play Receiver to DMX
- Can be combined with RF Wall Panel series

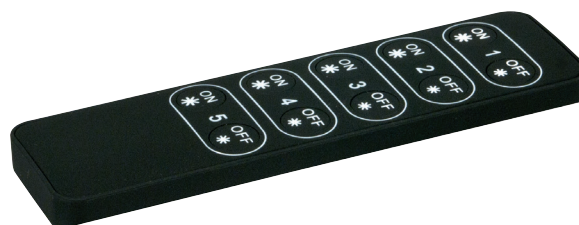


Play-XV RF Receiver

A9910020 Constant voltage multicolour

Specifications:	Length (mm):	179 mm
Control Mode:	Height (mm):	22 mm
RF Channels:	Width (mm):	46 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Max. Output Current (A):		5 A

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- 12–36 VDC / 5 A
- Dimmable
- Wi-Fi accessible (Easy Lighting app)
- Controllable via RF remotes





Play-XV RF Remote Control

A9990380 RGBW 8 zones

Specifications:	Height (mm):	25 mm
Control Mode:	Width (mm):	44 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Length (mm):		130 mm

FEATURES:

- Control up to 8 zones
- Control up to 4 channels per zone
- For 'Play' receivers

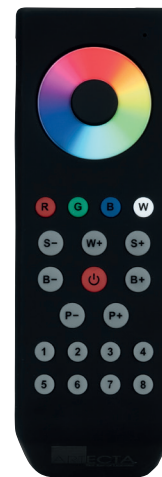

Play-XV Wall Panel Single Zone RGBW RF-DMX

A9990365 RF / DMX white

Specifications:	Height (mm):	31.5 mm
Control Mode:	Width (mm):	86 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Length (mm):		86 mm

FEATURES:

- Single zone
- Control up to 4 channels
- DMX and RF (868 MHz)
- 10 built-in programs, 4 user-programmable scenes
- Touch sensitive
- Intended for installation in flush-mounted junction box



Play-XV Wall Panel RGBW Wi-Fi-DMX

A9990366 Black 4 zones

Specifications:	Length (mm):	86 mm
Control Mode:	Height (mm):	31 mm
DMX Channels:	Width (mm):	86 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Output Voltage:		

FEATURES:

- Touch and Wi-Fi control
- Generates DMX signals
- Controls up to 4 zones, each with 4 channels




Play-XX Wall Panel RGBW RF

A9990375 White 4 zones

Specifications:	Height (mm):	31 mm
Control Mode:	Width (mm):	86 mm
Power Supply:	IP Rating:	IP20 (indoor use only)
Length (mm):		

FEATURES:

- Control up to 4 zones simultaneously
- Control up to 4 channels
- 10 built-in programs
- Touch sensitive
- Intended for installation in flush-mounted junction box



Play Single surface RF Remote

A9915802 868 MHz, On/Off, dimm

Specifications:	Length (mm):	86 mm
Control Mode:	Height (mm):	26.9 mm
Battery Type:	Width (mm):	86 mm
Power Supply:	IP Rating:	IP20 (indoor use only)

FEATURES:

- Play XV Remote
- For controlling single and dual colour devices
- Works in combination with RF Wall panel series
- ON/OFF
- Dimm function




Play-XV RF-Wi-Fi Receiver

A9910025 Constant voltage multicolour, remote control not included

Specifications:		Length (mm):	179 mm
Control Mode:	App / RF / Wi-Fi/LAN to RF	Height (mm):	22 mm
Power Supply:	12-36 VDC	Width (mm):	58 mm
Max. Output Current (A):	20 A	IP Rating:	IP20 (indoor use only)

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- 12-36 VDC / 20 A
- Dimmable
- Wi-Fi accessible (Easy Lighting app)
- Controllable via RF remotes



Our selection of LED strips starts from page 44.



ARTECTA

Commercial Locations

Make businesses stand out with a stylish and professional look!

Bars, restaurants, pubs, discotheques – Professional lights highlight the best assets of an establishment. A high CRI ensures that carefully designed interiors and objects appear in their natural colours. LED strips can be used for accent and ambient lighting, but also for adding effect lights, especially in pubs and discos.



RGB – RGB LED strips offer a flexible solution for creating mood lights and accents.

RGBW – The added white LEDs offer a much more accurate white light, making the LED strip a capable all-in-one solution.

Commercial Locations

Display Fresnel 20 SW


A0320100 20 W Switchable White LED Fresnel - Black

A0320101 20 W Switchable White LED Fresnel - White

Specifications:	Length (mm):	333 mm
Light Source Type:	Height (mm):	246 mm
LED Colour Type:	Width (mm):	187 mm
Lumen Total:	IP Rating:	IP20 (indoor use only)
CRI:	Colour:	Black/White
Dimmable:	Power Supply:	100-240 VAC 50-60 Hz
Power Consumption:		

FEATURES:

- 20 W LED Fresnel
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & barndoor included
- Available in either black and white



Display Fresnel 50 SW

A0320110 50 W Switchable White LED Fresnel - Black

A0320111 50 W Switchable White LED Fresnel - White

Specifications:	Length (mm):	245 mm
Light Source Type:	Height (mm):	239 mm
LED Colour Type:	Width (mm):	165 mm
Lumen Total:	IP Rating:	IP20 (indoor use only)
CRI:	Colour:	Black/White
Dimmable:	Power Supply:	100-240 VAC 50-60 Hz
Power Consumption:		

FEATURES:

- 50 W LED Fresnel
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & barndoor included
- Available in either black and white



Display Flood 80 SW

A0320120 80 W Switchable White LED Flood - Black

A0320121 80 W Switchable White LED Flood - White

Specifications:	Power Consumption:	80 W
Light Source Type:	Length (mm):	422 mm
LED Colour Type:	Height (mm):	373 mm
Lumen Total:	Width (mm):	285 mm
CRI:	IP Rating:	IP20 (indoor use only)
Beam Angle Circular:	Colour:	Black/White
Dimmable:	Power Supply:	100-240 VAC 50-60 Hz

FEATURES:

- 80 W LED Flood
- 2-step CCT: 3000 K & 6000 K
- Wide beam angle
- Dimmer function
- Available in either black and white



Display Profile 50 SW


A0320130 50 W Switchable White LED Profile - Black

A0320131 50 W Switchable White LED Profile - White

Specifications:		Length (mm):	411 mm
Light Source Type:	LED	Height (mm):	263 mm
LED Colour Type:	WW / CW	Width (mm):	170 mm
Lumen Total:	1504 lm	IP Rating:	IP20 (indoor use only)
CRI:	95	Colour:	Black/White
Dimmable:	Yes	Power Supply:	100-240 VAC 50-60 Hz
Power Consumption:	55 W		

FEATURES:

- 50 W LED Profile
- 2-step CCT: 3000 k & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & gobo holder included
- Available in either black and white



Our selection of LED strips starts from page 44.



Commercial Locations

Make businesses stand out with a stylish and professional look!

Stores – Products deserve to be seen as they were intended, so a natural light is important. A professional 3-phase track light system equipped with Display series provides exactly that.

ARTECTA



Newark 30W CCT Zoom 20°-60°


A0320220 Black

A0320221 White

Specifications:		Power Consumption:	35 W
Light Source Type:	LED	Weight:	0.95 kg
LED Colour Type:	WW / CW / NW	IP Rating:	IP20 (indoor use only)
CRI:	90	Colour:	Black/White
Dimmable (Type):	Leading Edge / Trailing edge / Triac	Lumen White:	2400 lm
Dimmable:	Yes	Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 30 W Dimmable White LED Track Light
- Manually adjustable 20°–60° zoom
- Suitable for 3-phase track rail
- Dimmable driver
- 2700 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- Available in black and white



New Port 15 W CCT 38°

A0320200 Black

A0320201 White

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	15 W
LED Colour Type:	WW / CW / NW	Weight:	0.55 kg
CRI:	90	IP Rating:	IP20 (indoor use only)
Dimmable (Type):	Leading Edge / Trailing edge / Triac	Colour:	Black/White
Beam Angle Circular:	38 °	Lumen White:	1200 lm
		Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 15 W Dimmable White LED Track Light
- Suitable for 3-phase track rail
- Dimmable driver
- 2700 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- 38° beam angle
- Available in black and white



New Port 30W CCT 38°

A0320210 Black

A0320211 White

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	35 W
LED Colour Type:	WW / CW / NW	Weight:	0.7 kg
CRI:	90	IP Rating:	IP20 (indoor use only)
Dimmable (Type):	Leading Edge / Trailing edge / Triac	Colour:	Black/White
Beam Angle Circular:	38 °	Lumen White:	2400 lm
		Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 30 W Dimmable White LED Track Light
- Suitable for 3-phase track rail
- Dimmable driver
- 2700 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- 38° beam angle
- Available in black and white



Commercial Locations

Display Track Fresnel 20 SW


A0320140 20 W Switchable White LED Fresnel - Black

A0320141 20 W Switchable White LED Fresnel - White

Specifications:		Power Consumption:	25 W
Light Source Type:	LED	Weight:	2.1 kg
LED Colour Type:	WW / CW	IP Rating:	IP20 (indoor use only)
Lumen Total:	537 lm	Colour:	Black/White
CRI:	95	Power Supply:	100-240 VAC 50-60 Hz
Dimmable:	Yes		

FEATURES:

- 20 W LED Track Light Fresnel
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle (13°–57°)
- Dimmer function
- Barndoor included
- Available in either black and white



Display Track Fresnel 50 SW


A0320150 50 W Switchable White LED Fresnel - Black

A0320151 50 W Switchable White LED Fresnel - White

Specifications:		Power Consumption:	55 W
Light Source Type:	LED	Weight:	2.1 kg
LED Colour Type:	WW / CW	IP Rating:	IP20 (indoor use only)
Lumen Total:	3373 lm	Colour:	Black/White
CRI:	95	Power Supply:	100-240 VAC 50-60 Hz
Dimmable:	Yes		

FEATURES:

- 50 W LED Track Light Fresnel
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle (18°–58°)
- Dimmer function
- Barndoor included
- Available in either black and white



Display Track Profile 50 SW

A0320160 50 W Switchable White LED Profile - Black

A0320161 50 W Switchable White LED Profile - White

Specifications:		Power Consumption:	50 W
Light Source Type:	LED	Weight:	2.86 kg
LED Colour Type:	WW / CW	IP Rating:	IP20 (indoor use only)
Lumen Total:	1504 lm	Colour:	Black/White
CRI:	95	Power Supply:	100-240 VAC 50-60 Hz
Dimmable:	Yes		

FEATURES:

- 50 W LED Track Light Profile
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 k & 6000 K
- Wide adjustable beam angle (13°–30°)
- Dimmer function
- Gobo holder included
- Available in either black and white



PAR 16 Track Light Warm-On-Dim

A0320070 Warm White LED Par - 500 lumen - 3-phase

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	8,7 W
LED Colour Type:	Warm-on-Dim	Weight:	0.34 kg
CRI:	95	IP Rating:	IP20 (indoor use only)
Dimmable (Type):	Triac	Colour:	Black
Beam Angle Circular:	36 °	Power Supply:	220V-240 VAC 50 Hz

FEATURES:

- 10 W / 500 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



PAR 20 Track Light Warm-On-Dim

A0320071 Warm White LED Par - 800 lumen - 3-phase

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	15 W
LED Colour Type:	Warm-on-Dim	Weight:	0.5 kg
Lumen Total:	800 lm	IP Rating:	IP20 (indoor use only)
CRI:	95	Colour:	Black
Dimmable (Type):	Triac	Power Supply:	240 VAC 50-60 Hz
Beam Angle Circular:	45 °		

FEATURES:

- 15 W / 800 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter




PAR 30 Track Light Warm-On-Dim

A0320072 Warm White LED Par - 1100 lumen - 3-phase

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	20 W
LED Colour Type:	Warm-on-Dim	Weight:	0.6 kg
Lumen Total:	1100 lm	IP Rating:	IP20 (indoor use only)
CRI:	95	Colour:	Black
Dimmable (Type):	Triac	Power Supply:	240 VAC 50-60 Hz
Beam Angle Circular:	45 °		

FEATURES:

- 20 W / 1100 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



Commercial Locations

PAR 46 Track Light Warm-On-Dim

A0320073 Warm White LED Par - 1800 lumen - 3-phase

Specifications:

Light Source Type: LED
LED Colour Type: Warm-on-Dim
Lumen Total: 1800 lm
CRI: 95
Dimmable (Type): Triac
Beam Angle Circular: 60 °

Dimmable: Yes
Power Consumption: 28 W
Weight: 1.48 kg
IP Rating: IP20 (indoor use only)
Colour: Black
Power Supply: 240 VAC 50-60 Hz

FEATURES:

- 28 W / 1800 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



PAR 56 Track Light Warm-On-Dim

A0320074 Warm White LED Par - 3380 lumen - 3-phase

Specifications:

Light Source Type: LED
LED Colour Type: Warm-on-Dim
Lumen Total: 3380 lm
CRI: 95
Dimmable (Type): Triac
Beam Angle Circular: 60 °

Dimmable: Yes
Power Consumption: 35 W
Weight: 1.8 kg
IP Rating: IP20 (indoor use only)
Colour: Black
Power Supply: 240 VAC 50-60 Hz

FEATURES:

- 35 W / 3380 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



For white LED strips, please refer to page 45 and onwards.

Scan this QR code to find more information on track light accessories.





Commercial Locations

Make businesses stand out with a stylish and professional look!

Terraces and Parks –The Carlow and Sonora spots are designed for outdoor usage and have IP ratings that allow them to be applied in wet circumstances.

ARTECTA



IP68 – For permanent outdoor installations we advise the use of IP68-rated LED strips. They provide the necessary protection for the demanding outdoor conditions.

Sonora 1R 6W COB 3000 K 24° HONEYCOMB

A0525140 Dimmable 5 W Warm White Recessed Ground LED Spot IP67

Specifications:

Light Source Type: LED
 LED Colour Type: WW
 Lumen Total: 180 lm
 CCT: 3000 K
 Dimmable (Type): Trailing edge
 Beam Angle Circular: 24 °
 Dimmable: Yes

Power Consumption: 6 W
 Protection Class: II
 Mounting Size: Ø 85 mm
 Mounting Depth: 121 mm
 IP Rating: IP67
 Power Supply: 220V-240 VAC 50 Hz
 IK Rating: 08

FEATURES:

- 5 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Sonora 2R 10W COB 3000K 24° HONEYCOMB

A0525240 Dimmable 10 W Warm White Recessed Ground LED Spot IP67

Specifications:

Light Source Type: LED
 LED Colour Type: WW
 Lumen Total: 313 lm
 CCT: 3000 K
 Dimmable (Type): Trailing edge
 Beam Angle Circular: 24 °
 Dimmable: Yes

Power Consumption: 7.3 W
 Protection Class: II
 Mounting Size: Ø 119 mm
 Mounting Depth: 135 mm
 IP Rating: IP67
 Power Supply: 220V-240 VAC 50 Hz
 IK Rating: 08

FEATURES:

- 10 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Sonora 3R 15 W COB 3000 K 24° HONEYCOMB

A0525340 Dimmable 15 W Warm White Recessed Ground LED Spot IP67

Specifications:

Light Source Type: LED
 LED Colour Type: WW
 Lumen Total: 723 lm
 CCT: 3000 K
 Dimmable (Type): Trailing edge
 Beam Angle Circular: 24 °
 Dimmable: Yes

Power Consumption: 14.6 W
 Protection Class: II
 Mounting Size: Ø 147 mm
 Mounting Depth: 160 mm
 IP Rating: IP67
 Power Supply: 220V-240 VAC 50 Hz
 IK Rating: 08

FEATURES:

- 15 W recessed ground CREE COB LED light
- Freely dimmable to 15%
- Honeycomb filter
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage



Carlow 21 RGB 7/3

A0720050 7 x 3 W 3-in-1 LED


Specifications:

Light Source Type: LED
 Lumen Total: 630 lm
 Beam Angle Circular: 18 °
 Power Consumption: 22 W
 Length (mm): 178 mm

Height (mm): 156 mm
 Width (mm): 113 mm
 IP Rating: IP66
 Colour: Dark Grey
 Power Supply: 240 VAC 50-60 Hz

FEATURES:

- 7x 3 W RGB LED spot
- IP66
- 630 lumen output
- 18° beam angle
- Manual, DMX & Master/Slave control



Carlow 72 RGB 24/3

A0720051 24 x 3 W 3-in-1 LED


Specifications:

Light Source Type: LED
 Lumen Total: 2404 lm
 Beam Angle Circular: 18 °
 Dimmable: Yes
 Power Consumption: 78 W


Length (mm): 270 mm
 Height (mm): 170 mm
 Width (mm): 327 mm
 IP Rating: IP66
 Colour: Dark Gray
 Power Supply: 240 VAC 50-60 Hz

FEATURES:

- 24x 3 W RGB LED spot
- IP66
- 2404 lumen output
- 18° beam angle
- Manual, DMX & Master/Slave control



LED strips for permanent outdoor use (IP68) can be found on page 70/71.

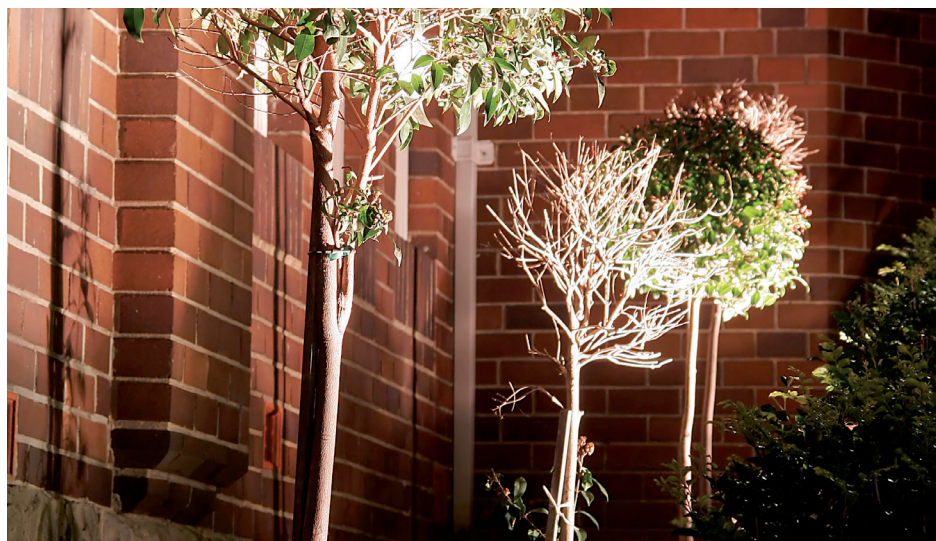



ARTECTA

Commercial Locations

Make businesses stand out with a stylish and professional look!

Gyms – Recessed lights and LED strips provide a safe lighting solution for gyms. The lighting is spread out evenly and there are no protruding elements that can be damaged or pose a hazard for gymnastic activities. The Display Series completes the installation with flood lights and zoomable spots and fresnels.



RGB – RGB LED strips offer a flexible solution for creating mood lights and accents.

RGBW – The added white LEDs offer a much more accurate white light, making the LED strip a capable all-in-one solution.

Malia-68 3000 K - 6 W


A0135291 Dimmable LED Recessed Spotlight - black

A0135290 Dimmable LED Recessed Spotlight - white

Specifications:		Power Consumption:	6 W
Light Source Type:	LED	Driver:	Built-in
LED Colour Type:	WW	Ø:	81 mm
Lumen Total:	405 lm	IP Rating:	IP44
CRI:	83	Mounting Depth:	79 mm
CCT:	3000 K	Mounting Size:	Ø 68-73 mm
Dimmable:	Yes		

FEATURES:

- Dimmable 6 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 68–73 mm/2.68”–2.87” and 79 mm height
- Available in black and white



Malia-90 3000 K - 9 W

A0135301 Dimmable LED Recessed Spotlight - black

A0135300 Dimmable LED Recessed Spotlight - white

Specifications:		Power Consumption:	9 W
Light Source Type:	LED	Driver:	Built-in
LED Colour Type:	WW	Ø:	103 mm
Lumen Total:	637 lm	IP Rating:	IP44
CRI:	83	Mounting Depth:	91 mm
CCT:	3000 K	Mounting Size:	Ø 90-95 mm
Dimmable:	Yes		

FEATURES:

- Dimmable 9 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 90–95 mm/3.54”–3.74” & 91 mm height (3.58”)
- Available in black and white



Athena 68 Round 3000 K adj.

A0135287 White 220 V / 7 W, 90°, 590 lm dimm. IP20

Specifications:		Power Consumption:	7 W
Light Source Type:	LED	Driver:	Included
LED Colour Type:	W / WW / CW	Ø:	95 mm
Lumen Total:	550 lm	IP Rating:	IP20 (indoor use only)
CRI:	80	Mounting Depth:	575 mm
CCT:	0 K	Mounting Size:	Ø 68-80 mm
Dimmable:	Yes		

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K–4000 K - 6000 K
- CRI >80



Commercial Locations

Athena 90 Round 3000 K adj.

A0135289 White 230 V / 9 W, 90°, 800 lm dimm. IP20


Specifications:

Light Source Type: LED
LED Colour Type: W / WW / CW
Lumen Total: 800 lm
CRI: 80
CCT: 0 K

Power Consumption: 9 W
Driver: Included
Ø: 113 mm
IP Rating: IP20 (indoor use only)
Mounting Depth: 58 mm
Mounting Size: Ø 90-102 mm

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K-4000 K - 6000 K
- CRI >80



Our selection of LED strips starts from page 44.

Please find our selection of aluminium profiles for LED strips






ARTECTA

Architectural Solutions

Arctecta offers high-quality and modern architectural solutions and accessories for design lighting, retail environments,

– hospitality industry, suitable for projects of any size.

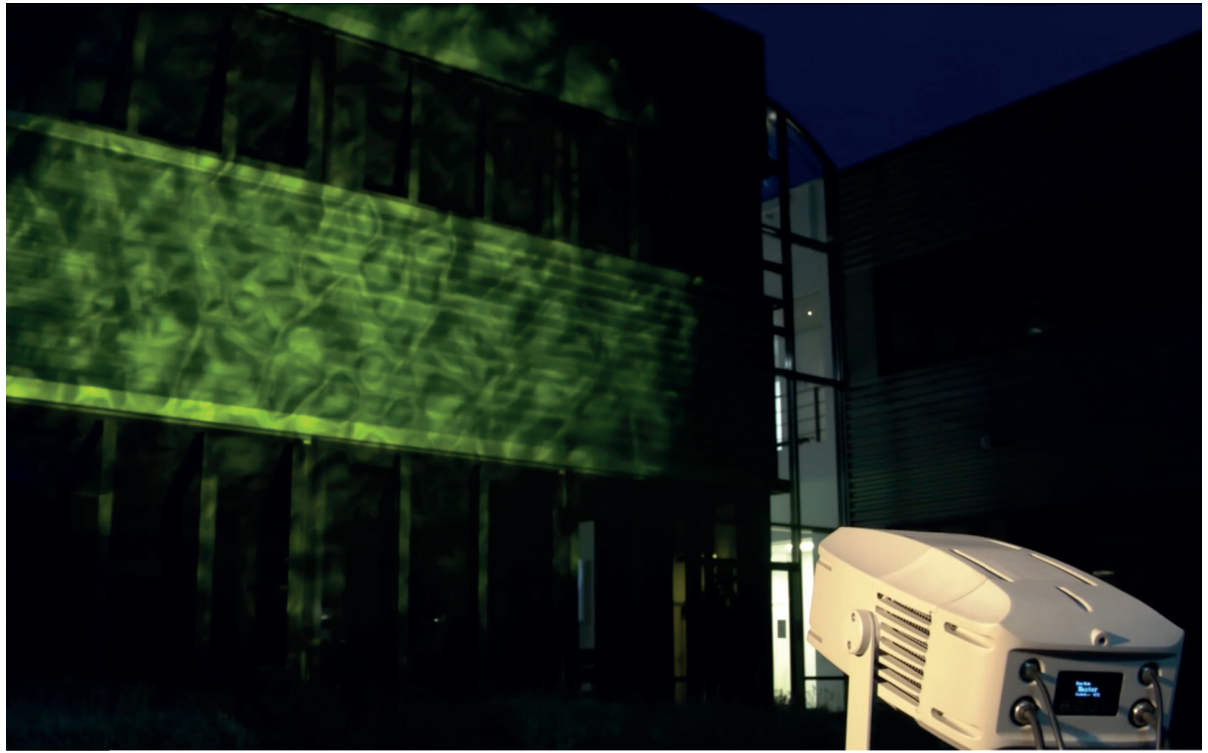


Architectural

An extensive range of products for covering all in and outdoor situations in professional environments.

Façades – Moving projections will most certainly draw the attention of passers-by. The Aqua Spot and Image Spot have what it takes to withstand the outdoor environment and project dynamic effects on any surface.

ARTECTA

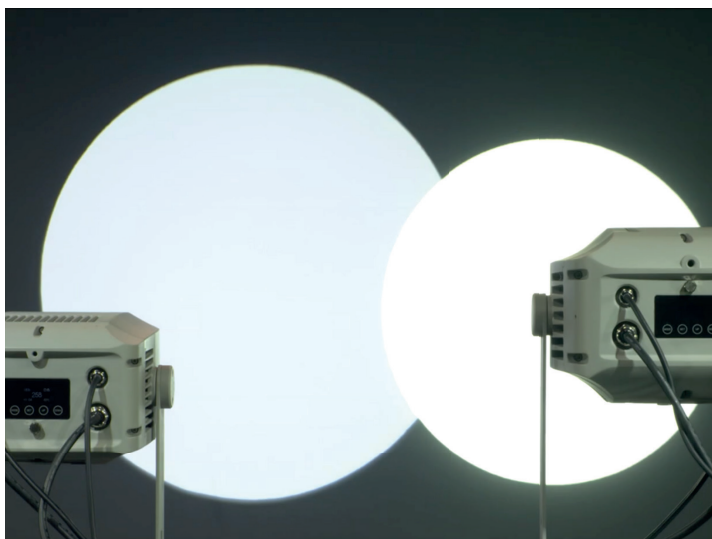

IP68 – For permanent outdoor installations we advise the use of IP68-rated LED strips. They provide the necessary protection for the demanding outdoor conditions.

LED strips for permanent outdoor use (IP68) can be found on page 70/71.

Aqua Spot 200

A0690001 200 W LED projector spot with water pattern

Specifications:		Length (mm):	560 mm
Light Source Type:	LED	Height (mm):	200 mm
LED Colour Type:	CW	Width (mm):	318 mm
Lumen Total:	3900 lm	IP Rating:	IP65
Beam Angle Circular:	35 °	Colour:	Light Grey
Dimmable:	Yes	Power Supply:	100-240 VAC 50-60 Hz
Power Consumption:	220 W		

FEATURES:

- 200 W CW LED water effect projector
- Colour wheel with 7 colours
- IP65 rated, suitable for outdoor use
- Strobe, dimmer and focus function
- Wide beam angle
- Optional IP65 DMX connectors




Image Spot 100

A0690100 100 W LED gobo projector spot with colour wheel

Specifications:		Length (mm):	315 mm
Light Source Type:	LED	Height (mm):	318 mm
LED Colour Type:	CW	Width (mm):	249 mm
Lumen Total:	2600 lm	IP Rating:	IP65
Dimmable:	Yes	Colour:	Light Grey
Power Consumption:	110 W	Power Supply:	100-240 VAC 50-60 Hz

FEATURES:

- 100 W / 2600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable



Image Spot 200

A0690101 200 W LED gobo projector spot with colour wheel

Specifications:		Length (mm):	560 mm
Light Source Type:	LED	Height (mm):	200 mm
LED Colour Type:	CW	Width (mm):	318 mm
Lumen Total:	6600 lm	IP Rating:	IP65
Dimmable:	Yes	Colour:	Light Grey
Power Consumption:	220 W	Power Supply:	100-240 VAC 50-60 Hz

FEATURES:

- 200 W / 6600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable





Architectural

An extensive range of products for covering all in and outdoor situations in professional environments.

Offices – Modern LED ceiling panels for the office environment provide diffuse warm or neutral white light. Olympia LED panels are drop-in replacements for conventional tube lighting and constant current (CC) compatible to provide an even brightness throughout a larger system.

ARTECTA



White – Pure white LED strips are available in warm and cold white. Combined with a profile with a milky-white cover, they provide a very evenly spread lighting.

Olympia LED Panel 30x120 3000 K

A0160120 2835 LED

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	WW	Driver:	Included
Lumen Total:	4100 lm	IP Rating:	IP20 (indoor use only)
CRI:	80	Colour:	White
CCT:	3000 K	Mounting Depth:	11 mm

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 3000 K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional when combined with external dimmer




Olympia LED Panel 30x120 4000 K

A0160130 2835 LED

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	NW	Driver:	Included
Lumen Total:	4220 lm	IP Rating:	IP20 (indoor use only)
CRI:	80	Colour:	White
CCT:	4000 K	Mounting Depth:	11 mm

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 4000 K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional



Olympia LED Panel 60x60 3000 K

A0160100 2835 LED

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	WW	Driver:	Included
Lumen Total:	3920 lm	IP Rating:	IP20 (indoor use only)
CRI:	80	Colour:	White
CCT:	3000 K	Mounting Depth:	11 mm
Dimmable (Type):	Optional	Mounting Size:	595 x 595 x 11

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 3000 K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional when combined with external dimmer



Olympia LED Panel 60x60 4000 K

A0160110 2835 LED

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	NW	Driver:	Included
Lumen Total:	4240 lm	IP Rating:	IP20 (indoor use only)
CRI:	80	Colour:	White
CCT:	4000 K	Mounting Depth:	11 mm

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 4000 K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional when combined with external dimmer



Argos LED Panel 60x60 3000 K UGR<19

A0160200 40 W Ceiling LED Panel - 60 x 60 cm

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	WW	Driver:	Included
Lumen Total:	3752 lm	IP Rating:	IP20 (indoor use only)
CRI:	83	Colour:	White
CCT:	3000 K	Mounting Depth:	34 mm
UGR:	<19		

FEATURES:

- 60 x 60 cm LED panel (1.97 x 197 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 W - 3752 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 30 x 120 cm (0.98 x 3.94 ft)



Argos LED Panel 60x60 4000 K - UGR<19

A0160201 40 W Ceiling LED Panel - 60 x 60 cm

Specifications:		Dimmable:	No
Light Source Type:	LED	Power Consumption:	40 W
LED Colour Type:	NW	Driver:	Included
Lumen Total:	3805 lm	IP Rating:	IP20 (indoor use only)
CRI:	83	Colour:	White
CCT:	4000 K	Mounting Depth:	34 mm
UGR:	<19		

FEATURES:

- 60 x 60 cm LED panel (1.97 x 197 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 W - 3805 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 30 x 120 cm (0.98 x 3.94 ft)



Argos LED Panel 30x120 3000 K- UGR<19

A0160210 40 W Ceiling LED Panel - 30 x 120 cm

Specifications:

Light Source Type: LED
 LED Colour Type: WW
 Lumen Total: 3752 lm
 CRI: 83
 CCT: 3000 K
 UGR: <19

Dimmable: No
 Power Consumption: 40 W
 Driver: Included
 IP Rating: IP20 (indoor use only)
 Colour: White
 Mounting Depth: 34 mm

FEATURES:

- 30 x 120 cm LED panel (0.98 x 3.94 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 W - 3752 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 60 x 60 cm (1.97 x 197 ft)



Argos LED Panel 30x120 4000 K- UGR <19

A0160211 40 W Ceiling LED Panel - 30 x 120 cm


Specifications:

Light Source Type: LED
 LED Colour Type: WW
 Lumen Total: 3942 lm
 CRI: 83
 CCT: 4000 K
 UGR: <19

Dimmable: No
 Power Consumption: 40 W
 Driver: Included
 IP Rating: IP20 (indoor use only)
 Colour: White
 Mounting Depth: 34 mm

FEATURES:

- 30 x 120 cm LED panel (0.98 x 3.94 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 W - 3942 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 60 x 60 cm (1.97 x 197 ft)



For white LED strips, please refer to page 45 and onwards.





Architectural

An extensive range of products for covering all in and outdoor situations in professional environments.

Expositions – Expositions require a low UV radiation and high CRI for accurate colour rendering. Professional 3-phase LED track lights compatible with traditional halogen infrastructure provide a solid as well as energy-saving solution.

ARTECTA



White – Pure white LED strips are available in warm and cold white. Combined with a profile with a milky-white cover, they provide a very evenly spread lighting.

Display Track Profile 50 SW

A0320160 50 W Switchable White LED Profile - Black

A0320161 50 W Switchable White LED Profile - White

Specifications:		Dimmable:	Yes
Light Source Type:	LED	Power Consumption:	55 W
LED Colour Type:	WW / CW	Weight:	5.6 kg
Lumen Total:	1504 lm	IP Rating:	IP20 (indoor use only)
CRI:	95	Colour:	Black/White

FEATURES:

- 50 W LED Track Light Profile
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle (13°–30°)
- Dimmer function
- Gobo holder included
- Available in either black and white



Display Profile 50 SW


A0320130 50 W Switchable White LED Profile - Black

A0320131 50 W Switchable White LED Profile - White

Specifications:		Power Consumption:	55 W
Light Source Type:	LED	Length (mm):	411 mm
LED Colour Type:	WW / CW	Height (mm):	263 mm
Lumen Total:	1504 lm	Width (mm):	170 mm
CRI:	95	IP Rating:	IP20 (indoor use only)
Dimmable:	Yes	Colour:	Black/White

FEATURES:

- 50 W LED Profile
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & gobo holder included
- Available in either black and white



For white LED strips, please refer to page 45 and onwards.

Scan this QR code to find more information on track light accessories.





Signage

Striking signage to inform the crowds.

Outdoor signage – Project logos, information, and dynamic effects to draw the attention of passers-by.

ARTECTA



IP68 – For permanent outdoor installations we advise the use of IP68-rated LED strips. They provide the necessary protection for the demanding outdoor conditions.

Image Spot 100

A0690100 100 W LED gobo projector spot with colour wheel

Specifications:		Length (mm):	315 mm
Light Source Type:	LED	Height (mm):	318 mm
LED Colour Type:	CW	Width (mm):	249 mm
Lumen Total:	2600 lm	IP Rating:	IP65
Dimmable:	Yes	Colour:	Light Grey
Power Consumption:	110 W		

FEATURES:

- 100 W / 2600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable




Image Spot 200

A0690101 200 W LED gobo projector spot with colour wheel

Specifications:		Length (mm):	560 mm
Light Source Type:	LED	Height (mm):	200 mm
LED Colour Type:	CW	Width (mm):	318 mm
Lumen Total:	6600 lm	IP Rating:	IP65
Dimmable:	Yes	Colour:	Light Grey
Power Consumption:	220 W		

FEATURES:

- 200 W / 6600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable



Please find our LED strips for signage applications on page 72.





LED Strips

From professional and practical to flamboyant or subtle, LED strips offer versatile solutions for a broad spectrum of applications.

White – Pure white LED strips are available in warm and cold white. Combined with a profile with a milky-white cover, they provide a very evenly spread lighting.

RGB – Offer a flexible solution for creating mood lights and accents.


RGBW – The added white LEDs offer a much more accurate white light, making the LED strip a capable all-in-one solution.

UV – Create a dark ambiance with UV LED strips. Use them as a black light with fluorescent effects or in situations where very low brightness is requested.

Humid & Wet Conditions – Solutions for humid environments require an additional layer of protection. An IP44 rating makes LED strips suitable for wet indoor applications.

Outdoor Permanent Use – For permanent outdoor installations we advise the use of IP68-rated LED strips. They provide the necessary protection for the demanding outdoor conditions.

ARTECTA

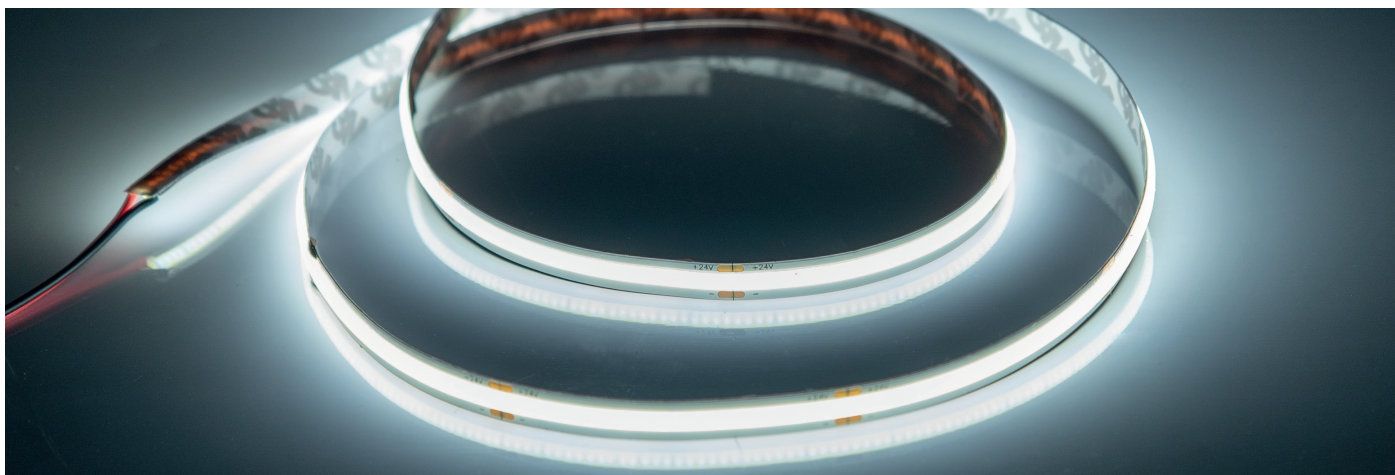

Havana Halo COB - 512

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0851027	512	COB	1000 lm	WW - 2700 K	90	24 VDC	10 W	5 m	62.5 mm	8 mm	IP20
A0851030	512	COB	1080 lm	WW - 3000 K	90	24 VDC	10 W	5 m	62.5 mm	8 mm	IP20
A0851040	512	COB	1150 lm	NW - 4000 K	90	24 VDC	10 W	5 m	62.5 mm	8 mm	IP20
A0851060	512	COB	1100 lm	CW - 6000 K	90	24 VDC	10 W	5 m	62.5 mm	8 mm	IP20



Havana Flex 3528 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852300	60	SMD3528	408 lm	WW - 2700 K	82	24 VDC	4.8 W	5 m	100 mm	6 mm	IP20
A0852301	60	SMD3528	440 lm	WW - 3000 K	82	24 VDC	4.8 W	5 m	100 mm	6 mm	IP20
A0852302	60	SMD3528	460 lm	NW - 4000 K	82	24 VDC	4.8 W	5 m	100 mm	6 mm	IP20

LED Strips



Havana Ribbon 1808 - 140

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852600	140	SMD1808	750 lm	WW - 2700 K	90	24 VDC	7.2 W	5 m	50 mm	3 mm	IP20
A0852601	140	SMD1808	780 lm	WW - 3000 K	90	24 VDC	7.2 W	5 m	50 mm	3 mm	IP20
A0852602	140	SMD1808	812 lm	NW - 4000 K	90	24 VDC	7.2 W	5 m	50 mm	3 mm	IP20



Havana Ribbon 1808 - 350

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852610	350	SMD1808	1850 lm	WW - 2700 K	90	24 VDC	18 W	5 m	20 mm	10 mm	IP20
A0852611	350	SMD1808	1920 lm	WW - 3000 K	90	24 VDC	18 W	5 m	20 mm	10 mm	IP20
A0852612	350	SMD1808	2016 lm	NW - 4000 K	90	24 VDC	18 W	5 m	20 mm	10 mm	IP20



Havana Ribbon Single Cut 2835 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852570	60	SMD2835	580 lm	WW - 2700 K	90	24 VDC	7.2 W	5 m	16.7 mm	8 mm	IP20
A0852571	60	SMD2835	650 lm	WW - 3000 K	90	24 VDC	7.2 W	5 m	16.7 mm	8 mm	IP20
A0852572	60	SMD2835	700 lm	NW - 4000 K	90	24 VDC	7.2 W	5 m	16.7 mm	8 mm	IP20



Havana Ribbon Single Cut 2835 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852573	120	SMD2835	750 lm	WW - 2700 K	90	24 VDC	9.6 W	5 m	8.3 mm	8 mm	IP20
A0852574	120	SMD2835	820 lm	WW - 3000 K	90	24 VDC	9.6 W	5 m	8.3 mm	8 mm	IP20
A0852575	120	SMD2835	900 lm	NW - 4000 K	90	24 VDC	9.6 W	5 m	8.3 mm	8 mm	IP20



Havana Ribbon 2835 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852070	60	SMD2835	1240 lm	WW - 2700 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852071	60	SMD2835	1260 lm	WW - 3000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852072	60	SMD2835	1290 lm	NW - 4000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20



Havana Ribbon 2835 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852076	120	SMD2835	2450 lm	WW - 2700 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP20
A0852077	120	SMD2835	2510 lm	WW - 3000 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP20
A0852078	120	SMD2835	2580 lm	NW - 4000 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP20



Havana Ribbon 2835 - 240

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852105	240	SMD2835	4710 lm	WW - 2700 K	85	24 VDC	48 W	5 m	25 mm	12 mm	IP20
A0852106	240	SMD2835	4790 lm	WW - 3000 K	85	24 VDC	38 W	5 m	25 mm	12 mm	IP20
A0852107	240	SMD2835	4820 lm	NW - 4100 K	85	24 VDC	38.4 W	5 m	25 mm	12 mm	IP20



Havana Ribbon 3528 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852030	60	SMD3528	430 lm	WW - 2700 K	85	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20
A0852031	60	SMD3528	440 lm	WW - 3000 K	85	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20
A0852034	60	SMD3528	450 lm	NW - 4000 K	85	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20



Havana Ribbon 3528 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852043	120	SMD3528	810 lm	WW - 2400 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852040	120	SMD3528	810 lm	WW - 2700 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852041	120	SMD3528	830 lm	WW - 3000 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852044	120	SMD3528	850 lm	NW - 4000 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20

LED Strips



Havana Ribbon 3528 - 60 - CRI 90

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852580	60	SMD3528	350 lm	WW - 2400 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20
A0852581	60	SMD3528	380 lm	WW - 2700 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20
A0852582	60	SMD3528	400 lm	WW - 3000 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20
A0852583	60	SMD3528	410 lm	NW - 4000 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP20



Havana Ribbon 3528 - 120 - CRI 90

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852584	120	SMD3528	640 lm	WW - 2400 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852585	120	SMD3528	680 lm	WW - 2700 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852586	120	SMD3528	770 lm	WW - 3000 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20
A0852587	120	SMD3528	840 lm	NW - 4000 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP20




Santiago Ribbon 3528 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852200	60	SMD3528	400 lm	WW - 2400 K	85	24 VDC	4.8 W	20 m	100 mm	10 mm	IP20
A0852201	60	SMD3528	420 lm	WW - 2700 K	85	24 VDC	4.8 W	20 m	100 mm	10 mm	IP20
A0852202	60	SMD3528	450 lm	WW - 3000 K	85	24 VDC	4.8 W	20 m	100 mm	10 mm	IP20
A0852203	60	SMD3528	460 lm	NW - 4000 K	85	24 VDC	4.8 W	20 m	100 mm	10 mm	IP20



Santiago Ribbon 3528 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852220	120	SMD3528	760 lm	WW - 2400 K	85	24 VDC	9.6 W	20 m	50 mm	10 mm	IP20
A0852221	120	SMD3528	780 lm	WW - 2700 K	85	24 VDC	9.6 W	20 m	50 mm	10 mm	IP20
A0852222	120	SMD3528	850 lm	WW - 3000 K	85	24 VDC	9.6 W	20 m	50 mm	10 mm	IP20
A0852223	120	SMD3528	840 lm	NW - 4000 K	85	24 VDC	9.6 W	20 m	50 mm	10 mm	IP20

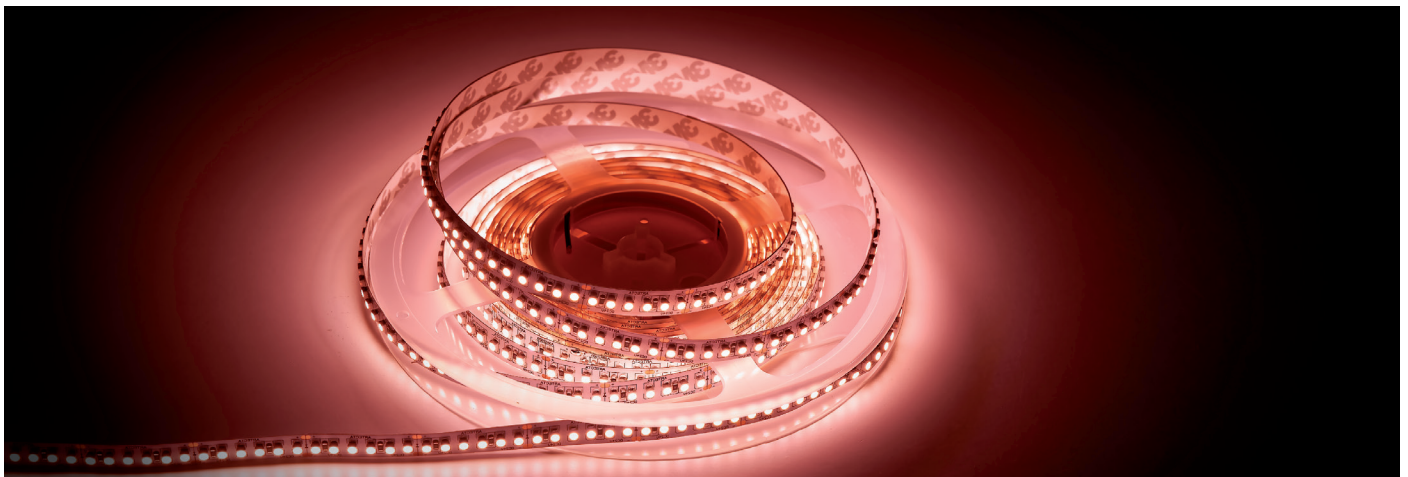

Havana Food 3528 - 180

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852500	180	SMD3528	800 lm	Meat/Bacon	2000 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20
A0852501	180	SMD3528	800 lm	Bread/Cake	2400 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20
A0852502	180	SMD3528	800 lm	Dairy/Gold	2700 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20
A0852503	180	SMD3528	800 lm	Fruit	3000 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20
A0852504	180	SMD3528	800 lm	Fresh meat	3500 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20
A0852505	180	SMD3528	800 lm	Seafood	4200 K	85	24 VDC	14.4 W	5 m	33.3 mm	10 mm	IP20



Havana Ribbon 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852050	60	SMD5050	1210 lm	2700 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852051	60	SMD5050	1250 lm	3000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852054	60	SMD5050	1280 lm	4000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP20



Havana Ribbon Tunable 3528 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852350	120	SMD3528	800 lm	WW / CW 2200-6000 K	85	24 VDC	9.6 W	5 m	100 mm	8 mm	IP20
A0852020	120	SMD3528	1500 lm	WW / CW 3000-6000 K	82	24 VDC	19.2 W	5 m	50 mm	10 mm	IP20




Havana Ribbon Tunable 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852348	60	SMD5050	1105 lm	WW / CW 2200-6000 K	85	24 VDC	14.4 W	5 m	66.7 mm	10 mm	IP20




Havana Ribbon Warm on Dim

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0851100	168	SMD2835	1450 lm	WW 2000-2700 K	24 VDC	15 W	5 m	83 mm	10 mm	IP20

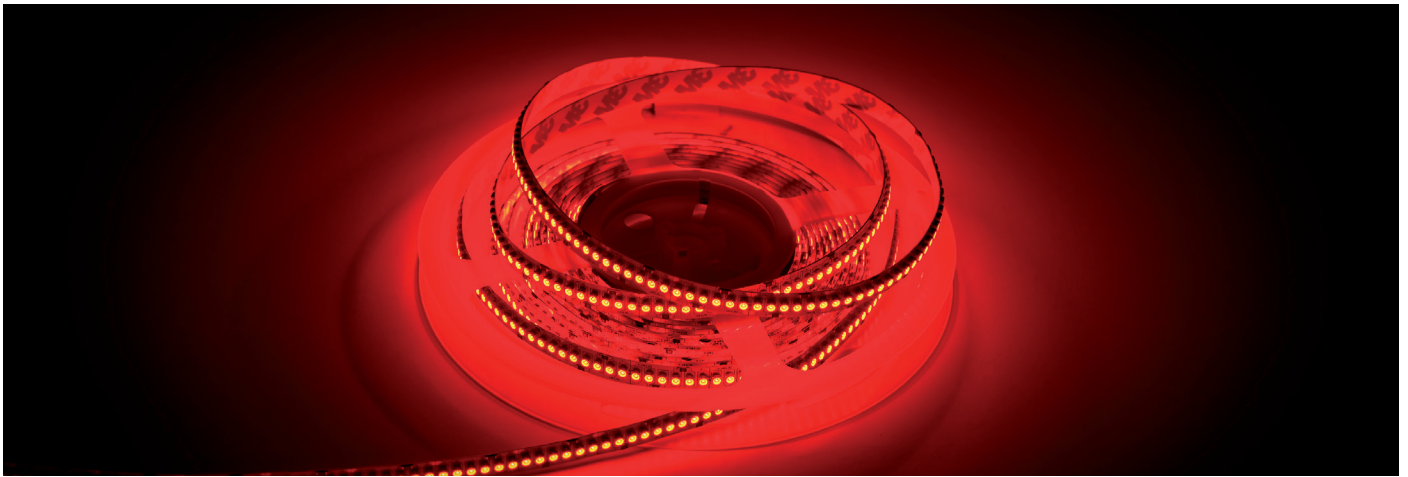


Havana Ribbon 3528 - 240 - Single Color

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852146	240	SMD3528	560 lm	R	■ 24 VDC	19.2 W	5 m	25 mm	10 mm	IP20

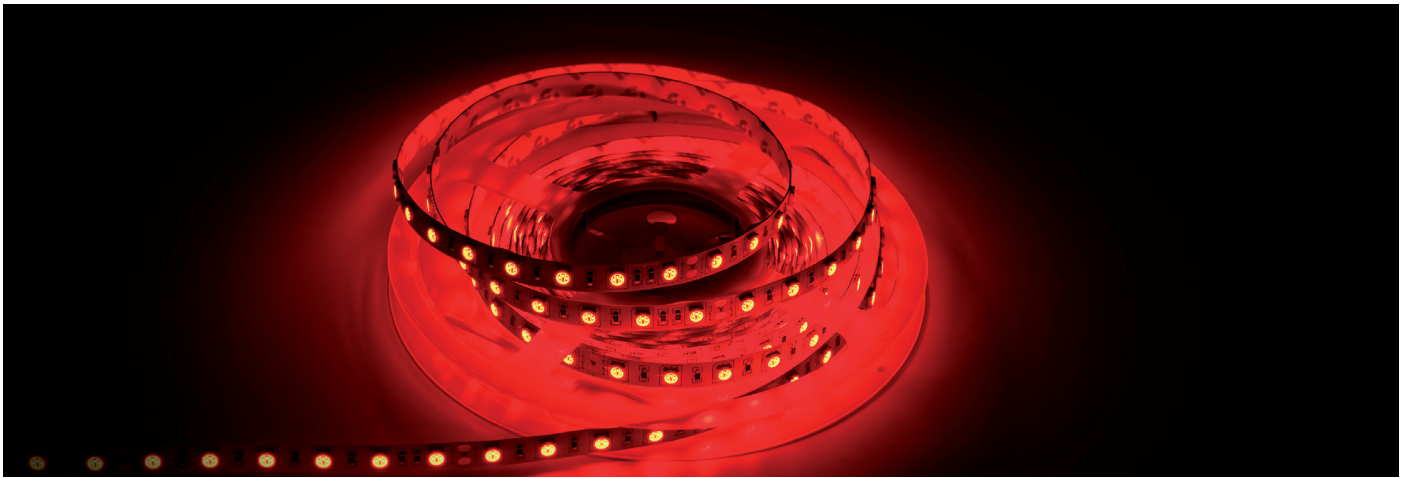


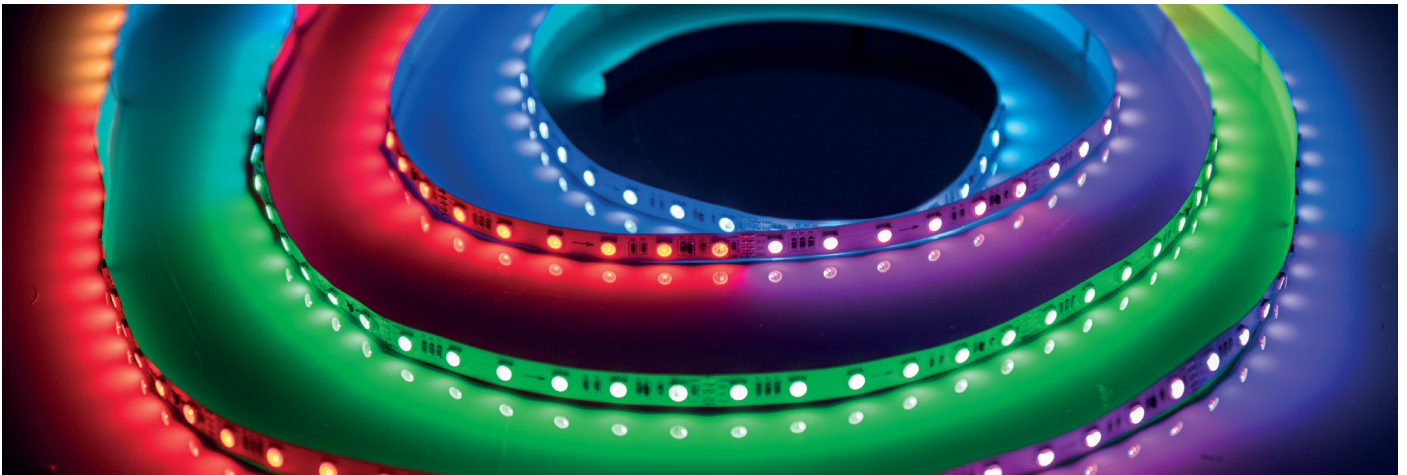
Havana Ribbon 5050 - 60 - Single Color

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852134	60	SMD5050	420 lm	R	■ 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852135	60	SMD5050	1110 lm	G	■ 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20
A0852136	60	SMD5050	240 lm	B	■ 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20

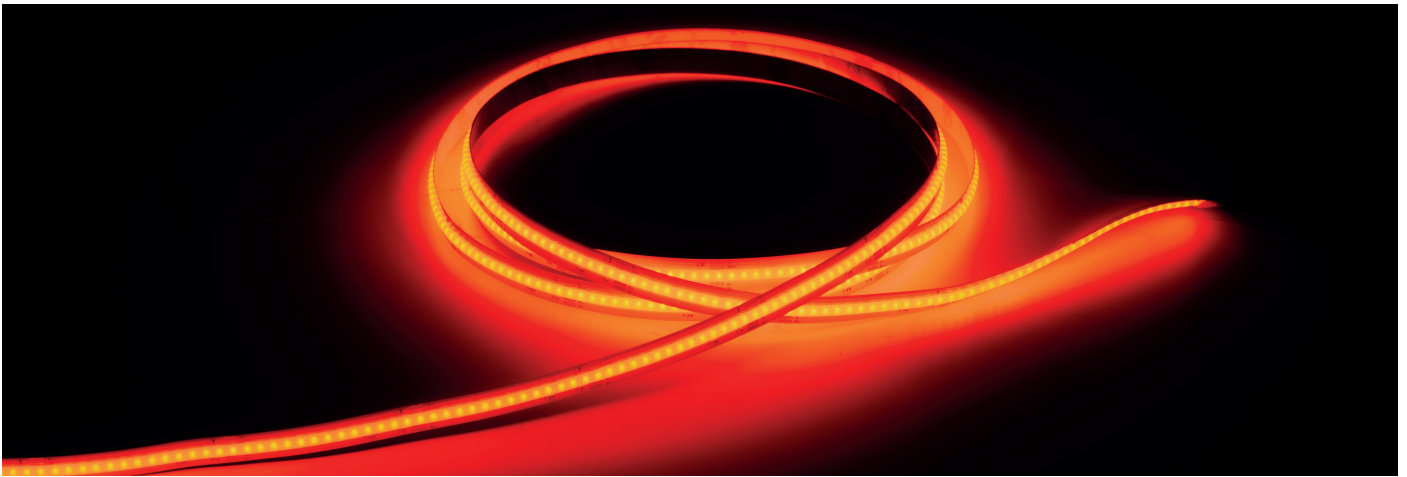


Havana Halo COB - 840


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852043	840	COB	718 lm	RGB	 24 VDC	9.6 W	5 m	50 mm	10 mm	IP20




Havana Pixel Strip 2811 - 60


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852126	60	SW2811	430 lm	RGB	 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20

LED Strips

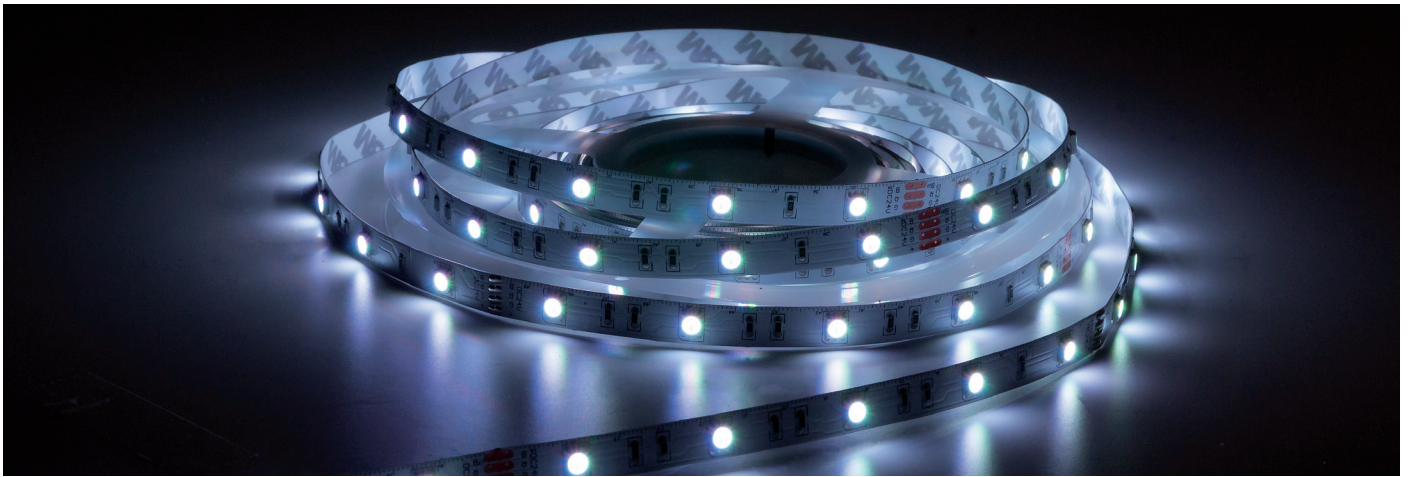



Havana Ribbon 5050 - 30 - White PCB


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852021	30	SMD5050	295 lm	RGB	 24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP20

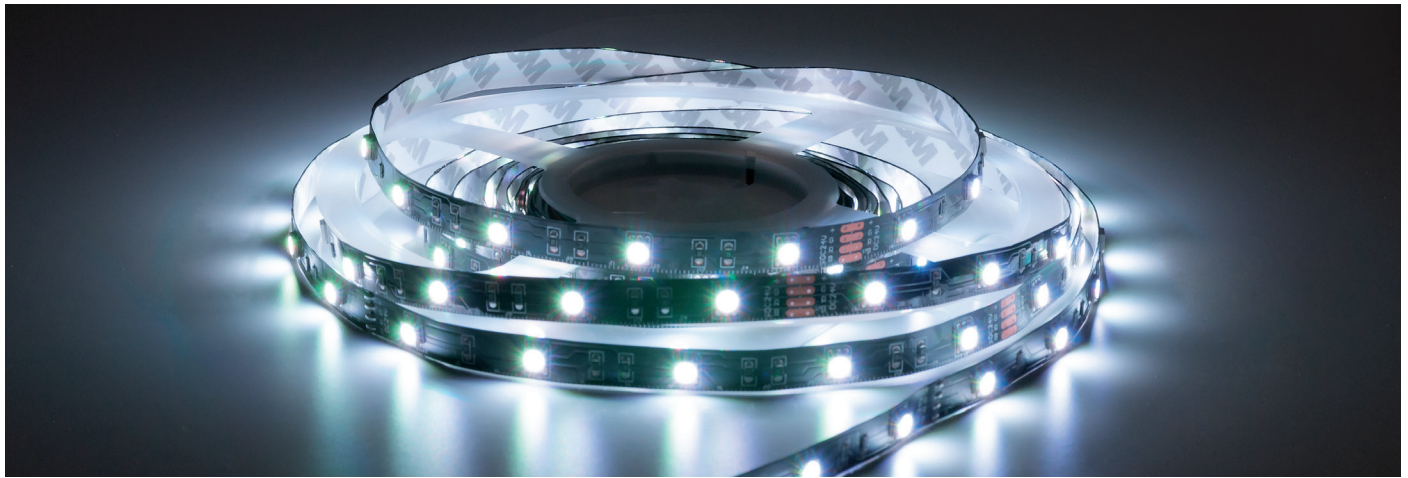


Havana Ribbon 5050 - 30 - Black PCB


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852001	30	SMD5050	295 lm	RGB	 24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP20



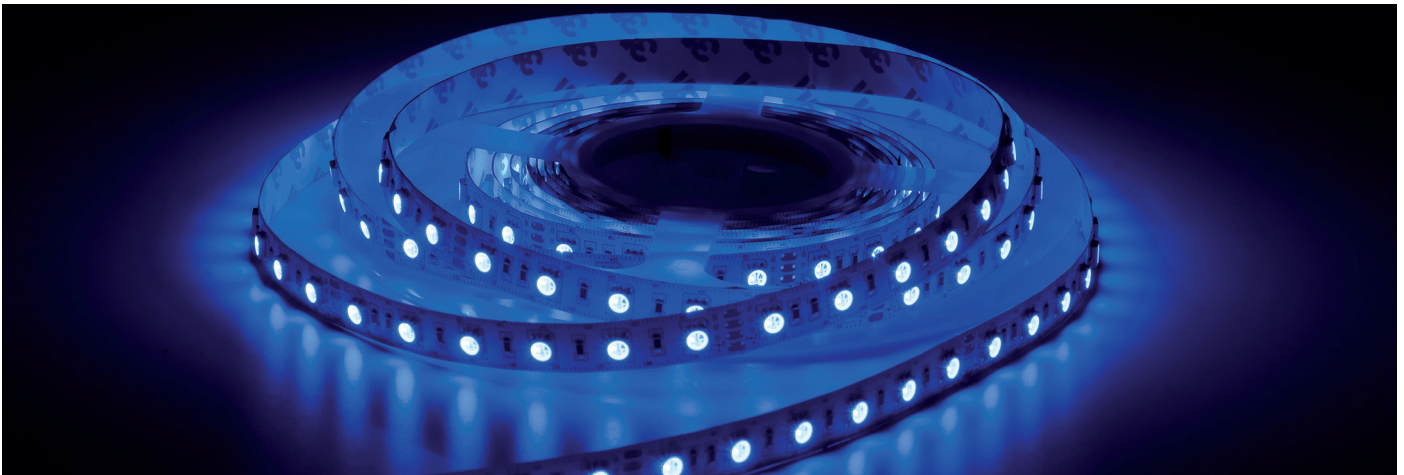



Havana Ribbon 5050 - 60 - White PCB


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852002	60	SMD5050	590 lm	RGB	 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20




Havana Ribbon 5050 - 60 - Black PCB


Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852022	60	SMD5050	590 lm	RGB	 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20



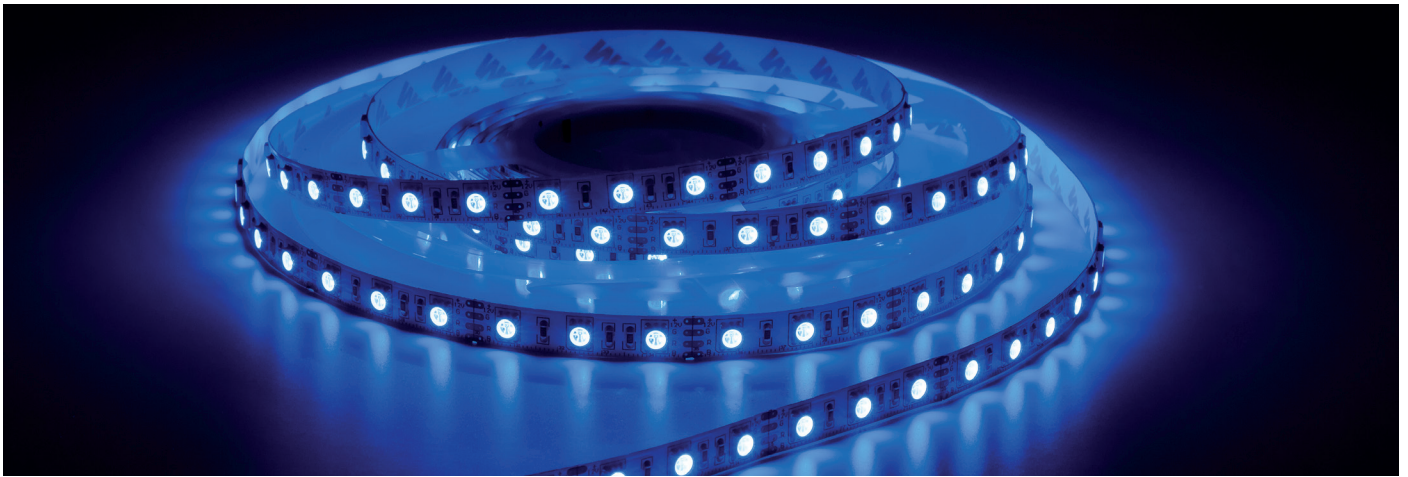


Havana Ribbon 5050 - 30

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852101	30	SMD5050	295 lm	RGB	 12 VDC	7.2 W	5 m	100 mm	10 mm	IP20
A0852102	60	SMD5050	590 lm	RGB	 12 VDC	14.4 W	5 m	50 mm	10 mm	IP20

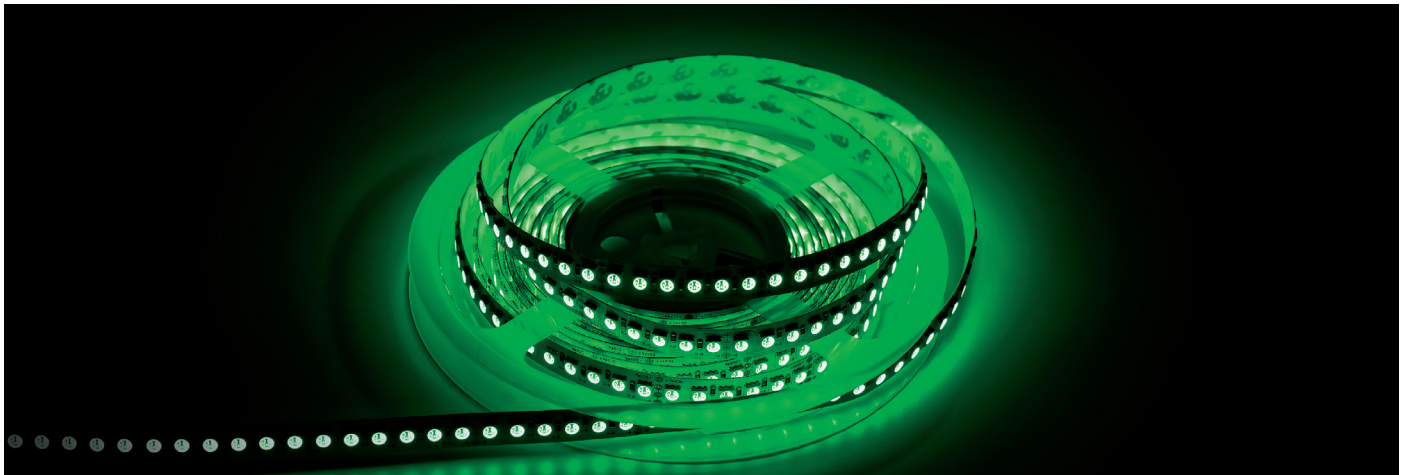






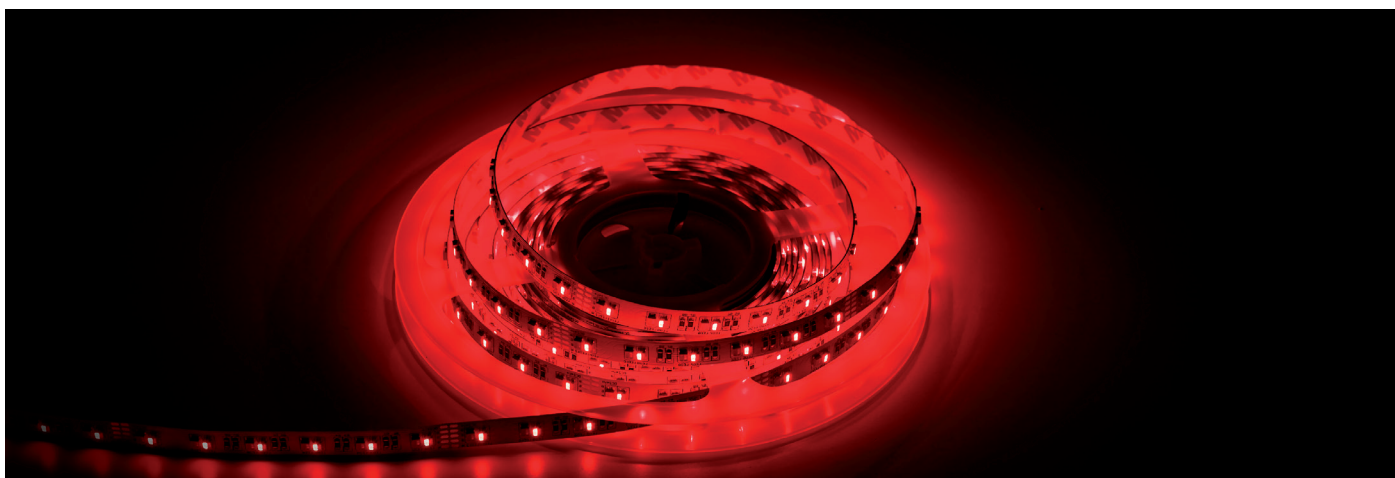
Havana Ribbon 5050 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852003	120	SMD5050	1180 lm	RGB	 24 VDC	28.8 W	5 m	50 mm	12 mm	IP20




Havana Ribbon 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852017	60	SMD5050	850 lm	RGBW - 2200 K 	82	24 VDC	19.2 W	5 m	100 mm	12 mm	IP20
A0852018	60	SMD5050	860 lm	RGBW - 2400 K 	82	24 VDC	19.2 W	5 m	100 mm	12 mm	IP20
A0852019	60	SMD5050	820 lm	RGBW - 2700 K 	82	24 VDC	19.2 W	5 m	100 mm	12 mm	IP20
A0852006	60	SMD5050	874 lm	RGBW - 3000 K 	82	24 VDC	19.2 W	5 m	100 mm	12 mm	IP20
A0852007	60	SMD5050	996 lm	RGBW - 6000 K 	82	24 VDC	19.2 W	5 m	100 mm	12 mm	IP20








Havana Ribbon 5050 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852028	120	SMD3527	935 lm	RGBW - 2400 K 	82	24 VDC	19.2 W	5 m	100 mm	10 mm	IP20

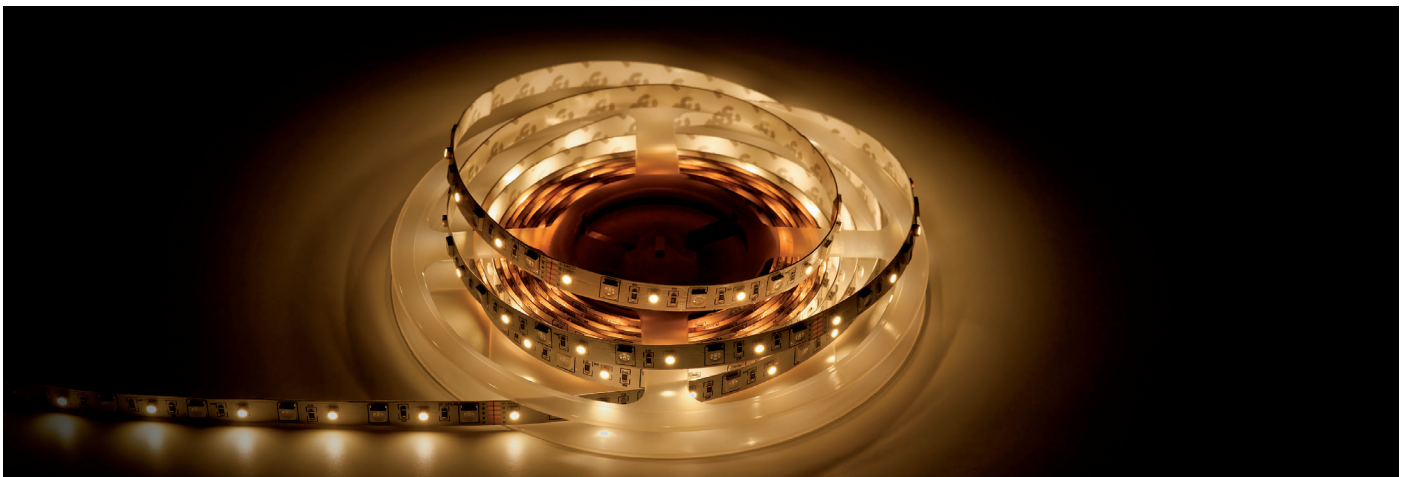


Havana Ribbon 5050+3528 - 72

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852024	72	SMD5050+3528	567 lm	RGBW - 2200 K 	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP20
A0852025	72	SMD5050+3528	578 lm	RGBW - 2400 K 	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP20
A0852026	72	SMD5050+3528	591 lm	RGBW - 2700 K 	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP20
A0852004	72	SMD5050+3528	520 lm	RGBW - 3000 K 	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP20
A0852005	72	SMD5050+3528	567 lm	RGBW - 6000 K 	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP20




Havana Ribbon RGBW 5 in 1

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852010	60	5in1	1280 lm	WW / CW / RGB - 2400 K / 6000 K 	90	24 VDC	24 W	5 m	100 mm	12 mm	IP20

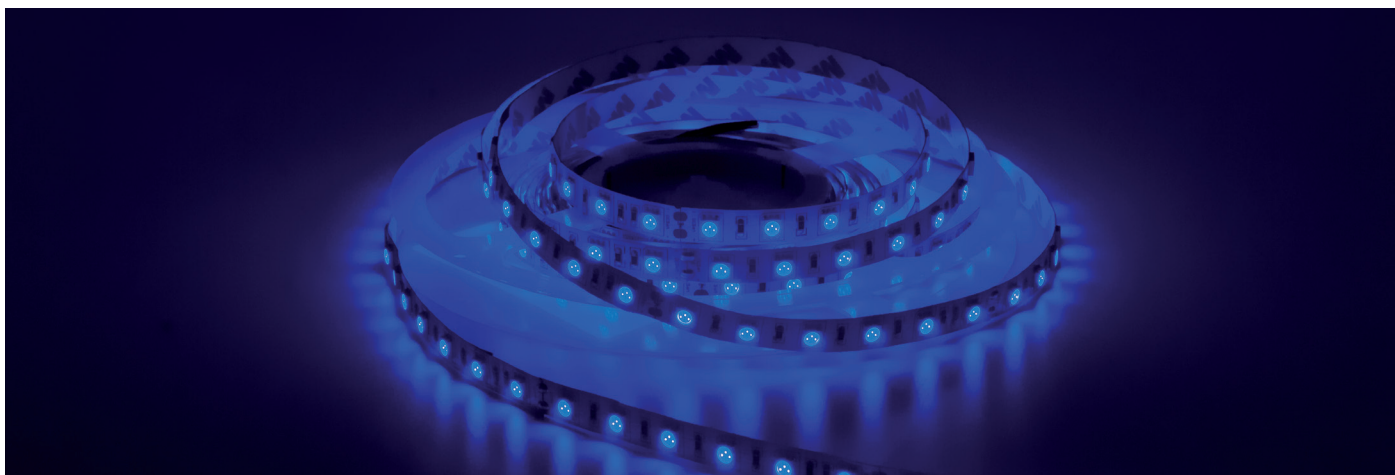


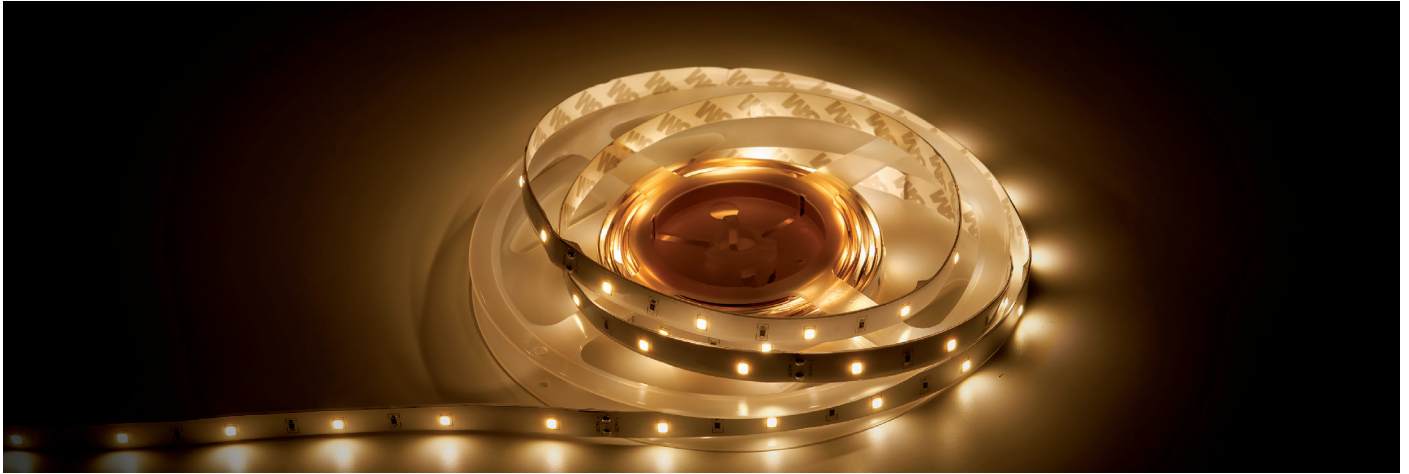
Havana Ribbon UV 3528 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852035	60	SMD3528	60 lm	UV	 24 VDC	4.8 W	5 m	100 mm	8 mm	IP20



Havana Ribbon UV 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852008	60	SMD5050	300 lm	UV	 24 VDC	14.4 W	5 m	100 mm	10 mm	IP20



Havana Dropper 2835 - 30

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856527	30	SMD2835	620 lm	WW - 2400 K	85	24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP62
A0856528	30	SMD2835	610 lm	WW - 2700 K	85	24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP62
A0856529	30	SMD2835	620 lm	WW - 3000 K	85	24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP62
A0856530	30	SMD2835	630 lm	NW - 4000 K	85	24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP62
A0856531	30	SMD2835	630 lm	CW - 6000 K	85	24 VDC	7.2 W	5 m	166.7 mm	10 mm	IP62



Havana Dropper 2835 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856532	60	SMD2835	1200 lm	WW - 2400 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP62
A0856533	60	SMD2835	1230 lm	WW - 2700 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP62
A0856534	60	SMD2835	1250 lm	WW - 3000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP62
A0856535	60	SMD2835	1280 lm	NW - 4000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP62
A0856536	60	SMD2835	1324 lm	CW - 6000 K	85	24 VDC	14.4 W	5 m	100 mm	10 mm	IP62



Havana Dropper 2835 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856537	120	SMD2835	2361 lm	WW - 2400 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP62
A0856538	120	SMD2835	2400 lm	WW - 2700 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP62
A0856539	120	SMD2835	2500 lm	WW - 3000 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP62
A0856540	120	SMD2835	2580 lm	NW - 4000 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP62
A0856541	120	SMD2835	2650 lm	CW - 6000 K	85	24 VDC	28.8 W	5 m	50 mm	10 mm	IP62



Havana Dropper 2835 - 240


Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856542	240	SMD2835	4723 lm	WW - 2400 K	85	24 VDC	57.6 W	5 m	25 mm	12 mm	IP62
A0856543	240	SMD2835	4900 lm	WW - 2700 K	85	24 VDC	57.6 W	5 m	25 mm	12 mm	IP62
A0856544	240	SMD2835	5000 lm	WW - 3000 K	85	24 VDC	57.6 W	5 m	25 mm	12 mm	IP62
A0856545	240	SMD2835	5150 lm	NW - 4000 K	85	24 VDC	57.6 W	5 m	25 mm	12 mm	IP62
A0856546	240	SMD2835	5300 lm	CW - 6000 K	85	24 VDC	57.6 W	5 m	25 mm	12 mm	IP62

LED Strips



Havana Dropper 2835 - 60 - 90 CRI

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856420	60	SMD2835	290 lm	WW - 2400 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP62
A0856421	60	SMD2835	310 lm	WW - 2700 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP62
A0856422	60	SMD2835	330 lm	WW - 3000 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP62
A0856423	60	SMD2835	340 lm	NW - 4000 K	90	24 VDC	4.8 W	5 m	100 mm	8 mm	IP62

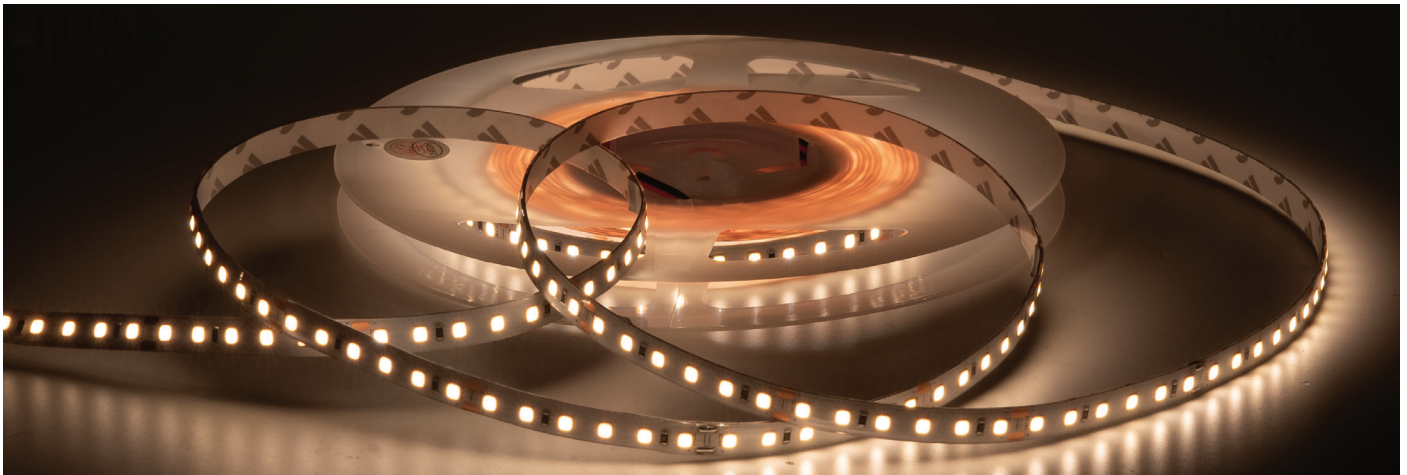

Havana Dropper 2835 - 120 - 90 CRI

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856424	120	SMD2835	530 lm	WW - 2400 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856425	120	SMD2835	560 lm	WW - 2700 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856426	120	SMD2835	660 lm	WW - 3000 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856427	120	SMD2835	700 lm	NW - 4000 K	90	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62




Havana Dropper 3528 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856567	120	SMD3528	780 lm	WW - 2400 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856568	120	SMD3528	800 lm	WW - 2700 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856569	120	SMD3528	820 lm	WW - 3000 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856570	120	SMD3528	830 lm	NW - 4000 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62
A0856571	120	SMD3528	870 lm	CW - 6000 K	85	24 VDC	9.6 W	5 m	50 mm	8 mm	IP62



Havana Rigid 5050 - 72


Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Height	IP rating
A0866705	72	SMD5050	965 lm	WW - 3000 K	80	24 VDC	17.2 W	1 m	7 mm	IP65
A0866706	72	SMD5050	1115 lm	CW - 6000 K	80	24 VDC	17.28 W	1 m	7 mm	IP65

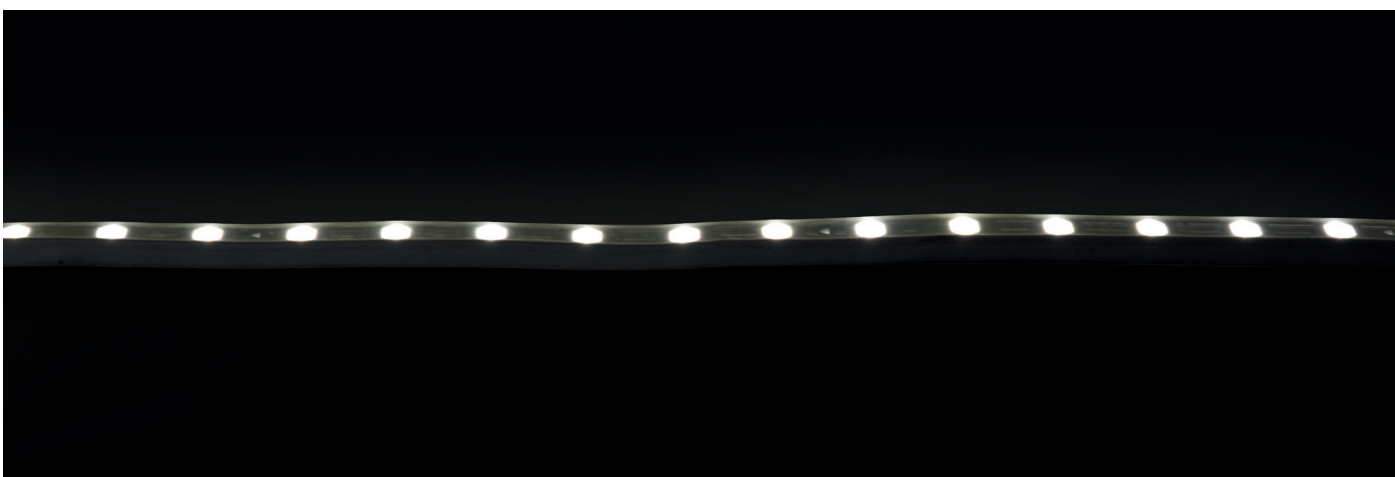

Pensacola 24

For outdoor use

Product code	LED Qty/m	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0854100	24	1020 lm	WW - 2700 K	90	24 VDC	16 W	10 m	250 mm	23 mm	IP65

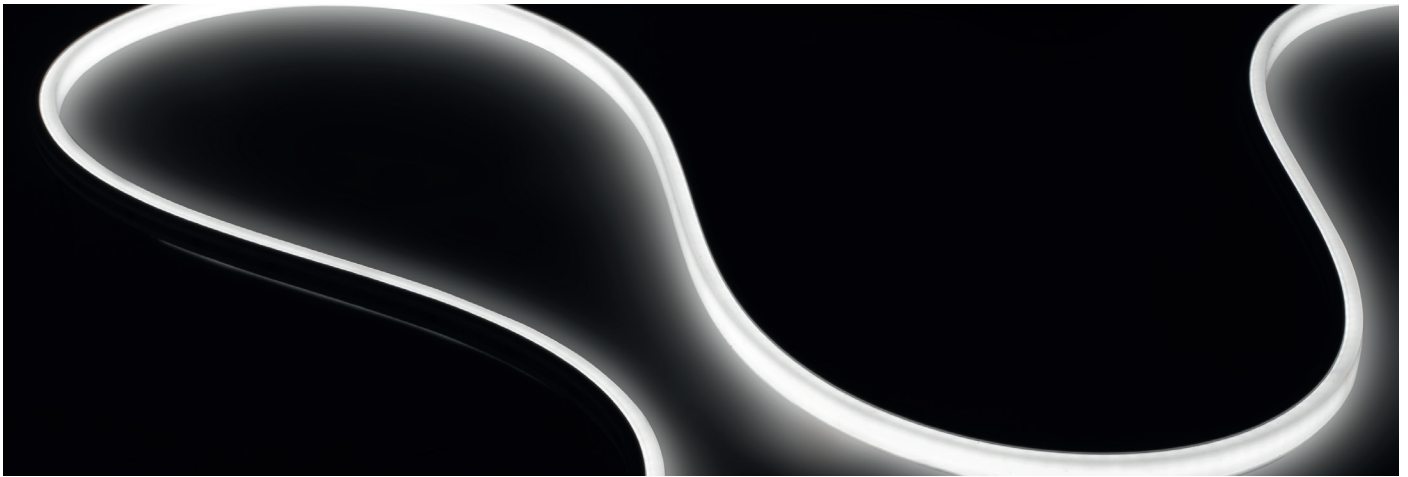

Havana Neon 410 - 144

Product code	LED Qty/m	Lumen output/m	LED type	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	Height	IP rating
A0853100	144	130 lm	SMD2835	WW - 2700 K	90	24 VDC	10 W	5 m	42 mm	4 mm	10 mm	IP65
A0853101	144	150 lm	SMD2835	WW - 3000 K	90	24 VDC	10 W	5 m	42 mm	4 mm	10 mm	IP65
A0853102	144	160 lm	SMD2835	NW - 4000 K	90	24 VDC	10 W	5 m	42 mm	4 mm	10 mm	IP65



Havana Neon 1010 - 180

Product code	LED Qty/m	Lumen output/m	LED Type	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	Height	IP rating
A0853300	180	1000 lm	SMD2835	WW - 2700 K	90	24 VDC	14 W	5 m	33.3 mm	10 mm	10 mm	IP65
A0853301	180	1030 lm	SMD2835	WW - 3000 K	90	24 VDC	14 W	5 m	33.3 mm	10 mm	10 mm	IP65
A0853302	180	1060 lm	SMD2835	NW - 4000 K	90	24 VDC	14 W	5 m	33.3 mm	10 mm	10 mm	IP65



Havana Neon 1018 - 120

Product code	LED Qty/m	Lumen output/m	LED Type	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	Height	IP rating
A0853200	120	450 lm	SMD2835	WW - 2700 K	90	24 VDC	14 W	5 m	50 mm	10 mm	18 mm	IP65
A0853201	120	460 lm	SMD2835	WW - 3000 K	90	24 VDC	14 W	5 m	50 mm	10 mm	18 mm	IP65
A0853202	120	470 lm	SMD2835	NW - 4000 K	90	24 VDC	14 W	5 m	50 mm	10 mm	18 mm	IP67



Havana Neon 1018 - 60


Product code	LED Qty/m	Lumen output/m	LED Type	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	Height	IP rating
A0853210	60	200 lm	SMD5050	RGB	24 VDC	14 W	5 m	100 mm	10 mm	18 mm	IP67

LED Strips





Havana Neon RGB Pixel

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	Height	IP Rating
A0852150	60	SMD5050	140 lm	RGB	 24 VDC	14.4 W	5 m	100 mm	10 mm	18 mm	IP67

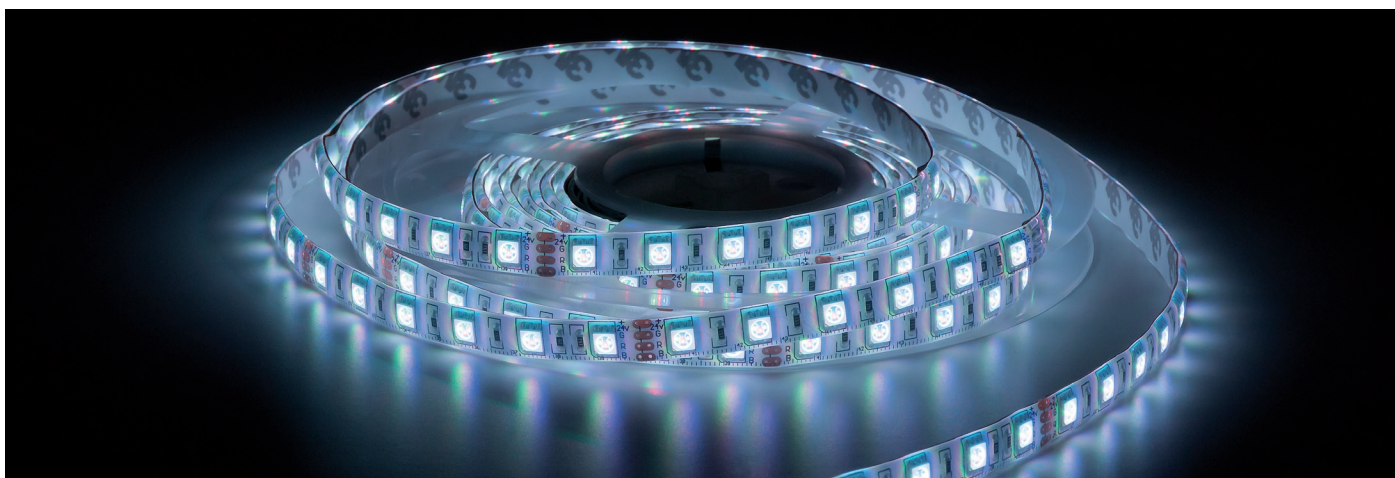

Havana Dropper 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856553	60	SMD5050	590 lm	RGB	 24 VDC	14.4 W	5 m	100 mm	10 mm	IP62




Havana Rigid RGB 5050 - 72

Product code	LED Qty/m	LED Type	Lumen output/m	Colour	Power Supply	Power/1 m	Length(m)	Height	IP rating
A0866704	72	SMD5050	612 lm	RGB	 24 VDC	17.2 W	1 m	7 mm	IP65




Havana Dropper 5050+3528 - 72

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856400	72	SMD5050+3528	470 lm	RGBW - 2400 K	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP62
A0856401	72	SMD5050+3528	500 lm	RGBW - 2700 K	82	24 VDC	11.6 W	5 m	166.7 mm	12 mm	IP62
A0856402	72	SMD5050+3528	510 lm	RGBW - 3000 K	82	24 VDC	11.6 W	5 m	166.7 mm	10 mm	IP62

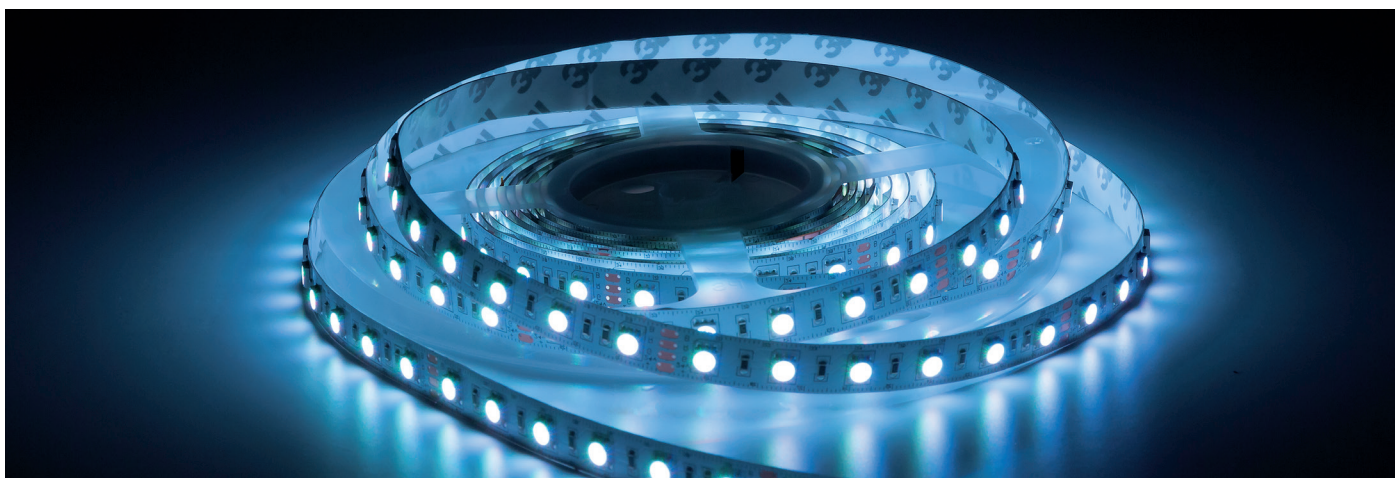


Havana Dropper 4-in-1 5050 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856411	60	SMD5050	660 lm	RGBW - 2700 K	24 VDC	19.2 W	5 m	100 mm	12 mm	IP62

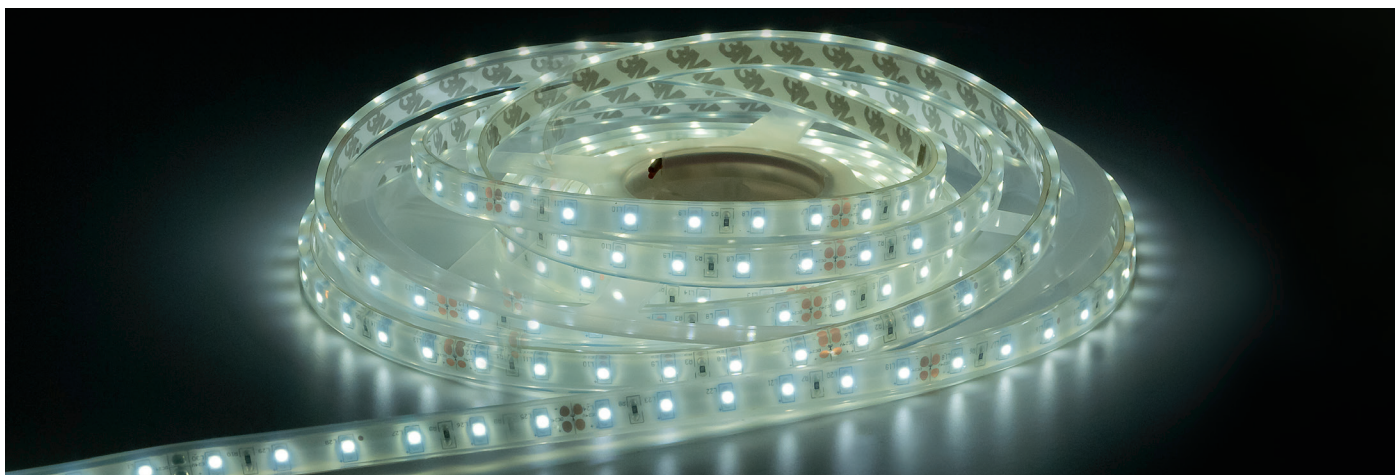

Havana Jade 3528 - 60

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856803	60	SMD3528	390 lm	WW - 3000 K	85	24 VDC	60 W	5 m	100 mm	10 mm	IP68
A0856806	60	SMD3528	408 lm	CW - 6000 K	85	24 VDC	60 W	5 m	100 mm	10 mm	IP68

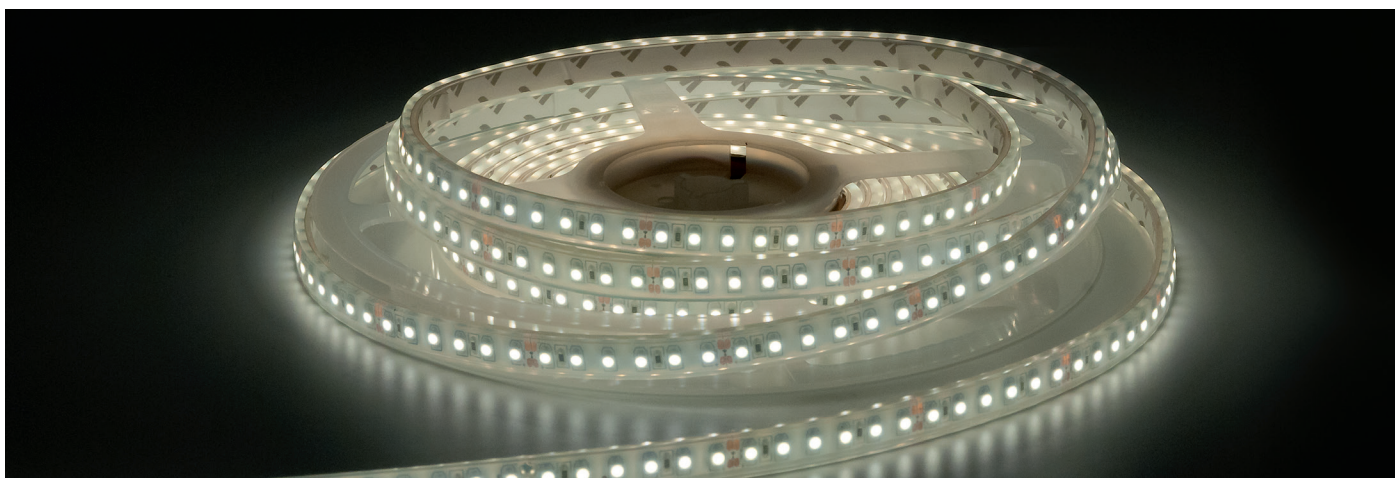


Havana Jade 3528 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856812	120	SMD3528	750 lm	WW - 2700 K	85	24 VDC	9.6 W	5 m	50 mm	10 mm	IP68
A0856813	120	SMD3528	780 lm	WW - 3000 K	85	24 VDC	9.6 W	5 m	50 mm	10 mm	IP68
A0856817	120	SMD3528	790 lm	NW - 4000 K	85	24 VDC	9.6 W	5 m	50 mm	10 mm	IP68
A0856816	120	SMD3528	810 lm	CW - 6000 K	85	24 VDC	9.6 W	5 m	50 mm	10 mm	IP68



Havana Jade 3528 - 240

Product code	LED Qty/m	LED Type	Lumen output/m	CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0856823	240	SMD3528	1632 lm	WW - 3000 K	85	24 VDC	19.2 W	5 m	50 mm	18 mm	IP68
A0856818	240	SMD3528	1625 lm	NW - 4000 K	85	24 VDC	19.2 W	5 m	50 mm	18 mm	IP68
A0856826	240	SMD3528	1632 lm	CW - 6000 K	85	24 VDC	19.2 W	5 m	50 mm	18 mm	IP68

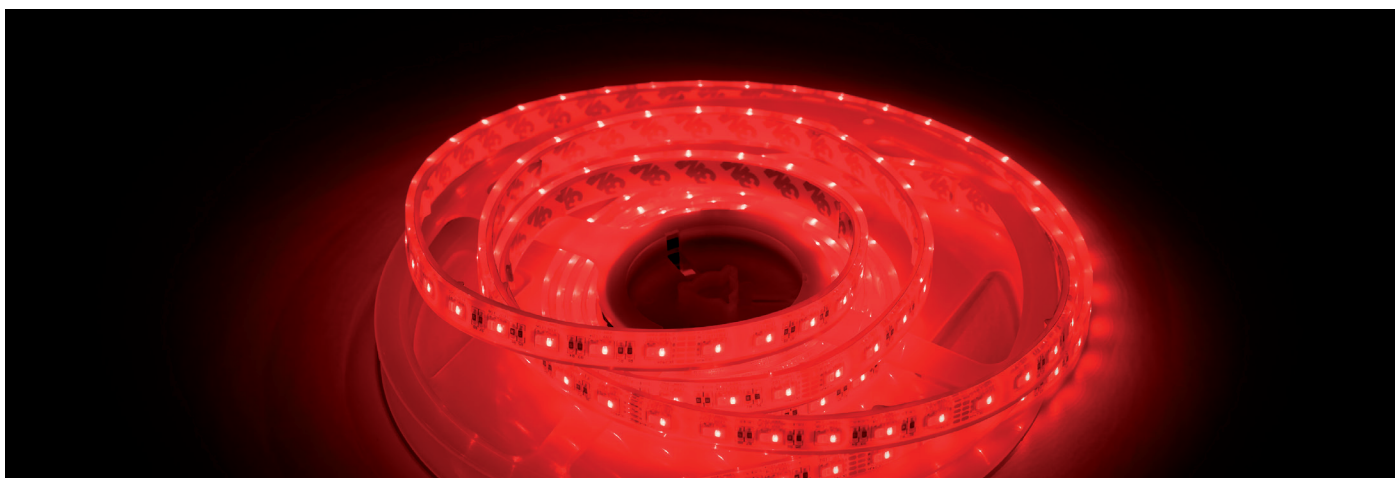

Havana Jade RGBW 3527 - 120

Product code	LED Qty/m	LED Type	Lumen output/m	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Cutting Length	Width	IP rating
A0852127	120	SMD3527	789 lm	RGBW	82	24 VDC	19.2 W	5 m	100 mm	12.5 mm	IP68
A0852128	120	SMD3527	789 lm	RGBW	82	24 VDC	19.2 W	5 m	100 mm	12.5 mm	IP68
A0852129	120	SMD3527	798 lm	RGBW	82	24 VDC	19.2 W	5 m	100 mm	12.5 mm	IP68

LED Strips



Cayenne 70

Product code	Lumen output/m	LED Type	CCT	CRI	Power Supply	Power/1 m	Length(m)	Width	IP rating
A0866790	1400 lm	SMD2835	CW - 10000 K	75	12 VDC	41 W	0.05 m	0.15 mm	IP65



Cayenne RGB

Product code	Lumen output/m	LED Type	Colour	Power Supply	Power/1 m	Length(m)	Width	IP rating
A0866786	33 lm	SMD5050	RGB	12 VDC	38 W	0.085 m	17.5 mm	IP65



Cayenne RGBW

Product code	Lumen output/m	LED Type	Colour / CCT	CRI	Power Supply	Power/1 m	Length(m)	Width	IP rating
A0866787	53 lm	SMD5050	RGBW - 6000 K	75	12 VDC	5 W	0.085 m	17.5 mm	IP65



Profiles

An extensive range of products for covering all in and out-door situations in professional environments.

View all the profiles on our website.



ARTECTA

