

SUBMIX



Analog/digital mixer with an active filter

This 6-channel mixer allows you to independently control your subwoofer

ref 9573

- + Adjustable active filter for basses settings
- + 1 USB input/output to play files from a computer
- + 15 inputs and 2 outputs
- + Mountable in 19" wide racks

304




THE SUBMIX IS A PERFECT TOOL TO OVERCOME FIELD CONSTRAINTS

Well thought-out layout : It features a rear terminal with multiple outputs and removable faders

High fidelity rendering : The components have been selected for their response time and reliability

Beautiful design : A high-quality finishing and materials with pleasant colours make the difference

REAR PANEL

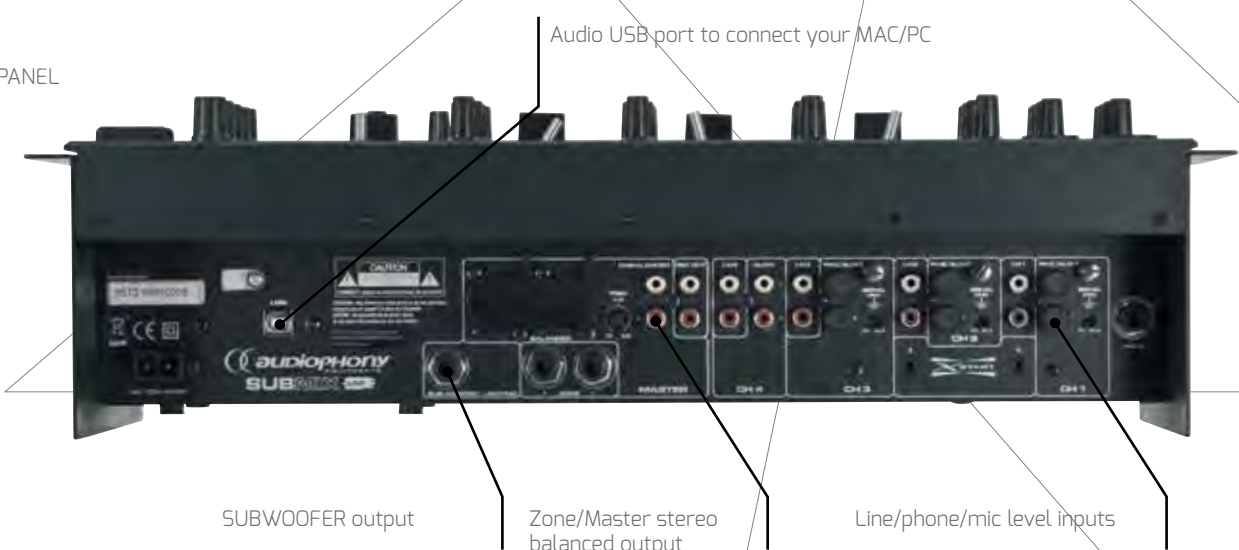

6 simultaneous sources for a total of 15 inputs (phono, line, Aux or USB) and 3 mic inputs. The SUBWOOFER output works separately



The SUBMIX features a USB audio port PC and Mac compatible.

TECHNICAL SPECIFICATIONS

- USB port on channel 3 allowing you to read and play audio files
- The console is automatically detected as a sound card by your computer (PC/Mac), without installing any driver
- SUB output with a frequency-adjustable active filter (40-200Hz) and 1 level
- 3 microphones front outputs, including 2 XLR/Jack combo outputs
- ON/OFF and talk-over functions via channel 1
- 3 RCA phone inputs
- 4 RCA line inputs
- 4 RCA auxiliary inputs
- 3-band equalizer for each channel
- 3-band equalizer for each micro channel
- Gain control for each channel
- Very low-leakage current assignable cross-fader
- Activate the Xstart function and use the cross-fader to play from the cued up point
- Unbalanced and balanced Master output
- Unbalanced Zone output
- Sensitivity output settings
- Master output Mono/Stereo modes
- LEDs view meter indicating the Master output and channels current state
- LED input indicator for each channel
- Power supply : 100 -240 V - 50 Hz
- Dimensions : 482 x 177 x 147 mm - 19" - 4 units
- Weight : 4.4 kg