


Product Detail Page

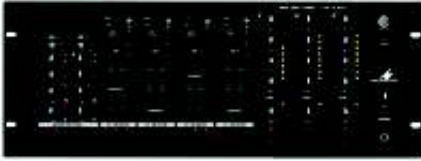

MPX-4PA

Number: 20.2070

3-zone mixer

- 3 zones with routing facility of all input channels as desired
- XLR and RCA zone outputs
- 6 input channels (4 stereo ways, 2 microphone ways)
- Both microphone ways can only be routed together
- Recessed gain control for each input channel
- Microphone ways, each with 2-way tone control, talkover and PAD switch
- Switchable stereo channels: 2 x phono/line and 2 x line/line
- Zone outputs, each with 3-way equalizer, LED level display of the stereo master, balance control, pre-fader listening (PFL) and mono/stereo selector switch
- Adjustable headphone output with pre-fader listening (PFL) to the stereo input channels and the zone outputs
- Connection for gooseneck light GNL-200, GNL-204 or GNL-205

Technical Facts

Mic input	1.5mV
Phono input	3mV
CD input	150mV
Line input	150mV
Master output	1V/600Ω
Record output	-
Headphones	? 8Ω
Frequency range	20-20,000Hz
THD	0.1%
S/N ratio	61dB, unweighted
Equalizer, bass	+12dB, -12dB/50Hz
Equalizer, midrange	+12dB, -12dB/1kHz
Equalizer, treble	+12dB, -12dB/10kHz
Talkover	-16dB
Gooseneck light	12V/5W, BNC
Power supply	230V~/50Hz/20VA
Admiss. ambient temp.	0-40 °C
Dimensions	482x177x105mm, 4RS
Weight	3.75kg