

ELIMINATOR
LIGHTING

ACCU-STAND
PROFESSIONAL SUPPORT SYSTEMS



ELEVATE
THE EXPERIENCE

EU CATALOGUE V1

STRYKER MAX **NEW**

Code: 1900000046 GTIN/EAN: 810087372941

ELIMINATOR
LIGHTING



Light Source:

- 6 x 40-Watt Quad (RGBW) LEDs
- LED Ring: 60 x .5-Watt RGB LEDs

Features:

- Motorized Zoom: 4 ~ 55-degrees
- Create eye candy effects with LED Ring
- Variable White Color Temperatures: 2800K – 8500K
- Built-in Color Macros & Effects
- 0-100% smooth dimming
- Variable speed strobe effect
- Fast, precise, pan & tilt movements

Control:

- DMX Channel Modes: 18 or 23 channels
- Operational Modes: DMX512 / Primary-Secondary / Auto Run / Sound / RDM
- OLED Menu Display

Connections:

- 3-pin DMX In/Out
- Locking Power Input

Pan/Tilt:

- Pan: 540°
- Tilt: 190°
- 16-bit Fine Pan
- 16-bit Fine Tilt

Electrical:

- Multi-voltage operation: 100-240V, 50/60Hz
- Maximum power draw: 260-Watts

Dimensions & Weight:

- Dimensions (LxWxH): 367.5x292x180mm
- Weight: 7.5 kg

Approvals:

- IP20

STRYKER SPOT **NEW**

Code: 1900000045 GTIN/EAN: 810087372934

ELIMINATOR
LIGHTING



Light Source:

- 150-Watt high power cool white LED
- 50,000 hours average life expectancy

Features:

- Motorized Focus
- Motorized zoom (9° - 14°)
- 0-100% smooth dimming
- Variable speed strobe effect (1Hz - 20Hz)
- Fast, precise, pan & tilt movements

Color Wheel:

- 7 dichroic colors + open white

GOBO Wheels:

- Wheel 1: 8 static GOBOS + Open
- Wheel 2: 6 replaceable rotating GOBOS + Open

Prisms:

- Prism 1: rotatable (bi-directional) 6-facet circular
- Prism 2: rotatable (bi-directional) 5-facet linear

Control:

- Operating modes: DMX512 / Primary-Secondary / Auto Run / Sound Active
- DMX channel modes: 18 / 13 / 11

- RDM (Remote Device Management)
- OLED Menu Display

Connections:

- Data in/out: 3-pin DMX
- Locking Power Input

Pan/Tilt:

- Pan: 540°
- Tilt: 210°
- 16-bit Fine Pan
- 16-bit Fine Tilt

Electrical:

- Multi-voltage operation: 100-240V, 50/60Hz
- Maximum power draw: 180-Watts

Dimensions & Weight:

- Dimensions (LxWxH): 417mm x 292mm x 180mm
- Weight: 8.5 kg

Approvals / IP Rating:

- IP20

All specifications subject to change without notice

www.adj.eu/eliminatorlighting



Light Source:

- 100W LED Engine
- 6-Degree Beam Angle

Features:

- Full color function display with 4 buttons
- Fast, precise, pan & tilt movements
- Primary / Secondary stand-alone mode
- Motorized Focus
- Frost Filter (50-Degree Wash Effect)

Color & Gobo Wheels:

- 13 colors + open
- Separate 6-Color flag for multi-color effects
- Metal wheel with 11 Gobos + open (2 are beam reducers)
- Gobo Shake Effect

Prism Wheel:

- 8-facet rotating circular prism
- 16-facet rotating circular prism
- Prism layering

Control:

- 2 DMX channel modes: 16 & 19 channels
- Protocols: DMX-512, RDM, Auto and Primary/

Secondary control modes

- Electronic Dimmer: 0- 100 %
- Variable Strobe: 0-20HZ

Connections:

- DMX Data In/Out: 3-pin & 5-pin connections
- Power In: Blue Locking indoor power connection
- Power Out: White Locking indoor power connection

Pan/Tilt:

- Pan/Tilt: 540-degrees / 270-degrees
- 16-bit Fine Pan
- 16-bit Fine Tilt

Electrical:

- Multi-voltage operation: AC 100-24V, 50/60Hz
- Maximum Power Consumption: 150W
- Power daisy chain: 3 units @230V

Dimensions & Weight:

- Dimensions (LxWxH): 292.1 x 302.3 x 464.0mm
- Weight: 12.8 kg

What's Included:

- Locking power cord & Omega bracket



Light Source:

- 19x 12W RGBW (4-IN-1) LEDs
- 50,000 Hours Life

Features:

- Fast, precise, pan & tilt movements
- Three zone DMX control mode
- Primary / Secondary stand alone mode
- Motorized Zoom: 6 ~ 50°
- Linear CT DMX control channel. 3200K-10000K
- Up to 18 Strobe flashes per second

Connections:

- DMX Data In/Out: 3-pin XLR
- Power In: Blue Locking indoor power connection
- Power Out: White Locking indoor power connection

Control:

- Color LCD display with touch buttons
- 2 DMX channel modes: 13 & 23 channels
- Protocols: DMX-512, Auto and Sound control modes
- With Wired Digital Communication Network

Pan/Tilt:

- Pan/Tilt: 540-degrees / 210-degrees
- 16-bit Fine Pan
- 16-bit Fine Tilt

Electrical:

- Multi-voltage operation: 100-240V, 50/60Hz
- Maximum power draw: 300W

Dimensions & Weight:

- Dimensions (LxWxH): 222mm x 324mm x 399mm
- Weight: 8.2 kg

Technical:

- Operating environment: Indoor -15° ~ 40°C
- Fan Cooled
- Housing: Black Composite Plastic

Approval / IP Rating

- IP20



STINGER SPOT 30

Code: 1900000033 GTIN/EAN: 810087370534

ELIMINATOR
LIGHTING



Source:

- Light Source: 30W white LED
- Beam angle: 13-Degrees

Control:

- 2 DMX Channel Modes: 4 or 12-Channels
- Movement: Pan 540-Degrees / Tilt 190-Degrees + Pan/Tilt Inversion mode
- Control modes: DMX-512, Primary/Secondary, Auto, Sound Active
- 4-button DMX display on rear panel
- 8 internal Programs
- Manual Focus
- Dimming 0-100%
- Strobe Effects
- Fan cooled

Colors:

- Color wheel: 7 color + open, rainbow - flow effect

Gobos:

- GOBO wheel: 7 GOBOs + open - flow effect, gobo shake

Connections:

- Data linkable via 3-pin DMX sockets
- IEC power input

Electrical:

- Multi-voltage Operation: AC 100-240V, 50/60Hz
- Max Power Consumption: 42W

Dimensions & Weight:

- Dimensions (LxWxH): 271x176x 148mm
- Weight: 3 kg

What's included:

- Omega Bracket
- IEC power cable

Accessories:

- F4 Par Bag sold separately

DOTZ TPAR SYS PLUS

Code: 1900000043 GTIN/EAN: 810087372002

NEW

ELIMINATOR
LIGHTING



SEMI-HARD CASE INCLUDED



RF REMOTE CONTROL



FOOT SWITCH CONTROLLER INCLUDED

System includes:

- 4x COB LED Par Wash Fixtures
- 1x Foot Controller
- 1x Lighting Stand
- 1x RF Remote Control
- 1x Stand Bag
- 1x Semi-Hard case for lighting system

Source:

- Light Source: Each fixture has 1x 30-Watt TRI Color COB LEDs
- LUX @ 3M: 1345
- Long Life LEDs (Approx. 50,000 hrs.)
- Beam angle: 90-degree

Features:

- COB Technology produces powerful, smooth RGB color mixing with rich palettes of color and no color shadows
- Smooth RGB Color Mixing (fast or slow color change operation)
- RF Remote Control control up to 25 meters
- Refresh Rate: 3.6KHz

Control:

- Digital DMX Display with 4-button menu for easy navigation
- 4 Operational modes: Sound Active, Auto Run, Built-In Programs, & DMX-512
- Stand Alone or Primary/Secondary Configuration
- Pixel Flip option changes pixel orientation
- 14 Built-in Programs
- 5 DMX Channel modes: 3, 5, 9, 12 and 18 channels
- Strobe & Pulse LED Effect
- Electronic Dimming: 0-100%
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Foot Controller Features: Mode, Black Out and Program Change

Connections:

- 3-Pin DMX In/Out
- IEC In and IEC out to daisy chain power
- 2x power plugs on rear to plug in other lighting fixtures (230V = Shuko)
- 5-pin DMX In to connect foot controller

Electrical:

- Multi-voltage operation: AC 100V-240V 50/60Hz (IEC Input)
- Power Draw: 144W Max (entire system)

Dimensions & Weight:

- Dimensions (LxWxH): 1000 x 320 x 82mm
- Weight: 16 kg (Fixture Bar, Stand & Controller)
- Maximum stand height: 275cm

What's Included:

- Includes 25-degree beam angle lens kit
- Includes hardware to mount two lighting fixtures on top of the light bar
- 5-pin DMX cable to connect the foot controller to rear of the light bar
- Power Cord



Source:

- 4 x 20-Watt, 6-IN-1 Hex (RGBLA+UV) LEDs (50,000 hrs.)
- CRI: >90
- Lumens: 1100
- Beam Angle: 17° (native); 20° (with frost filter)

Effects:

- White Color Temperature Control (2300K – 9900K)
- 15 White Color Temperature Presets
- 63 built-in Color Macros
- 13 built-in programs
- Flicker Free
- Electronic Dimming: 0-100%
- 6 Dimmer Curve Modes
- Color strobe effect

Control:

- 7 DMX Channel modes: 6, 8, 9, 12, 14, 15 and 17 channel modes
- 5 Operational modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGBLA + UV Dimmer Mode, Static Color Mode (63 Colors), and DMX Controlled

- 4-button with OLED display menu for easy navigation
- Stand Alone or Primary/Secondary Configuration
- DMX-512 protocol

Connections:

- 3-pin DMX Inputs/Outputs
- IEC AC input and output on the side of the fixture to daisy chain the power (link up to 20 fixtures @120V, up to 40 fixtures @230V)
- With Wired Digital Communication Network

Electrical:


- Multi-voltage operation: AC 100V-240V 50/60Hz
- Power Draw: 24W Max

Dimensions / Weight:

- Dimensions (LxWxH): 261x260x110mm
- Weight: 1.87 kg

Included Items:

- Includes the ADJ UC IR24 wireless IR remote
- IEC Power Cord
- 20° Frost Filter
- Safety cable
- Scissor yoke

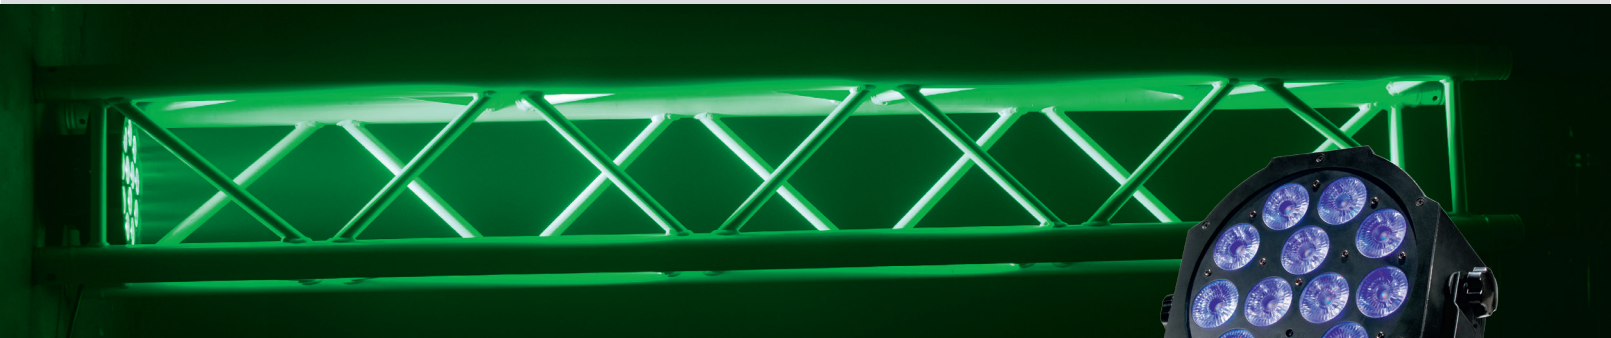

Source:

- 12 x 4W Quad (RGB+UV 4-IN-1) LEDs
- Light output: 3,520 LUX @ 2M; 820 LUX @ 4M (25-degree beam)

Features:

- Smooth RGB Color Mixing (fast or slow color change operation) with no RGB+UV shadows
- Power & DMX Ins/Outs are intelligently designed to sit sideways so the unit can be set flat on the ground
- Flicker Free

Control:

- DMX-512 protocol
- 5 DMX Channel Modes: 4/5/6/9/10 Channels
- 5 Operational modes: RGB+UV Dimmer Mode, Sound Active Mode, Auto Run Mode (16 Color Change Programs, 16 Color Fade Programs, & Color Change & Fade Combination), Static Color Mode, & DMX Controlled
- Stand Alone or Primary/Secondary Configuration
- 4-Button DMX LED Display
- 64 built-in Color Macros
- Refresh Rate: 504Hz
- Electronic Dimming: 0-100%

- LED Pulse and strobe effect

Connections:

- Linkable via 3-pin XLR cable
- Power: IEC In/Out to daisy chain power (Link up to 12 Mega 64 Profile Plus fixtures)
- With Wired Digital Communication Network

Electrical:

- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Power Draw: 54W Max
- Fuse: 2Amp

Dimensions & Weight:

- Dimensions (LxWxH): 261 x 260 x 110mm
- Weight: 2.1 kg

What's Included:

- Includes scissor yoke to hang on truss, mount on a wall or set on the ground
- Power cable length: 1.8 meter (IEC)

Accessories:

- Compatible with LED RC2 wireless infrared remote control up to 10M (sold separately)



MEGA WASH 24 NEW

Code: 1900000047 GTIN/EAN: 810087372286

ELIMINATOR
LIGHTING



Source:

- 24 x 10-Watt, 6-IN-1 Hex (RGBWA+UV) LEDs
- Beam Angle: 25-degrees

Features:

- Vibrant Color Wash Effects
- Six Zones (4 LEDs per Zone) can each change color in 40 Channel DMX Mode
- Safety Loop
- Dual Fan Cooling
- Two Hanging Bracket locations: top or rear of fixture
- Electronic Dimming: 0-100%
- Variable Strobe Effect

Control:

- 4-button with OLED display menu for easy navigation
- 4 DMX Channel modes: 3, 6, 10, and 40 channel modes
- 4 Operational modes: DMX Control, Sound Active, Auto Mode or Primary/Secondary Mode

Connections:

- 3-pin DMX In/Out Sockets
- IEC AC input and output on the back of the fixture to daisy chain the power
- Two IR Remote Sensors (one in front and one on the rear)
- With Wired Digital Communication Network

Electrical:

- Multi-voltage operation: AC 100V-240V 50/60Hz
- Power Draw: 250W Max

Dimensions / Weight:


- Dimensions (LxWxH): 310mm x 226mm x 273mm
- Weight: 3.6 kg

Included Items:

- Includes wireless IR remote
- IEC Power Cord
- Mounting Bracket

IR Remote Features:

- On & Off Buttons
- Red, Green & Blue Color Buttons
- 9 Color Macro Buttons
- Auto, Sound, Flash & Speed with + & - buttons

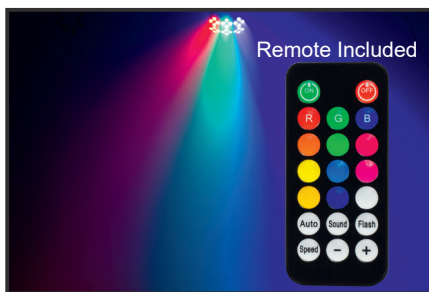

FROST FX BAR RGBW

Code: 1900000031 GTIN/EAN: 818651029956

ELIMINATOR
LIGHTING



Source:

- 1-meter LED linear wash fixture that chases colors and creates engaging effects
- Light sources: 14x 3W RGBW (4-IN-1 – Red, Green, Blue & White) LEDs + 84x 5050 RGB (3-IN-1) SMD LEDs
- 17-degree beam angle

Control:

- 4-button LED function display
- 8 DMX channel modes (3, 7, 11, 18, 102, 107 & 111-channel modes)
- 4 operation modes: DMX, Auto, Sound and Primary/Secondary
- With wired digital communication network
- 0-100% Electronic Dimming
- 64 built-in color macros
- 45 built-in shows

Connections:

- 3-pin DMX In/Out connections to link data
- Locking power In/Out connections to daisy chain power

Electrical:

- Max power: 55W
- Multi-voltage operation: AC 110-240V, 50/60Hz

Dimensions/Weight:

- Dimensions (LxWxH): 1000mm x 71mm x 125mm
- Weight: 3.3 Kg

Included:

- Adjustable Angle Hanging Bracket
- Power cable





Source:

- 1-meter LED linear wash fixture that chases colors and creates engaging effects
- Light sources: 14x 3W white LEDs + 84x 5050 RGB (3-IN-1) SMD LEDs
- 17-degree beam angle

Control:

- 4-button LED function display
- 9 DMX channel modes (3, 8, 14a, 14b, 17, 56, 60, 66 ad 69-channel modes)
- 4 operation modes: DMX, Auto, Sound and Primary/Secondary
- With wired digital communication network
- 0-100% Electronic Dimming
- 64 built-in color macros
- 45 built-in shows

Connections:

- 3-pin DMX In/Out connections to link data
- Locking power In/Out connections to daisy chain power

Electrical:


- Max power: 55W
- Multi-voltage operation: AC 110-240V, 50/60Hz

Dimensions/Weight:

- Dimensions (LxWxH): 1000mm x 71mm x 121.4mm
- Weight: 3 Kg

Included:

- Adjustable Angle Hanging Bracket
- Power cable

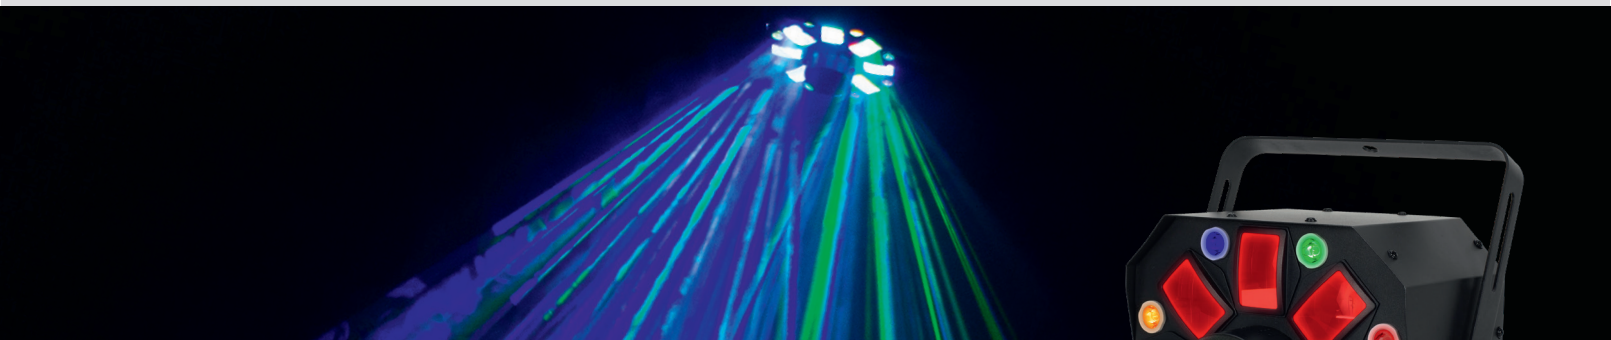

Source:

- 3-FX-IN-1 dance party lighting effect: LED Moonflower, Wash and laser effects
- Dozens of razor-sharp beams fill a dance floor, ceiling or wall
- Moonflower: 5 x 3W (RGBWY) 5-in-1 LEDs
- Wash: 8 x 3W (RGBY) Quad LEDs
- Laser: Red & Green laser diodes

Control:

- 4 control mode: DMX, Sound Active, Auto, Primary/Secondary
- 4-button LED display menu
- 9 DMX channels
- Electronic dimming: 0-100%

Connections:

- 3-pin DMX In/Out
- IEC AC In/Out connectors to daisy chain power
- Laser On/Off with safety key
- Safety eye on rear panel
- Built-in microphone with sensitivity potentiometer
- With wired digital communication network

Electrical:

- Power Draw: 40W max
- Multi-voltage operation: 100-240V, 50/60Hz

Dimensions/Weight:

- Dimensions: 300mm x 312mm x 226mm
- Weight: 3.7 kg

- Laser accession number: 2110902-000

Included:


- Power cable
- Hanging Bracket
- Laser safety key



FURIOUS FIVE RG

Code: 1900000039 GTIN/EAN: 818651028096

ELIMINATOR
LIGHTING

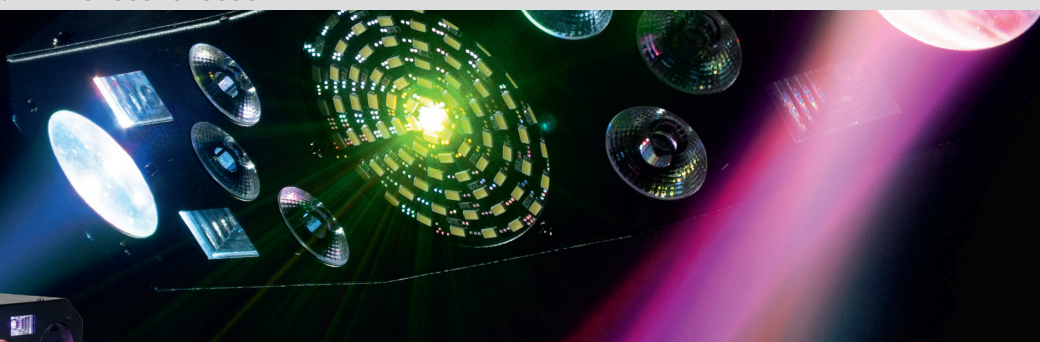

Features:

- 5 effects in 1 fixture
- Strobe: 81 SMD 5730 white LED
- Four (4) 3W UV CREE single color
- Six (6) 3W Quad (RGBW) LEDs
- Laser Diodes: Red = 100MW and Green = 70MW
- Moonflower effect: 5mm LED (16x Red, 12x Green, 12x Blue 12, 16x White)

Control:


- 4 operation modes: Automatic running, DMX, Sound Active and Primary/Secondary
- Sound controlled via built-in microphone
- 0-100% linear dimmer
- Power Consumption: 60W
- 2DMX Channel modes: 11 or 24 channels
- Voltage: AC110-240V 50/60Hz

Dimensions:

- Unit Dimensions (LxWxH): 457 x 178 x 165mm
- Weight: 3.6 kg

Certifications:

- Laser accession number: 2110902-000

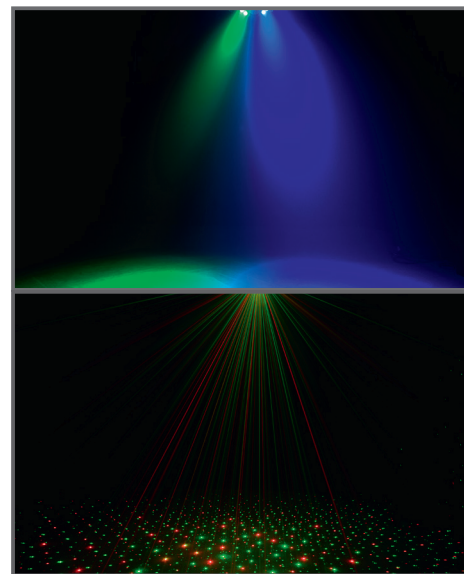


FURIOUS THREE RG UV

Code: 1900000044 GTIN/EAN: 810087371906

NEW

ELIMINATOR
LIGHTING

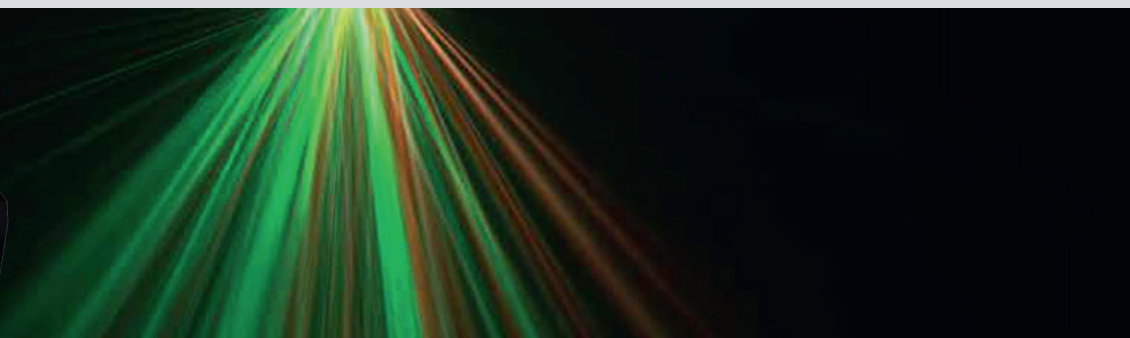

Source:

- 3-FX-IN-1 dance party lighting effect: LED Moonflower, UV-Wash and Laser Effects
- Dozens of razor-sharp beams fill a dance floor, ceiling or wall
- Moonflower: 5 x 3W (RGBWA) 5-in-1 LEDs
- Wash: 8 x 3W (UV) LEDs
- Laser: Red & Green laser diodes

Control:

- 4 control mode: DMX, Sound Active, Auto, Primary/Secondary
- 4-button LED display menu
- Multiple DMX Channels
- Electronic dimming: 0-100%

Connections:

- 3-pin DMX In/Out
- IEC AC In/Out connectors to daisy chain power
- Laser On/Off with safety key
- Safety eye on rear panel
- Built-in microphone with sensitivity potentiometer
- With wired digital communication network

Electrical:

- Power Draw: 40W max
- Multi-voltage operation: 100-240V, 50/60Hz


Dimensions/Weight:

- Dimensions: 300mm x 312mm x 226mm
- Weight: 3.7 kg

Included:

- Power cable
- Hanging Bracket
- Laser safety key



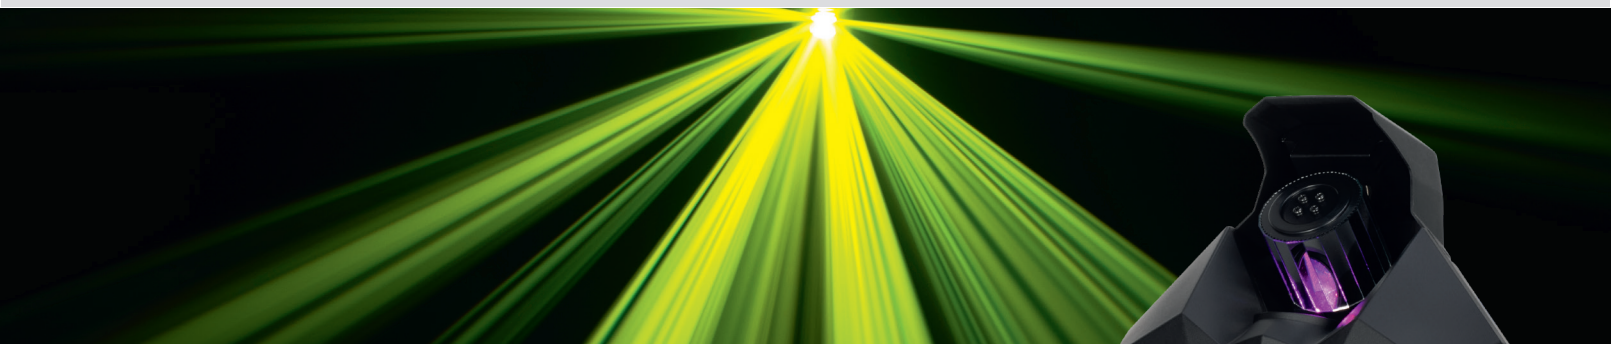

Light Source:
• 80W White LED (50,000 Hrs.)

Barrel Mirror:
• Barrel Movement: X-Axis = 180°, Y-Axis 360°
• Beam Angle: Multiple Beams, 5° each
• Beam Focusing Knob

Colors/GOBOS:
• 10 Color / Gobo combinations
• Color/Gobo Shake


Control:
• 1-40Hz Strobe Rate
• 6 Built-In Light Shows
• Control: DMX512, RDM, Sound and Show Mode
• DMX Modes: 2 DMX Control Modes (10 & 12 Channels)
• 4-Button Digital Display

Connections:
• 3-pin DMX In/Out
• Indoor Locking power input

Electrical:
• Power: 100-240VAC, 50/60HZ
• Power Consumption: 100W

Dimensions/Weight:
• Dimensions (LxWxH): 312x282x157mm
• Weight: 3.2Kg

Approvals:
• IP20

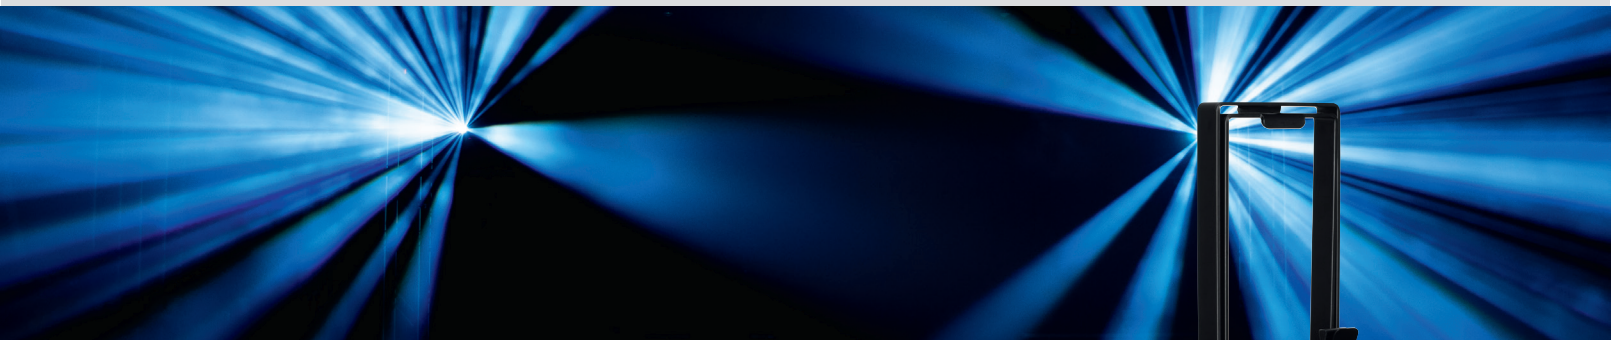

Source:
• 40W White LED Source (9500K) @ 50,000 hours.
• CRI: 80
• LUX: 4121

Features:
• High quality optics - Clear powerful output
• Adjustable beam angle: 15-30 degrees
• Manually adjustable Focus
• 4 manually adjustable Framing Shutters
• Drop in Gobo Slot for Metal or Glass Gobos
• Color Frame For Color Filters
• Run all night – No Duty Cycle
• Compatible with UC IR wireless remote control (included)

GOBO:
• Includes one textured glass GOBO
• GOBO size: 26.8mm; Viewable size: 24mm

Control:
• 2 DMX Channel Modes (3 Ch, 4 Ch)
• Digital display with 4-button function menu
• RDM (Remote Device Management)
• 0-100% Dimming
• Strobe and pulse effects

• 6 Dimmer Curves

Connections:
• 3-pin DMX In/Out
• Locking power In/Out
• Safety Eyelet on Rear

Electrical:
• Multi-voltage: 100-240V, 50/60Hz
• Power consumption: 44W max
• Daisy chain power (24 Ikon Profile Plus @ 230V)

Dimensions & Weight:
• Dimensions (LxWxH): 448 x 150 x 127mm
• Weight: 2.7 kg

What's Included:
• 1 Glass Gobo, 4 Metal Gobo's and 1 Gobo holder
• UC-IR wireless remote
• Gel filter
• Includes scissor yoke to mount on a wall or hang from trussing
• Locking power cord



COSMIC BURST

Code: 1900000035 GTIN/EAN: 810087371166

ELIMINATOR[®]
LIGHTING



Light Source:

- 1 x 10W laser module
- Color temperature: 6,000K - 8,000K
- Beam Angle: 87-degrees
- Lamp life: 10,000 hours
- Diameter of lens: 60mm

Control:

- Display: OLED with 4-button menu system
- DMX Control Modes: 6 or 7 channels
- 5 Built-in lightshows
- Protocols: DMX512 and RDM
- Firmware Upgrade via DMX link
- Smooth dimming from 0~100%
- Adjustable strobe, shutter and pulse effects
- Mirror control: Clockwise/Counter Clockwise; Fast/Slow

Connections:

- DMX Data: 3-pin XLR In/Out
- Power Input: Indoor locking power connector
- Includes laser safety key with on/off lock
- Safety cable connection slot

Electrical:

- Multi-voltage operation: 100-240V, 50-60Hz
- Power Consumption: 20W

Dimensions/Weight:

- Dimensions: 221 x 196 x 238mm
- Weight: 2 kg

Approvals:

- IP Rating: IP20
- Laser Accession Number: 2210851-000

Includes:

- Locking Indoor Power Cable
- Hanging Bracket



MICRO GALAXIAN THREE NEW

Code: 1900000041 GTIN/EAN: 810087371630



Specifications:

- Laser Color: Red 80mW, Green 30mW
- Compact case design
- Control modes: Auto, Sound Active, or Wireless remote
- Built-in programs changeable via the included wireless infrared remote
- Operational Switch: Auto or Sound modes
- Includes built-in microphone for sound active mode
- Complies with FDA standards
- Operating environment: Indoors
- Laser Accession Number: 2321005-000

Weight / Dimensions:

- Dimensions (LxWxH): 170mm x 150mm x 70mm
- Weight: 0.7kg

What's Included:

- 1 x Wireless IR remote
- 1 x Hanging bracket
- 1 x Power cable

Electrical:

- Multi-Voltage: AC100~240V, 50/60 Hz
- Power Consumption: 10W

ELIMINATOR[®]
LIGHTING



MIRROR BALLS & MOTORS



Code:	Description:	GTIN/EAN:
1211100001	Mirror Ball 5 cm	818651022025
1900000200	Mirror Ball 20 cm (EM8)	855666000488
1900000201	Mirror Ball 30 cm (EM12)	855666000495
1900000202	Mirror Ball 40 cm (EM16)	817175010440
1900000203	Mirror Ball 50 cm (EM20)	817175010457
1900000205	Mirror Ball 75 cm (EM30)	810087371746
1900000204	Mirror Ball 100 cm (EM40)	810087371845
1900000215	Mirror Ball Motor 100 cm, 1,5U (for EM40)	810087371661
1900000216	Mirror Ball Motor 50 cm, 1U (for EM20)	810087372026
1900000217	Mirror Ball Motor 50 cm, 3U (for EM20)	810087372033
1900000218	Mirror Ball Motor 40 cm, 1U (for EM16)	810087371708
1900000219	Mirror Ball Motor 40 cm, 3U (for EM16)	810087371678
1900000220	Mirror Ball Motor 30 cm, 1U (for EM12)	819730012753
1900000221	Mirror Ball Motor 50 cm DMX	810087371685



ELIMINATOR
LIGHTING

ELIMINATOR
LIGHTING

SOFTBAGS

Code:	Description:	GTIN/EAN:
1900000150	F4 Par Bag EP	810087371968

- Durable padded Gig Bag for transporting lighting, cables, clamps etc.
- Fits up to 4 Slim type LED Pars
- Padded dividers may be removed to fit other effect lighting, cables, clamps, etc. (see case dimensions)
- Front pockets fit cables and/or controllers
- Inner Bag Dimensions (LxWxH): 360x250x220mm
- Outer Bag Dimensions (LxWxH): 381x305x241mm



F4 PAR BAG EP Outer View

Code:	Description:	GTIN/EAN:
1900000151	F8 Par Bag EP	810087372897

- Durable padded Gig Bag for transporting lighting, cables, clamps etc.
- Fits up to 8 Slim LED Pars
- 7 padded dividers may be removed to fit other effect lighting, cables, clamps, etc. (see case dimensions)
- Front pockets fit cables and/or controllers
- Inner Bag Dimensions (LxWxH): 735x250x220mm



F8 PAR BAG EP Inner View

VF400 EP **NEW**

Code: 1900000300 GTIN/EAN: 810087372187

ELIMINATOR
LIGHTING



- 400W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Warm-up time: 2-3 minutes
- Reheating Time: 30 Seconds
- Second Fog Shooting Time: Around 37 Seconds
- Output: 3,000 cubic ft. per min
- Internal fog fluid tank: .25 Liter (full tank of fluid last 34 min.)
- Fluid level indicator
- Includes Z-VG400EP-R wired remote
- Optional Timer Remote: VFTR40 (not included)
- Only use high quality, water-based fog fluid
- Dimensions: 248mm x 205mm x 198 mm
- Weight: 1.4 kg



VF1100 EP **NEW**

Code: 1900000301 GTIN/EAN: 810087372194

ELIMINATOR
LIGHTING



- 850W mobile pro Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 2 minutes (approximately)
- Reheating Time: 10 Seconds
- Second Fog Shooting Time: 10 Seconds
- Output: 9,000 cubic ft. per min
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes VFEP5R wired remote
- Includes VFEPWR Wireless remote
- Optional Timer Remote: VPEPT3 (not included)
- Fog output switch on rear panel
- Only use high quality, water-based fog fluid
- Dimensions (LxWxH): 341mm x 252mm x 261mm
- Weight: 3 kg



VF1300 EP **NEW**

Code: 1900000302 GTIN/EAN: 810087372200

ELIMINATOR
LIGHTING



- 1100W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- LED heating indicator system in tank: Red = Heating; Green = Ready to use; Flashing = Fog fluid tank is low
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 2-3 minutes
- Reheating Time: 17 Seconds
- Second Fog Shooting Time: Around 12 Seconds
- Output: 12,000 cubic ft. per min
- External fog fluid tank: 2.3 Liter
- Includes VEP5R wired remote
- Includes VFEPW2 wireless remote
- Includes IEC power cable
- Optional VFEP6 timer remote sold separately
- Fog output switch on rear panel
- Only use high quality, water-based fog fluid

- Dimensions (LxWxH): 445mm x 315mm x 200mm
- Weight: 7 kg



- 1500W mobile DMX Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- LED heating indicator system in tank: Red = Heating; Green = Ready to use; Flashing = Fog fluid tank is low
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 8 minutes
- Reheating Time: 15 Seconds
- Second Fog Shooting Time: Around 12 Seconds
- Output: 20,000 cubic ft. per min
- Fog fluid tank: 2.3 Liter (non-removable)
- Includes the VFEP6 timer wired remote
- Includes the VFEP2 wireless remote
- Fog output switch on rear panel
- 3-pin DMX In/Out
- Safety Loop
- Only use high quality, water-based fog fluid

- Dimensions (LxWxH): 495mm x 355mm x 230mm
- Weight: 10 kg



Features:

- 750W professional vertical Fog Machine
- Light Source: 6 x 3-Watt LEDs, (2 Red, 2 Green, & 2 Blue LEDs)
- Convenient carrying handle
- Low Fluid LED Indicator on rear
- Manual fog trigger button on rear panel
- External fog fluid tank: 1 Liter
- 2 Operational modes: Manual & Remote Control
- Power Connection: IEC AC In
- Wired remote output
- Only use high quality, water-based fog fluid

Output:

- Fog Output: 8,000 (cu.ft/min)
- Fluid consumption: 14ml/min
- Warm-up time: 6 min
- Output time: 8 seconds (max)
- Reheat interval: 9.3 seconds (Average)
- Second Fog Shooting Time: 9 Seconds

Pump Features:

- High performance pump for optimum output
- ADJ's Electronic Thermo Sensing (ETS) technology
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging

Electrical:

- Voltage: AC 120V or 240 50/60Hz (non switching)
- Power Consumption: 770W
- Heater: 750W

Dimensions & Weight:

- Dimensions (LxWxH): 327mm x 212mm x 177mm
- Weight: 3.36 kg

What's Included:

- Included Accessory: VFV-WR wireless remote



Heater:

- 700W Heater
- Warm up Time: 3 Minutes
- Reheating Time: 27 Seconds
- Second Fog Shooting Time: Around 36 Seconds
- 120V/50Hz or 230V/60Hz (non switchable)

Features:

- Low-lying fog stays low to the ground—similar to a dry ice effect
- Uses standard water based fog juice and ice cubes
- No need for expensive fog chillers, bulky air conditioning units or dry ice
- Perfect for Halloween FX and theatrical events; creates popular "grave yard" and "dancing on a cloud" effects
- Load up to 4 pounds of ice in the chiller box
- Power On/Off switch
- Fog fluid container: 0.8 Liter (external)

- Output: 3,000 cubic feet per minute
- Fluid Consumption: 90ml/min

What's Included:

- Includes ADJ VFTR13 3,6m wired remote with On/Off, continuous and manual buttons, plus interval and duration output potentiometers
- Water drainage valve system allows for easy clean-up. Water drains directly into the provided plastic bag.

Dimensions / Weight:

- Dimensions (LxWxH): 464mm x 306mm x 261 mm
- Weight: 7.4 kg
- CE Certified



BUBBLETRON EX **NEW**

Code: 1900000306 GTIN/EAN: 810087372118

ELIMINATOR
LIGHTING



- Portable high output bubble machine - creates hundreds of bubbles per minute
- Durable plastic casing with EZ-Access front fluid tank
- Large high velocity fan makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit
- ON/OFF wired remote with 25 ft./8M cable
- Carrying handle
- Most types of bubble liquid acceptable
- Power Consumption: 24W
- Fluid Consumption Rate: 1 Liter every two hours; 120V:20 ml/min, 230V: 11ml/min
- Voltage: AC 230V/60Hz
- Dimensions (LxWxH): 352mm x 176mm x 209mm
- Weight: 2kg



BUBBLETRON EXL **NEW**

Code: 1900000307 GTIN/EAN: 810087372132

ELIMINATOR
LIGHTING



- Battery powered portable high output bubble machine
- Creates hundreds of bubbles per minute
- Extra-large, durable plastic casing with EZ-Access front fluid tank
- Unique dual fan system that push bubbles up in the air so they can travel further
- ON/OFF switch on rear of unit
- Carrying handle
- Includes BUBGO-WR Wireless Remote Control

Fluid Tank:

- Tank Capacity: 2 Liter
- Fluid Consumption Rate: 16ml/ per minute

Battery:


- Battery Capacity: 4.0Ah
- Battery Operating Time (full power): 3 hours
- Battery Charging Time: (per cycle): 6 hours

Electrical:

- Power Consumption: 15W @ 120V
- Voltage: AC 100-240V, 50/60Hz (charger) DC 12V, 1000 mA

Dimensions / Weight:

- Dimensions (LxWxH): 359mm x 266mm x 278mm
- Weight: 4.4 kg

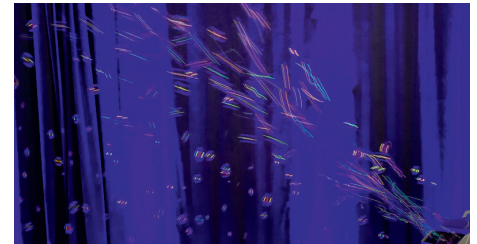

BUBBLETRON EX GO **NEW**

Code: 1900000308 GTIN/EAN: 810087372224


ELIMINATOR
LIGHTING



- Portable high output bubble machine
- Creates hundreds of bubbles per minute
- Durable plastic casing with EZ-Access front fluid tank
- 1 Liter Fluid Tank
- Large high velocity fan makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit
- ON/OFF Wireless remote controller BUBGO-WR included
- Carrying handle
- Most types of bubble liquid acceptable
- Power Consumption: 17W
- Fluid Consumption Rate: 1 Liter every 50 Mins
- Battery life indicator with charge indicator
- Battery Charge Time: 6 Hours (Per Cycle)
- Battery Life: 5 Hours (Full On)
- (Charger): DC12V 1000mA
- Dimensions (LxWxH): 352mm x 176mm x 209mm
- Weight: 2kg

Battery Specifications:

- Battery Charge Time: 6 Hours
- Battery Life: 5 Hours Full On(Full Charge)
- Battery Lifetime: Average Lifetime is 500 Charges (This depends on charging frequency)
- Battery Type: Fixed Lithium Battery
- Battery Energy: 4WH (Watt Hours)
- Battery Weight: 260g
- Battery Voltage: 3.7V
- Battery Capacity: 4Ah
- Total Lithium Ion Cells: 3pcs

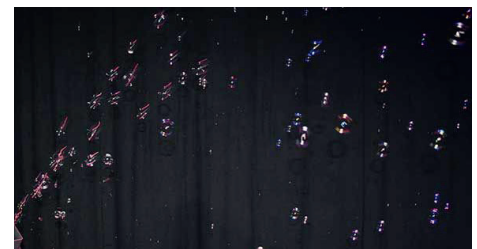

Features:

- Battery powered portable high output bubble machine
- Creates hundreds of bubbles per minute
- Extra-large, durable plastic casing with EZ-Access front fluid tank
- Unique dual fan system that push bubbles up in the air so they can travel further
- ON/OFF switch on rear of unit
- Carrying handle
- Includes BUBGO-WR Wireless Remote Control

Fluid Tank:

- Tank Capacity: 2 Liter
- Fluid Consumption Rate: 16ml/ per minute

Battery:


- Battery Capacity: 4.0Ah
- Battery Operating Time (full power): 3 hours
- Battery Charging Time: (per cycle): 6 hours

Electrical:

- Power Consumption: 15W @ 120V
- Voltage: AC 100-240V, 50/60Hz (charger) DC 12V, 1000 mA

Dimensions / Weight:

- Dimensions (LxWxH): 359mm x 266mm x 278mm
- Weight: 4.4 kg

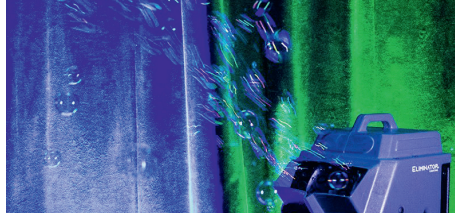

- 1250W mobile DMX Snow Machine
- Spray distance: 8-10 meters
- Volume selection switch: Low or high snow output
- Low snow fluid sensor to protect pump
- Internal snow fluid tank: 2.3 Liter
- Fluid consumption : 505ml/min max
- Fluid level indicator
- Includes wired remote
- ADJ UC IR Compatible (Sold Separately)
- On/Off switch on rear panel
- 3-pin DMX In/Out
- Uses water based snow fluid
- Power Draw: 1250 W
- Dimensions (LxWxH): 510 x 316 x 349mm (With Bracket) 510 x 316 x 268mm (Without Bracket)
- Weight: 8 kg




The VPEPT3 is an optional timer remote suitable for the following units:

- VF1100 EP
- VF1300 EP




Pro Event TBL2 MB

Code: 1900000105 GTIN/EAN: 810087371739

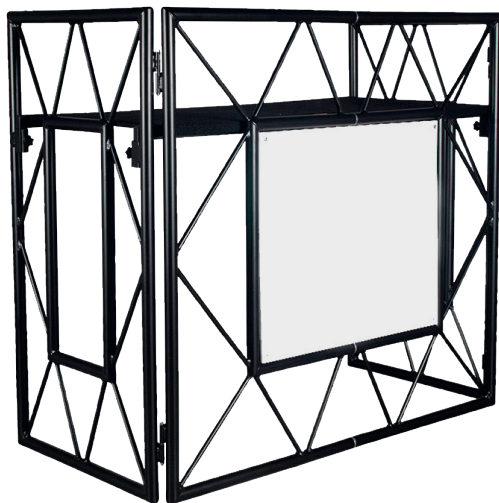


- Professional Event Table to use as a greeting table, sales table, live sound or lighting designer console or for DJs
- Matt Black powdercoated finish
- Compact and collapsible to half of its width
- Lightweight, around 18 kg.
- Functional and professional looking
- Dimensions (LxWxH): 1270 x 610 x 1155mm
- Tube Diameter 32mm
- Optional transport bag available (PRO-ETBS, code 1731000028)
- Front board to add custom graphic (one side with Accu-Stand logo, other side blank) (Size W x H : 635 x 571,5mm)
- Max table load: 30 kg

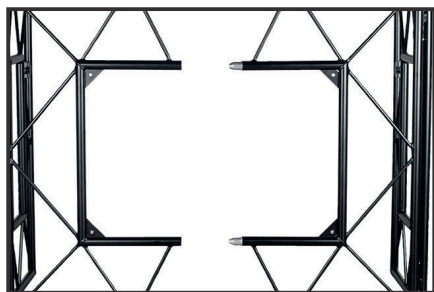


Pro Event TBL 2

Code: 1900000106 GTIN/EAN: 810087371722

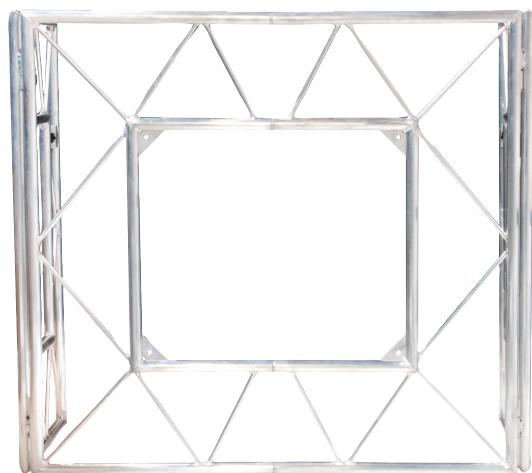

- Professional Event Table to use as a greeting table, sales table, live sound or lighting designer console or DJs
- Compact and collapsible to half of its width
- Lightweight, around 18 kg.
- Functional and professional looking
- Dimensions (LxWxH): 1270x610x1155mm
- Tube Diameter 32mm
- Optional transport bag available (PRO-ETBS Pro Event Table Bag II, code 1731000028)
- Front board to add custom graphic (Size W x H : 635 x 571,5mm)
- Max table load: 30 kg

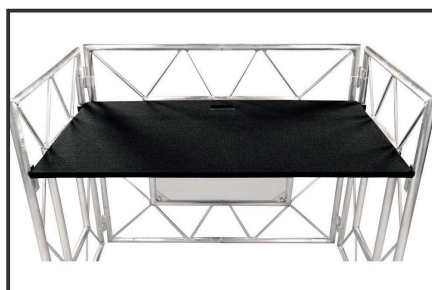


Pro Event TBL Accessories



Code: 1900000103 Description: Pro Event IBeam ST GTIN/EAN: 810087371852

- Aluminum I-Beam truss for the Accu-Stand Pro Event TBL and ADJ Pro Event Table II to hang lighting fixtures such as light weight par cans, wash fixtures, effect lights or small moving heads
- Includes hardware for mounting to the table
- Includes carry bag
- Use Duratruss Junior Clamp to hang lighting (clamps sold separately)
- Height: 2.2M
- Maximum load: 45 kg. (lighting fixtures should be evenly distributed)
- Collapsed size (LxWxH): 1320mm x 290mm x 110mm
- Weight: 7 kg

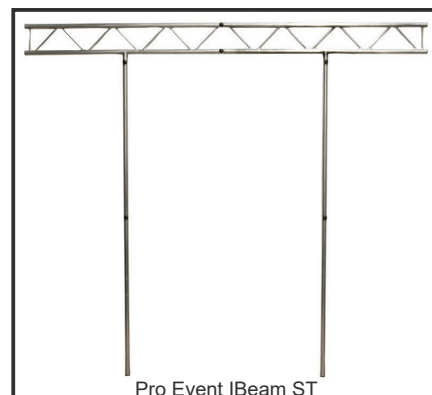

Pro Event IBeam ST



Code: 1900000100 Description: Pro Event Table 2 Bag GTIN/EAN: 810087371890

The Accu-Stand Pro Event Table 2 Bag is a black carrying bag accessory for the Pro Event TBL2. Protect your Pro Event TBL from dust, dings and scratches. Carry strap makes it easy to transport and store.



Pro Event Table 2 Bag



Code: 1731000030 Description: Pro Event Table Bag Heavy Duty GTIN/EAN: 810087370541

Heavy duty bag made out of high grade Cordura with padded fabric and a double zipper for extra protection. Easy to carry due to double straps. (Made in the EU)



Pro Event Table Heavy Duty



Code: 1900000101 Description: Pro Event Table Scrim BLK GTIN/EAN: 810087371876

Black Scrim for Pro Event Table, Pro Event Table II and the latest Accu-Stand Pro Event TBL 2



Pro Event Table Scrim WH / BLK


Code: 1900000104 Description: Pro Event Table Scrim WH GTIN/EAN: 810087371869

White Scrim for Pro Event Table, Pro Event Table II and the latest Accu-Stand Pro Event TBL 2



Code: 1900000102 Description: Pro Event Table Corner Shelf (Pair) GTIN/EAN: 810087371883

Aluminum corner shelf for Pro Event Table / Pro Event TBL. Sold in Pairs of 2.

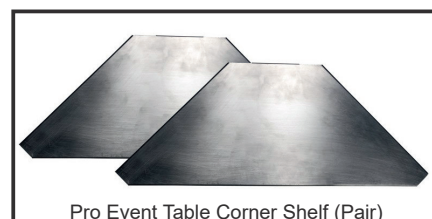

Pro Event Table Corner Shelf (Pair)

LTS-6 AS

Code: 1900000108 GTIN/EAN: 810087371838

ACCU-STAND™
PROFESSIONAL SUPPORT SYSTEMS



- Extends up to 3m
- Stand collapses easily for transport and is ideal for mobile DJs, bands or small stage productions
- Includes T-bar with 8 hanging point bolts
- T-Bar Diameter: 2.5cm (1-inch)
- Includes FS-Adapter - designed to mount one light at a time at the top of the stand
- Weight: 5kg

Event Façade 2W

Code: 1900000107 GTIN/EAN: 810087371715

ACCU-STAND™
PROFESSIONAL SUPPORT SYSTEMS



- Frames made of strong and light weight white metal
- With detachable hinges and frames - breaks down in half, now even easier for transport and for storage
- Includes removable white & black fire retardant scrim
- Includes a carrying bag to protect the frames and scrim during storage and transportation
- Scrim to be washed by hand in cold water, lay flat to dry. Do not twist to avoid deformation
- Dimensions (LxWxH):
Complete Stand: 2800 x 25.4 x 1200mm;
Each Panel: 700 x 25.4 x 1200mm;
Bag: 1265 x 750 x 159mm
- Weight: 16.5 kg

Event Façade 2 B

Code: 1900000109 GTIN/EAN: 810087372385

ACCU-STAND™
PROFESSIONAL SUPPORT SYSTEMS



- Frames made of strong and light weight black metal
- With detachable hinges and frames - breaks down in half, now even easier for transport and for storage
- Includes removable white & black fire retardant scrim
- Includes a carrying bag to protect the frames and scrim during storage and transportation
- Scrim to be washed by hand in cold water, lay flat to dry. Do not twist to avoid deformation
- Dimensions (LxWxH):
Complete Stand: 2800 x 25.4 x 1200mm;
Each Panel: 700 x 25.4 x 1200mm;
Bag: 1265 x 750 x 159mm
- Weight: 16.5 kg

ELIMINATOR
LIGHTING

 **ACCU-STAND**
PROFESSIONAL SUPPORT SYSTEMS™

**SIGN UP FOR OUR ELIMINATOR NEWSLETTER
SCAN THE QR CODE BELOW:**



WWW.ADJ.EU/ELIMINATORLIGHTING

EU CATALOGUE V1

ELIMINATOR
LIGHTING

ACCU-STAND
PROFESSIONAL SUPPORT SYSTEMS

FOLLOW ELIMINATOR LIGHTING ON SOCIAL MEDIA:



[www.facebook.com/
eliminatorlighting](https://www.facebook.com/eliminatorlighting)



[www.instagram.com/
eliminator_lighting](https://www.instagram.com/eliminator_lighting)



[www.youtube.com/c/
EliminatorLighting](https://www.youtube.com/c/EliminatorLighting)

Your Contact:

**Eliminator Lighting and
Accu-Stand**
Part of A.D.J. Supply Europe B.V.
Junostraat 2
6468 EW Kerkrade
The Netherlands

+31 45 546 85 00
info@adj.eu



All rights reserved. All specifications are subject to change without prior notice.
We assume no liability for typing or printing errors. No printing or copying without explicit consent.
Always check our website for the most up-to-date product information.