



**SHOWVEN**<sup>®</sup>

PASSION FOR INNOVATION

---

**PRODUCT CATALOGUE 2022**



*Sparks Up Your Show*

# PASSION FOR INNOVATION



## ABOUT US


- \ Est. in 2015
- \ Founder of SPARKULAR®
- \ US, EU etc. global patents coverage
- \ 100+ Patents in China
- \ 20+ R&D engineers
- \ 10% annual revenue spent on R&D
- \ 3-5 new products launches per year
- \ State Level Technologically Advanced "Little Giant" Enterprise
- \ 34000m<sup>2</sup> self owned industrial park
- \ ISO9001 certified factory
- \ CE, FCC certified products
- \ Partners available in 90+ countries and regions
- \ PRODUCT RANGE:  
SPARKULAR®, FLAMER, SMOKE, CONFETTI, FX CONSOLE etc.

**INNOVATION**

**QUALITY**


**SERVICE**

# PATENTS AND CERTIFICATES:



**PRODUCT RANGE:**

**\ SPARKULAR® \ FLAME \ SMOKE \ CONFETTI \ LOW FOG \ FX CONSOLE**

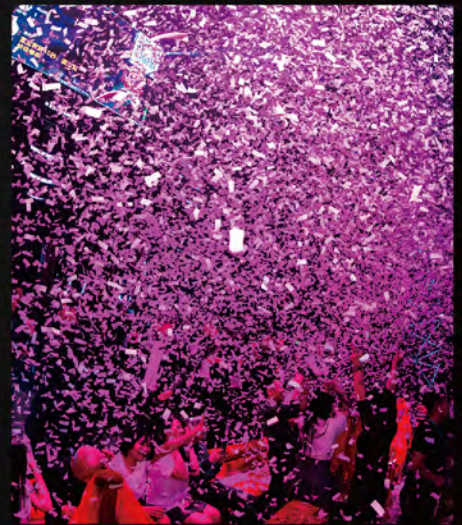

PROFESSIONAL  
SAFETY  
INTUITIVE  
PRECISE  
POWERFUL  
PERSONALIZED



Product Video

## FXcommander™

### SFX & PYRO CONSOLE FOR PROFESSIONALS

The FXcommander™ is designed to be a professional while intuitive control solution for SFX and Pyro engineer, it allows to control all DMX device such as SPARKULAR®, FLAMER, FOG, HAZE, CONFETTI etc. in a safe and professional way. Together with our original slaves it can also programming fireworks display wirelessly. Take advantage of the 10.1 inch capacitance touch screen and powerful software system, it allows FX operators edit a show in a few minutes, everything in the system are intuitively designed, no lighting console operation background needed. Large scale shows with special effects and fireworks can be sync with music precisely through our professional windows software FXcommander™\_Editor. The FXcommander™ is setting the safety standard for the special effects control.



\ FXcommander™\_Editor



\ FXcommander™

#### SPECIFICATIONS

\ DIMENSION: 314×270×65mm

\ WEIGHT: 4kg

\ VOLTAGE: AC 220V/110V, 50/60 Hz

\ WORK POWER: 20W

\ CASING MATERIAL: Aluminium

\ BATTERY POWERED: Yes

\ WIRELESS FUNCTION: 2.4G wireless DMX, Dual band wireless PYRO

\ INTERFACE: 1\*USB, 1\*USB Download, 1\*LAN, 1\*Audio Output, 1\*MIDI IN, 1\*LTC IN, 1\*3-PIN DMX OUT, 1\*5-PIN DMX OUT, 1\*External Trigger



Product Video

## SPARKULAR® II

- \ Adjustable effect up to 6m
- \ Low noisy mode switchable
- \ Optimized feeding structure, powerful motor, minimize the stuck risks
- \ Motor status real time monitoring, safer to use and easier problem diagnosis
- \ New generation output tube, better effect
- \ EU and US patented technology
- \ Aluminum top plate module, sturdy and durable
- \ Rainproof structure, can be used in rain
- \ Flat structure, better for stage layout
- \ 3.2" LCD color screen, user friendly operation
- \ Both DMX and wireless remote control
- \ Individual safety DMX address

For safety use, please don't touch sparks with hands or other flammable objects

### SPECIFICATIONS

- \ MODEL: BT11/BT12
- \ DIMENSION: 286×280×258mm
- \ WEIGHT: 9kg
- \ VOLTAGE: 220V(BT11)/110V(BT12), 50/60Hz
- \ WORK POWER: 500W
- \ EFFECT HEIGHT: HC8200 LARGE: 3-6m/MEDIUM: 2-4.5m/SMALL: 1.5-3m
- \ HOPPER CAPACITY: Appr. 300g
- \ CONTROL: DMX, Wireless
- \ INTERFACE: Neutrik®powerCON TRUE1 IN/OUT 3 and 5 pin DMX IN/OUT
- \ DMX channels:2
- \ CASING MATERIAL: Anti-flaming ABS + PC, Aluminum



SHOWVEN®



Product Video

## SPARKULAR® SPIN

- \ Bidirectional rotatable
- \ Adjustable rotation speed
- \ Stainless steel panel, stable and durable
- \ DMX controllable, 2/4 channels switchable
- \ Built-in wireless control, easy programming
- \ Two 20° angled nozzles generate a waltz-like lissome and romantic sparks effects

### SPECIFICATIONS

- \ MODEL: BT81/BT82
- \ DIMENSION: 330×305×349mm
- \ WEIGHT: 20kg
- \ CASING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V(BT81)/110V(BT82), 50/60Hz
- \ WORK POWER: 1000W
- \ WORK TEMP.: -20°C~50°C
- \ EFFECT HEIGHT: HC8200 MEDIUM: 2~4m/LARGE: 2~5m
- \ HEIGHT ADJUSTABLE: YES
- \ EFFECT DIRECTION: two 20° angled nozzles
- \ HOPPER CAPACITY: 200g\*2
- \ HC8200 CONSUMPTION RATE: 20g/min\*2
- \ CONTROL: DMX 2/4 channels switchable, wireless remote
- \ INTERFACE: Neutrik®powerCON TRUE1 IN/OUT Neutrik®3-pin&5-pin XLR IN/OUT
- \ HOUSING COLOR OPTIONAL: Black, White







Product Video

## SPARKULAR® JET

- \ Flashing SPARKULAR® effect invented by SHOWVEN®
- \ Effect similar to 1s fountain fireworks
- \ No gunpowder, no pyro smell
- \ Effect height up to 10m
- \ Stainless steel housing
- \ Multi internal safety design
- \ DMX control, easy setup and installation
- \ Neutrik®powerCON TRUE1 connectors

### SPECIFICATIONS

- \ MODEL: BT91/BT92
- \ DIMENSION: 320×280×300mm
- \ WEIGHT: 16.5kg
- \ VOLTAGE: 220V(BT91)/110V(BT92), 50/60Hz
- \ WORK POWER: 350W
- \ EFFECT HEIGHT: HC8200 LARGE: 8~10m/MEDIUM: 6~8m/SMALL: 4-5m
- \ HOPPER CAPACITY: 450g
- \ EFFECT HEIGHT: UP TO 10m
- \ CASING MATERIAL: 304 Stainless steel
- \ CONTROL: DMX, 2 channels
- \ INTERFACE: 3-PIN and 5-PIN XLR, Neutrik®powerCON TRUE1 IN/OUT





Product Video

## SPARKULAR® PRO

- \ Original design, built for outdoor installations
- \ Stainless steel panel, durable and reliable
- \ 1200g super hopper, support long effects time
- \ Neutrik® waterproof sockets
- \ IP55-rated weatherproof enclosure, ideal for outdoor use
- \ Effects up to 5.5m, height adjustable

### SPECIFICATIONS

- \ MODEL: BT71/BT72
- \ DIMENSION: 315×290×285mm
- \ WEIGHT: 16.5kg
- \ CASING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V(BT71)/110V(BT72), 50/60Hz
- \ WORK POWER: 600W(220V)/700W(110V)
- \ WORK TEMP.: -20°C~50°C
- \ EFFECT HEIGHT: HC8200 LARGE/LARGE: 5~5.5m adjustable
- \ EFFECT DIRECTION: vertical
- \ HOPPER CAPACITY: 1200g
- \ HC8200 CONSUMPTION RATE: 20g/min
- \ CONTROL: DMX 2 channels
- \ INTERFACE: Neutrik® powerCON TRUE1 IN/OUT Seetronic® 3-pin XLR IN/OUT



SHOWVEN®



Product Video

## SPARKULAR® Cyclone

- \ Impressive spark effect with adjustable height up to 10m
- \ Auto brake system, ensure immediate stop even in max output
- \ High frequency noise attenuation design
- \ Neutrik®powerCON TRUE1, both 3-pin and 5-pin XLR connectors
- \ Reinforced stainless steel panel structure

### SPECIFICATIONS

- \ MODEL: BT61/BT62
- \ DIMENSION: 457×370×280mm
- \ WEIGHT: 25kg
- \ CASING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V(BT61)/110V(BT62), 50/60Hz
- \ WORK POWER: 1700W
- \ WORK TEMP.: -20°C~50°C
- \ EFFECT HEIGHT: 6-10m adjustable
- \ EFFECT DIRECTION: vertical
- \ HOPPER CAPACITY: 500g
- \ HC8200 CONSUMPTION RATE: 75g/min
- \ CONTROL: DMX 2 channels
- \ INTERFACE: Neutrik®powerCON TRUE1 IN/OUT Neutrik®3-pin&5-pin DMX IN/OUT



SHOWVEN®



## SPARKULAR® TRIPLE

- \ 3-directions SPARKULAR® machine
- \ Triple heads, multi effects
- \ Separate control of each nozzle
- \ Neutrik®powerCON TRUE1 in/out
- \ DMX controllable
- \ RDMX function with SHOWVEN® original host controller

### SPECIFICATIONS

- \ MODEL: BT51/BT52
- \ DIMENSION: 400×290×270mm
- \ WEIGHT: 20kg
- \ CASING MATERIAL: carbon steel
- \ VOLTAGE: 220V(BT51)/110V(BT52), 50/60Hz
- \ WORK POWER: 1500W
- \ WORK TEMP.: -20°C~50°C
- \ EFFECT HEIGHT: 2-5m adjustable
- \ EFFECT DIRECTION: 3
- \ HOPPER CAPACITY: 160g\*3
- \ HC8200 CONSUMPTION RATE: 17g/min\*3
- \ CONTROL: DMX 6 channels
- \ INTERFACE: Neutrik®powerCON TRUE1 IN/OUT Neutrik®3-pin&5-pin XLR IN/OUT



SHOWVEN®



Product Video

## SPARKULAR®

- \ Original innovation introduced by SHOWVEN®
- \ Patented non-pyro technology
- \ Safe, no gunpowder, no smoke and pyro smell
- \ Adjustable sparks effects from 1.5 to 5m
- \ Up to 10-20min effects time after fill up
- \ DMX controllable, can be started and stopped at any time
- \ Easy setup and teardown

### SPECIFICATIONS

- \ MODEL: BT01/BT02
- \ DIMENSION: 200×218×305mm
- \ WEIGHT: 8.5kg
- \ VOLTAGE: 220V(BT01)/110V(BT02), 50/60Hz
- \ WORK POWER: 500W
- \ HOPPER CAPACITY: 200g
- \ HC8200 CONSUMPTION RATE: Appr.20g/min
- \ EFFECT HEIGHT: 1.5-5m adjustable
- \ INTERFACE: 3-pin XLR, POWER IN/OUT
- \ CONTROL: DMX 2 channels



Winner of Best Debut Product

SHOWVEN®



Product Video

## SPARKULAR® mini

- \ Safe, non-pyro, no gunpowder and multi built-in safety sensors
- \ Integrated wireless technology, unexposed, anti-collision
- \ One button start, easy operation
- \ Tilt protection, safer for use
- \ Light weighted and compact design, easy to carry

### SPECIFICATIONS

- \ MODEL: BT06/BT07
- \ DIMENSION: 168×180×228mm
- \ WEIGHT: 4.5kg
- \ VOLTAGE: 220V(BT06)/110V(BT07), 50/60Hz
- \ WORK POWER: 380W
- \ HOPPER CAPACITY: 100g
- \ HC8200 CONSUMPTION RATE: Appr.15g/min
- \ EFFECT HEIGHT: 2-2.5m (HC8200 MEDIUM) 3-3.5m (HC8200 LARGE)
- \ INTERFACE:3-pin XLR, POWER IN/OUT
- \ CONTROL: DMX 2 channels, Wireless Remote
- \ HOUSING COLOR OPTIONAL: Black, White





## SPARKULAR® FALL

- \ Sparks "waterfall" effects for professional stage
- \ Fall length from 2-7m with different HC8200
- \ Up to 13-21min effects duration after fill up
- \ Easy setup and teardown with multi locations
- \ DMX / Wireless remote control, can be started and stopped at any time
- \ Switchable effects mode (Low Level/High Level)

### SPECIFICATIONS

- \ MODEL: BT04/BT05
- \ DIMENSION: 196×208×192mm
- \ WEIGHT: 6.0kg
- \ VOLTAGE: 220V(BT04)/110V(BT05), 50/60Hz
- \ WORK POWER: 500W
- \ HOPPER CAPACITY: 280g
- \ HC8200 CONSUMPTION RATE: Appr.20g/min
- \ EFFECT HEIGHT: 2-7m(according to HC8200 type)
- \ INTERFACE:3-pin XLR, POWER IN/OUT
- \ CONTROL: DMX 2 channels, Wireless Remote
- \ ADAPTABLE TRUSS SIZE: 40-60mm



SHOWVEN®



Product Video

## SPARKULAR® miniFALL

- \ Sparks "waterfall" effects for indoor use
- \ New generation spark technology
- \ D-quiet Technology, low noisy
- \ Low power consumption, energy saving
- \ Neutrik®powerCON connectors
- \ Light weighted, easy for hanging and carry

### SPECIFICATIONS

- \ MODEL: BT14/BT15
- \ DIMENSION: 150×160×240mm
- \ WEIGHT: 3.0kg
- \ VOLTAGE: 220V(BT14)/110V(BT15), 50/60Hz
- \ WORK POWER: 130W
- \ HOPPER CAPACITY: 280g
- \ HC8200 CONSUMPTION RATE: Appr.15g/min
- \ EFFECT HEIGHT: 2-3m(HC8200 MEDIUM) 3-4m(HC8200 LARGE)
- \ INTERFACE: Neutrik®powerCON IN/OUT 3-pin XLR IN/OUT
- \ CONTROL: DMX 2 channels, Wireless Remote
- \ ADAPTABLE TRUSS SIZE: 40-60mm





SHOWVEN®



Product Video

## PORTABLE PACK

- \ Removable power supply for SPARKULAR® and SPARKULAR® mini
- \ Smart design, easy operation and installation
- \ Get rid of dependence on main power supply, achieve real wireless
- \ Ideal choice for outdoor events, weddings, mobile displays

### SPECIFICATIONS

- \ MODEL: SP0520/SP0521
- \ DIMENSION: 266×235×130mm
- \ WEIGHT: 7.5kg
- \ OUTPUT: 220V(SP0520)/110V(SP0521), 500W
- \ BATTERY CAPACITY: 24V10AH
- \ HOUSING COLOR OPTIONAL: Black, White





**SHOWVEN® FLAME SYSTEM** is a hydraulic based flame effect solution for project or truss mounted installations. It consists of flame head, pump station, control box and accessories such as hoses, cables etc. It can easily achieve remote fuel supply with the pump station and no nitrogen tank needed. Any installation direction of flame heads brings endless design inspiration to event planners. In order to meet the requirements of different application scenarios we designed two pump stations (uPumper P20 and uPumper P4) and two flame heads (uFlamer® PF10 and uFlamer® X1800).



uPumper P20



uPumper P4



uFlamer® PF10



uFlamer® X1800

## uPumper P20

- \ Reinforced 304 stainless steel housing
- \ Remote fuel and pressure supply
- \ Built in pump, no Nitrogen tank needed
- \ 250L extra large fuel tank
- \ Support 20 flame heads
- \ Electronic digital fuel level display
- \ Configured with pressure monitoring
- \ Intelligent solenoid valve block design ensure system pressure under control

### SPECIFICATIONS

- \ DIMENSION: 1100×700×1095 mm
- \ WEIGHT: 285kg
- \ HOUSING MATERIAL: 304 stainless steel
- \ VOLTAGE: 380V
- \ WORK POWER: 6000W
- \ TANK CAPACITY: 250L
- \ PUMP OUTPUT: 110L/min
- \ MAX. SUPPORTED FLAME HEADS: 20 heads
- \ WORK TEMP.: -20 – 50°C
- \ SUPPORT FUEL: ISOPAR L
- \ COMPATIBLE FLAME HEAD: PF10, X1800



## uPumper P4

- \ Reinforced 304 stainless steel housing
- \ Remote fuel and pressure supply
- \ Built in pump, no Nitrogen tank needed
- \ 32L fuel tank
- \ Support 4 flame heads
- \ Electronic digital fuel level display
- \ Configured with pressure monitoring
- \ Fueling and pressurize function switchable

### SPECIFICATIONS

- \ DIMENSION: 580×420×460mm
- \ WEIGHT: 48kg
- \ HOUSING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ WORK POWER: 1800W
- \ TANK CAPACITY: 32L
- \ MAX. SUPPORTED FLAME HEADS: 4 heads
- \ PUMP OUTPUT: 15L/min
- \ SUPPORT FUEL: ISOPAR
- \ WORKING MODE: Pressurize/Fueling
- \ COMPATIBLE FLAME HEAD: PF10 / X1800 (Pressurize), uFlamer® Volcano (Fueling)



## uFlamer® PF10

- \ IP67 rated waterproof for fixed outdoor installations
- \ Dual solenoid valve for extra safety
- \ Dual igniter ensure successful ignition
- \ Oxidation treated housing, durable for outdoor installation
- \ Highlight digital tube display convenient for remote debugging
- \ Aluminum CNC machining structure
- \ Built-in accumulator
- \ Infrared remote control realizes non-contact setting
- \ DMX / direct ON-OFF control customizable
- \ 220V, 110V, 24V etc. voltage customizable

### SPECIFICATIONS

- \ DIMENSION: 250×200×410mm
- \ NET WEIGHT: 15kg
- \ HOUSING MATERIAL: Aluminum
- \ VOLTAGE: 220V, 110V, 24V customizable
- \ WORK POWER: 120W
- \ FLAME HEIGHT: Up to 10m
- \ FUEL: ISOPAR
- \ FUEL CONSUMPTION: 60ml/s (Nozzle M), 30ml/s (Nozzle L)
- \ IGNITION: Dual, high voltage electron ignition
- \ CONTROL: DMX, Direct ON-OFF customizable
- \ QUICK COUPLERS: ISO7241B G1/4 male
- \ WORK PRESSURE RANGE: 8-12bar
- \ Installation angles: Any direction even upside down



## uFlamer® X1800

- \ 210° swivel angles, can be used in rain
- \ Dual solenoid valve for extra safety
- \ Dual ignitor ensure successful ignition
- \ 88 preset firing sequences, easy to operate
- \ Stainless steel housing
- \ Built-in accumulator
- \ DMX control, Support 9-60V pyro signal

### SPECIFICATIONS

- \ DIMENSION: 370×380×380mm
- \ WEIGHT: 19kg
- \ HOUSING MATERIAL: 304 Stainless steel
- \ VOLTAGE: 220V, 110V
- \ WORK POWER: 260W
- \ FLAME HEIGHT: Up to 10m
- \ USAGE IN RAIN: yes
- \ QUICK COUPLERS: ISO7241B G1/4 male
- \ MIN. FIRING DURATION: 0.1s
- \ FIRING ANGLE: 210° (±105°)
- \ FUEL: ISOPAR
- \ FUEL CONSUMPTION: 60ml/s (Nozzle M), 30ml/s (Nozzle L)
- \ IGNITION: Dual, high voltage electron ignition
- \ CONTROL: DMX, 9-60V Pyro signal
- \ USAGE IN RAIN: yes
- \ WORK PRESSURE RANGE: 8-12bar
- \ INSTALLATION ANGLES: Any direction, bottom plate need protective cover (optional) to achieve waterproof function



## uControllBox C12

uControllbox C12 is voltage output signal control module, it is used in DIRECT ON-OFF control mode in SHOWVEN® flame system the function is to convert the DMX signal from the master console into a voltage signal for output, and control ignition and firing of flame head through the output voltage. A unit of uControllbox C12 maximum support 12units of flame head. It is designed for installation in electrical cabinet.



## Other Accessories

### Hose

- \ High pressure steel wire braided rubber hose.
- \ Main hose is used to connect between uPumper P20 to fuel dispenser.
- \ Branch Hose is used to connect between fuel dispenser to flame head, uPumper P4 to flame head.



\ Main Hose 1¼ DN32



\ Branch Hose 3/8 DN10

### Fuel Dispenser

- \ Fuel distribution between pump station and flame heads.



\ T-shape dispenser T 1¼-1¼-1¼



\ Fuel dispenser 1 TO 6



\ T-shape dispenser T 1¼-3/8-1¼



\ Fuel dispenser 1 TO 12



## uFlamer® Volcano

- \ 5-heads plug and play liquid flamer with effects up to 10m
- \ Independent control of each head
- \ 25L built-in stainless steel fuel tank, support automatic refueling station
- \ Real-time fuel level display
- \ Integrated valve block design, premium and independent jet valve
- \ Customized waterproof igniter and structure design, can be used in rain
- \ DMX control, compatible with 9-60V pyro signal
- \ Safety switch, intelligent electronic control alarming system

### SPECIFICATIONS

- \ DIMENSION: 630×450×400mm
- \ WEIGHT: 48kg
- \ HOUSING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ WORK POWER: 2000W
- \ FLAMER HEIGHT: 8-10m
- \ FLAME ANGLES: 5 directions
- \ FUEL: ISOPAR, ISOPROPNOL
- \ FUEL TANK CAPACITY: 25L
- \ FUEL CONSUMPTION: 60mL/s per nozzle
- \ WORK TEMP.: -20°C to 50°C
- \ INTERFACE: SEETRONIC 3-PIN & 5-PIN XLR, Neutrik® PowerCON TRUE1
- \ IGNITION: High voltage electron ignition
- \ CONTROL: DMX, 9-60V Pyro
- \ USAGE IN RAIN: YES





## uPumper Fueling Station

SHOWVEN® uPumper Fueling Station is design for remote fueling of the standalone flammers such as uFlamer® Volcano. It is an ideal solution for situation that requires frequent refueling, such as theme park etc projects installations, flame heads used at high frequency or installed on truss where refueling is not convenient.

- \ Reinforced 304 stainless steel housing
- \ Electronic digital fuel level display
- \ Configured with pressure monitoring
- \ No Nitrogen tank needed
- \ 250L extra large fuel tank



### SPECIFICATIONS

- \ DIMENSION: 1100×700×1095mm
- \ WEIGHT: 117kg
- \ HOUSING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ WORK POWER: 1800W
- \ TANK CAPACITY: 250L
- \ PRESSURE RANGE: 0.5-1.1MPa
- \ PUMP OUTPUT: 15L/min
- \ CONTROL: DMX
- \ WORK TEMP.: -20 – 50°C





Product Video

## uFlamer®

- \ Fluid driven vertical flamer original designed by SHOWVEN®
- \ Effects up to 8-10m (no wind)
- \ Built-in pump, plug and play system
- \ Stainless steel housing, reliable and durable
- \ IPX3 waterproof design
- \ Built-in 5L fuel tank, Support external tank
- \ Safety lock with switchable test mode, safer for service
- \ Tilt protection, the tilt sensor will be activated when machine slant Over 45°
- \ Intelligent control system, safer for use
- \ Standard DMX control, compatible with all DMX console
- \ Machine running status monitoring with SHOWVEN® host controller
- \ Built-in battery design (Optional, and customer can buy battery locally)

### SPECIFICATIONS

- \ DIMENSION: 330×260×320mm
- \ WEIGHT: 14kg
- \ CASING MATERIAL: 304 stainless steel
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 300W
- \ FLAME HEIGHT: 8-10m (no wind)
- \ FUELS: ISOPAR G, H, L, M; ISOPROPANOL
- \ FUEL TANK CAPACITY: 5.0L
- \ EFFECT DIRECTION: Vertical
- \ IGNITION: Dual High Voltage Electron Ignition
- \ BUILT-IN BATTERY DESIGN: Yes, Battery optional
- \ WATERPROOF LEVEL: IPX3
- \ CONTROL: DMX
- \ INTERFACE: Neutrik® powerCON TRUE1 IN/OUT, Waterproof 3-pin and 5-pin XLR IN/OUT







Product Video

## CIRCLE FLAMER X-F1800

- \ Fluid driven flamer system with 210° swiveling angles
- \ Up to 88 preset firing sequences
- \ Nozzle front design, safer for operator
- \ Safety lock with switchable test mode
- \ Stainless steel nozzle, reliable and durable
- \ Double electromagnetic valves design for additional safety
- \ Double pump ensure stable pressure
- \ Fitted with igniter signal interface, compatible with fireworks firing system
- \ Neutrik® powerCON TRUE1 in/out, Neutrik® 3-pin & 5-pin DMX in/out
- \ Compatible with SHOWVEN® original host controller

### SPECIFICATIONS

- \ MODEL: X-F1800
- \ DIMENSION: 590×360×370mm
- \ WEIGHT: 30kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 380W
- \ CONTROL: DMX, Pyro
- \ INTERFACE: Neutrik® powerCON TRUE1 IN/OUT  
Neutrik® 3-pin & 5-pin XLR IN/OUT  
9V-60V Fireworks igniter signal port
- \ FLAME HEIGHT: up to 8-10m (no wind)
- \ ROTATE ANGLES: 210°(±105°)
- \ FUEL: ISOPAR-G, H, L, M; ISOPROPANEL
- \ FUEL TANK CAPACITY: 10L
- \ FUEL CONSUMPTION RATE: 60ml/s
- \ EXT. BATTERY POWERED: YES



SHOWVEN®



Product Video

## CIRCLE FLAMER X-F3600

- \ Original innovation introduced by SHOWVEN®
- \ Never seen flame effects up to 3 rotation cycles
- \ Full cycle and half cycle mode switchable
- \ Up to 182 preset firing sequences
- \ Nozzle front design, safer for operator
- \ Stainless steel nozzle, reliable and durable
- \ Safety lock with switchable test mode
- \ Double electromagnetic valves design for additional safety
- \ Double pump ensure stable pressure
- \ Fitted with igniter signal interface, compatible with fireworks firing system
- \ Neutrik®powerCON TRUE1 in/out, Neutrik®3-pin & 5-pin DMX in/out

### SPECIFICATIONS

- \ MODEL: X-F3600
- \ ROTATION MODE: FULL CIRCLE MODE/HALF CIRCLE MODE
- \ DIMENSION: 640×360×370mm
- \ WEIGHT: 30kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 380W
- \ CONTROL: DMX, Pyro
- \ INTERFACE: Neutrik®powerCON TRUE1 IN/OUT  
Neutrik® 3-pin& 5-pin XLR IN/OUT  
9V-60V Fireworks igniter signal port
- \ FLAME HEIGHT: up to 8-10m (no wind)
- \ ROTATE ANGLES: 1080° (up to 3 cycles)
- \ FUEL: ISOPAR-G, H, L, M; ISOPROPANEL
- \ FUEL TANK CAPACITY: 10L
- \ FUEL CONSUMPTION RATE: 60ml/s
- \ EXT. BATTERY POWERED: YES





Product Video

## SMOKEJET

## SONICBOOM® X

- \ Instant smoke generation, close to CO<sub>2</sub> Jet
- \ No need of CO<sub>2</sub> tank, safer and easy carry
- \ No generation of CO<sub>2</sub>, environmental friendly
- \ Super long stable effects time, upto 12min after fill up
- \ Super fast smoke dissipate with original fluid
- \ Cost effective consumables
- \ Excellent heating module design, fast temp. recovery
- \ Low power mode (220V version), lower power supply requirement
- \ Unique constant pressure system, consistent smoke effect
- \ Pipeline integration technology, easy maintenance, stronger burst
- \ 35pcs 5W LED, independent smoke column color change
- \ Easy installation at any angles even place upside down

### SPECIFICATIONS

- \ MODEL: SONICBOOM® X
- \ DIMENSION: 482×408×215mm
- \ WEIGHT: 17.2kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ FUSE: 15A/250V
- \ POWER: 3000W/1500W(220V), 2000W(110V)
- \ LED POWER: 5W×35pcs
- \ MAX OUTPUT DISTANCE: 10m
- \ MAX CONTINUOUS OUTPUT DURATION: 8s
- \ SMOKE OUTPUT: 55000cuft/min
- \ TANK CAPACITY: 2.5L
- \ FLUID CONSUMPTION RATE: 5min/L
- \ DMX CHANNELS: 1/11
- \ CONSUMABLES: FX-S





Product Video

## SMOKEJET

## SONICBOOM® PLUS

- \ Dual smoke generation system, dual output
- \ Two units can combined together to generate max effects
- \ No need of CO<sub>2</sub> tank, safer and easy carry
- \ No generation of CO<sub>2</sub>, environmental friendly
- \ Super long stable effects time after fill up
- \ Cost effective consumables
- \ Excellent heating module design, fast temp. recovery
- \ Low power mode design, lower power supply requirement
- \ Unique constant pressure system, consistent smoke effect
- \ Pipeline integration technology, easy maintenance, stronger burst
- \ 38pcs 9W LED, independent smoke column color change
- \ Easy installation at any angles even place upside down

### SPECIFICATIONS

- \ MODEL: SONICBOOM®PLUS
- \ DIMENSION: 500×324×325mm
- \ WEIGHT: 28kg
- \ VOLTAGE: 220V/110V,50/60Hz
- \ FUSE: 15A/250V(220V),18A/250V(110V)
- \ POWER: 3000W/1800W(220V),2400W/1800W(110V)
- \ LED POWER: 9W×38pcs
- \ MAX OUTPUT DISTANCE: 10m
- \ MAX CONTINUOUS OUTPUT DURATION: 10s
- \ OUTPUT: 80000cuft/min
- \ FLUID CONSUMPTION RATE: 3min/L
- \ TANK CAPACITY: 5L
- \ DMX CHANNEL: 1/11/14
- \ CONSUMABLES: FX-S





Product Video

## LOW FOG GENERATOR

### Creepers AQ mini

- \ Water based, no need of dry ice
- \ Compact yet robust fog output
- \ Low-water sensor
- \ Adjustable fog density and fan speed
- \ 2L fluid tank, 6.5L water tank
- \ User friendly LCD control panel
- \ Wireless remote control
- \ Molded enclosure, lighter, durable as well as rustless
- \ Built-in water tank, support external large water tank
- \ Latest rapid heating technology, 1-2min heating up time
- \ Patented fog leakage prevention technology, no fog leakage even refill the machine when it is working

#### SPECIFICATIONS

- \ MODEL: Creepers AQ mini
- \ DIMENSION: 460×300×324 mm
- \ WEIGHT: 15kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 2000W
- \ HEAT UP TIME: 1-2min
- \ MAX FOG OUTPUT: 10000cuft/min
- \ FOG FLUID TANK CAPACITY: 2L
- \ MAX. FLUID CONSUMPTION: Appr.32ml/min
- \ WATER TANK CAPACITY: 6.5L
- \ MAX. WATER CONSUMPTION: Appr.250ml/min
- \ INTERFACE: 3-PIN XLR
- \ CONTROL: DMX, 2 channel; Remote control
- \ CONSUMABLES: FX-M Fog Fluid, Water





Product Video

## LOW FOG GENERATOR

### Creeper AQ

- \ Water based, no need of dry ice
- \ Advanced auto water refill system
- \ 30 heads atomizers, thicker fog output
- \ Latest rapid heating technology, 1-2min heating up time
- \ Low-water sensor
- \ Weather proof design
- \ Abrasion-resistant silent caster
- \ Molded enclosure, lighter, durable as well as rustless
- \ Adjustable fog density, moisture and fan speed, versatile application to meet different requirements
- \ Patented fog leakage prevention technology, no fog leakage even refill the machine when it is working

#### SPECIFICATIONS

- \ MODEL: Creeper AQ
- \ DIMENSION: 805×390×480mm
- \ WEIGHT: 35kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 2000W
- \ HEAT UP TIME: 1-2min
- \ MAX FOG OUTPUT: 15000cuft/min
- \ FOG FLUID TANK CAPACITY: 3.3L
- \ MAX. FLUID CONSUMPTION: Appr.32ml/min
- \ WATER TANK CAPACITY: 24L
- \ MAX. WATER CONSUMPTION: Appr.375ml/min
- \ FULLY LOADED OUTPUT TIME: 100+ min
- \ INTERFACE: 3-PIN & 5-PIN XLR
- \ CONTROL: DMX 2/3 channel; Remote control
- \ CONSUMABLES: FX-M fog fluid, Water





Product Video

## LOW FOG GENERATOR

### Creeper AQ PLUS

- \ Water based, no need of dry ice
- \ Advanced auto water refill system
- \ 40 heads atomizers, thicker fog output
- \ Low-water sensor
- \ Weather proof design
- \ Abrasion-resistant silent caster
- \ Molded enclosure, lighter, durable as well as rustless
- \ Latest rapid heating technology, 1-2min heating up time
- \ Adjustable fog density, moisture and fan speed, versatile application to meet different requirements
- \ Patented fog leakage prevention technology, no fog leakage even refill the machine when it is working

#### SPECIFICATIONS

- \ MODEL: Creeper AQ PLUS
- \ DIMENSION: 950×500×540mm
- \ WEIGHT: 48kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ POWER: 2500W
- \ HEAT UP TIME: 1-2min
- \ MAX FOG OUTPUT: 20000cuft/min
- \ FOG FLUID TANK CAPACITY: 3.3L
- \ MAX. FLUID CONSUMPTION: Appr.32ml/min
- \ WATER TANK CAPACITY: 35L
- \ MAX. WATER CONSUMPTION: Appr.500ml/min
- \ FULLY LOADED OUTPUT TIME: 100+min
- \ INTERFACE: 3-PIN & 5-PIN XLR
- \ CONTROL: DMX 2/3 channel; Remote control
- \ CONSUMABLES: FX-M fog fluid, Water





Product Video

## CREEPER ICE

- \ Molded enclosure, compact, durable and rustless.
- \ Water spray design, fast on/off, ice saving
- \ No mechanical lifting structure, better stability
- \ Larger reservoir (15kg ice/55L water)
- \ Continuously variable fog output adjustment
- \ Meet different application scenario
- \ Water tank and ice basket separate design, multi time use with single ice feeding
- \ DMX512 control
- \ Dual heating system, 3000w and 6000w switchable
- \ Abrasion-resistant silent caster
- \ Easier residual water drainage
- \ Rain-proof structure

### SPECIFICATIONS

- \ MODEL: CREEPER ICE
- \ DIMENSION: 492x584x760mm
- \ WEIGHT: 35kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ FUSE: Breaker 20A
- \ WORK POWER: 3000W/6000W (230V) 1600W/3200W (120V)
- \ HEATING UP TIME: Appr. 30min @6000W Appr. 50min @3200W
- \ DRY ICE CAPACITY: 15kg
- \ WATER TANK CAPACITY: 55L
- \ DMX-512: yes
- \ WIRELESS CONTROL: yes
- \ OUTPUT VOLUME ADJUSTMENT: 50%-100%
- \ MAX. COVERAGE AREA: Appr. 500m<sup>2</sup>
- \ CUMULATIVE OUTPUT TIME: 5-10min
- \ CONSUMABLE: Dry ice, Water







Product Video

## CREEPER ICE PLUS

- \ Molded enclosure, lighter, durable and rustless.
- \ Water spray design, fast on/off, ice saving
- \ No mechanical lifting structure, better stability
- \ Huge reservoir (30kg ice/ 75L water)
- \ Water tank and ice basket separate design, multi time use with single ice feeding
- \ Continuously variable fog output adjustment
- \ Meet different application scenario
- \ Dmx512 control
- \ Triple heating system, 3000w and 9000w switchable
- \ Abrasion-resistant silent caster
- \ Easier residual water drainage
- \ Rain-proof structure
- \ Dual output nozzle, faster fog spread

### SPECIFICATIONS

- \ MODEL: CREEPER ICE PLUS
- \ DIMENSION: 642×584×887mm
- \ WEIGHT: 45kg
- \ VOLTAGE: 220V/110V, 50/60Hz
- \ FUSE: Breaker 3P 20A
- \ WORK POWER: 3000W/9000W (230V) 1600W/4800W (120V)
- \ HEATING UP TIME: Appr. 40min @9000W Appr. 70min @4800W
- \ DRY ICE CAPACITY: 30kg
- \ WATER TANK CAPACITY: 75L
- \ DMX-512: yes
- \ WIRELESS CONTROL: yes
- \ OUTPUT VOLUME ADJUSTMENT: 50%-100%
- \ MAX. COVERAGE AREA: Appr. 800m<sup>2</sup>
- \ CUMULATIVE OUTPUT TIME: 5-10min
- \ CONSUMABLE: Dry ice, Water





Product Video

## PRO FOG MACHINE

### X-S3000

- \ Build-in LCD screen, user friendly
- \ Neutrik®powerCON, 3-pin and 5-pin DMX connectors
- \ Rotary output control button, convenient smoke amount adjustment
- \ Super long effect time, max output up to 40s, continuously in low output mode
- \ Optimized atomizer with high precision circuit, ensure more uniform smoke effect

#### SPECIFICATIONS

- \ MODEL: X-S3000
- \ DIMENSION: 660×404×290mm
- \ WEIGHT: 16.6kg
- \ POWER: 3000W(220V), 2000W(110V)
- \ FOG OUTPUT: 40000cuft/min
- \ TANK CAPACITY: 9L
- \ DMX CHANNELS: 1 channel
- \ OUTPUT DURATION: 40s(Max output) Continuously (Low output)



## PRO FOG MACHINE

### P-S1500

- \ Smart yet robust fog output
- \ Stable performance, reliable and durable
- \ Optimized atomizer with high precision circuit, ensure more uniform smoke effect
- \ Wireless control adopts redundancy technology, better anti-interference ability
- \ Flexible group shooting with original remote control
- \ Neutrik®powerCON and DMX connectors
- \ Build-in LCD screen, user friendly

#### SPECIFICATIONS

- \ MODEL: P-S1500
- \ DIMENSION: 500×315×260mm
- \ WEIGHT: 13kg
- \ POWER: 1500W
- \ MAX OUTPUT DISTANCE: 7m
- \ FOG OUTPUT: 30000cuft/min
- \ TANK CAPACITY: 3L
- \ DMX CHANNELS: 1 channel





## HOST CONTROLLER

- \ Extremely simple design, easy operation
- \ Exclusive RDMX function, remote monitoring of machine status
- \ Built-in special effects mode
- \ Built-in battery, 5-8h battery life
- \ Support SPARKULAR®, CIRCLE FLAMER and SONICBOOM®
- \ DMX 512

### SPECIFICATIONS

- \ MODEL: ZK6200/ZK6300
- \ DIMENSION: 390×300×110mm
- \ WEIGHT: 3.5kg
- \ VOLTAGE: 100-240V, 50/60Hz
- \ POWER: 15W
- \ MAX CASCADE OF SPARKULAR®: 18units (ZK6200)/ 54units (ZK6300)
- \ SUPPORT MACHINES: SPARKULAR® series, CIRCLE FLAMER series, SONICBOOM® series



## HC8200

- \ No smoke, no pyro smell
- \ Granulated powder, non-hazmat storage
- \ DGM tested, can be shipped by air/sea
- \ RoHS certified, environmental friendly
- \ Aluminum foil bag vacuum packaging, long shelf life



HC8200 type	Weight/bag	Package	Support model	
HC8200 MEDIUM	50g/bag	12bags/box 48boxes/carton	SPARKULAR® mini	
HC8200 LARGE				
HC8200 MEDIUM	200g/bag	12bags/box 12boxes/carton	SPARKULAR®, SPARKULAR® II, FALL, miniFALL, Cyclone, PRO, SPIN, JET	
HC8200 LARGE				
HC8200 LARGE I				SPARKULAR® FALL, Cyclone, PRO
HC8200 LARGE II				SPARKULAR® FALL, Cyclone
HC8200 LARGE III				SPARKULAR® Cyclone

## FOG FLUID


- \ Ready to use
- \ Environmental friendly
- \ In compliance with RoHS
- \ High quality, compatible with SHOWVEN® series machines

Product Name	FX-S PRO QUICK DISSIPATING FOG FLUID
Package	3Lx4 /carton
Support Model	SONICBOOM®X / SONICBOOM® PLUS
Description	Quick dissipating



Product Name	FX-M PRO MEDIUM FOG FLUID
Package	3Lx4 /carton
Support Model	X-S3000, P-S1500, CREEPER AQ series
Description	Medium fog fluid



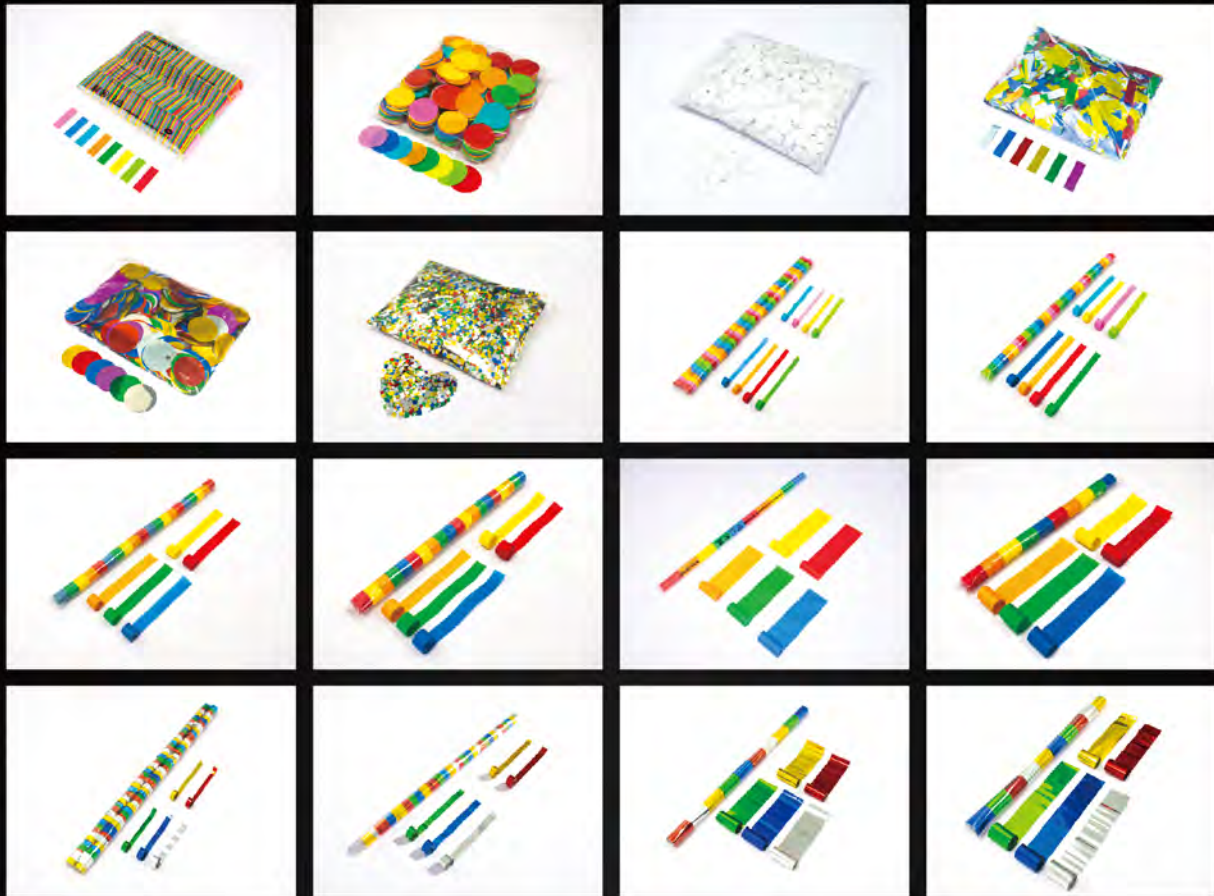

- \ Factory direct supply
- \ Standardized production workshop
- \ Premium quality
- \ Multi colors and shapes
- \ Flameproof and colorfast
- \ Accept customization

## SPECIFICATIONS

### \ CONFETTI SHAPE:

Rectangle, Round, Square, Heart, Butterfly etc. size customizable

### \ STREAMER SIZE:

0.82cm\*5m (100pcs/bag), 1.5cm\*10m (32pcs/bag), 2.5cm\*10m (20pcs/bag), 5cm\*10m (10pcs/bag), 2.5cm\*20m (20pcs/bag), 5cm\*20m (10pcs/bag).

### \ MATERIAL:

Tissue paper, Metallic PVC

### \ COLORS:

TISSUE PAPER: Multicolor, White, Pink, Blue, Light blue, Orange, Green, Light green, Yellow, Red etc.  
Metallic PVC: Multicolor, Gold, Red, Blue, Purple, Green, Silver etc.

# SHOWVEN®



Showven Technologies Co., Ltd.

Tel: +86-731-83833068

Web: [www.showven.cn](http://www.showven.cn) E-mail: [info@showven.cn](mailto:info@showven.cn)

Add: No.1 Tengda Road,

Liuyang Economic & Technical Development Zone, 410300, Changsha,  
Hunan, P.R.China