

(F



FREEDOM NUT PLATE SET M10



Admiral Staging www.admiralstaging.com +31 534 301 201

the Netherlands

SCOPE

The nut plate set is used to connect a clamp or coupler directly to the length profile.



Inspect this product before use. In case of material defects, this product should be taken out of service.

MAINTENANCE

Please do not use aggressive cleaning agents such as solvents and/or corrosive substances. Clean the product with a cloth with a soft detergent.

After cleaning the product, dry it with a soft cloth. Check the product for worn, tear and/or lost items.


WARNING

By wear and/or missing of the proper components this product should be immediately taken out of service. Consult your supplier for advise.


Repair / maintenance is only permitted by a qualified person. In case of doubt, consult your supplier.

CONTENT

- 1 x PART nutplate top M10
- 2 x M10x 55 six sided bolt 8.8 black
- 3 1 x Lifting eye WLL 230kg M10 internal black
- 4 1x M10x 25 Hexagon socket bolt for halfcoupler
- I x M10 nut nyloc black
- I x M10 wing nut D316 black



USE




O

Connect the clamp or coupler (not included) to the nut plate set.

Make sure a clamp or coupler is used with appropriate Safety factor for the intended use. Tighten with a torque wrench.

ื่อ

Connect a Safety set (provided with all Freedom nutplate sets) at the top by using a bolt.

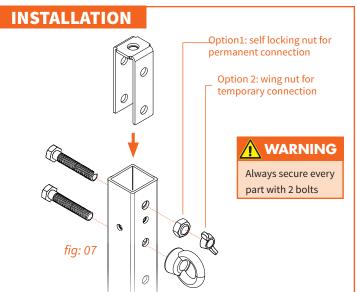

In case of assembling a "Single rigger" connect two Nutplate sets, at the top and bottom of the profile. When assembling a "Down rigger", connect the Nut plate set at the top of the profiles.

Choose your nuts depending on the use, permanent (option 1) or temporary (option 2). Tighten the self-locking nuts in such a way that three threads of the bolt are visible from the nut.



Download and read the full manual about our Freedom System before use: admiralstaging.com