


CLASSIC SERIES POWER CONDITIONERS (20 AMP)



Furman brings together superior protection and outstanding performance in a sturdy, rack-mountable design. Classic Series Power Conditioners feature Series Multi-Stage Protection (SMP), Linear Filtering Technology (LiFT), Extreme Voltage Shutdown (EVS), and offer a new industrial design and full feature set engineered specifically for the A/V professional.

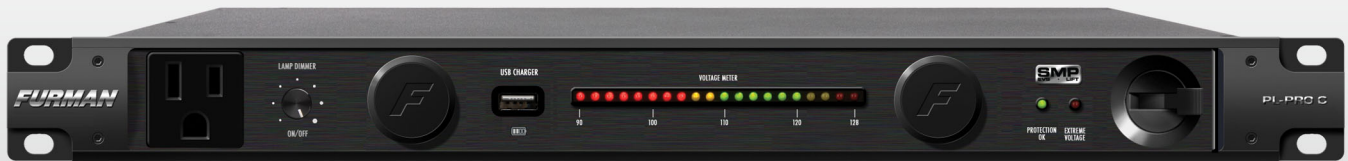

PL-PRO C FEATURES



PL-PRO DMC FEATURES




PL-PRO REAR PANEL (ALL MODELS)

ALL PL PRO UNITS FEATURE FURMAN'S "SECURE STRAPS" WALL WART LOCKING SYSTEM.



THE POWER OF **FURMAN** TECHNOLOGY


ALL CLASSIC MODELS FEATURE




DUAL SMOOTH TRACK RETRACTABLE LED LIGHTS
ILLUMINATE EQUIPMENT IN YOUR RACK




LED STATUS INDICATORS WARN YOU WHEN VOLTAGE IS OUTSIDE OF NOMINAL RANGE OR WHEN PROTECTION HAS BEEN COMPROMISED




ISOLATED OUTLET BANKS MINIMIZE INTER-COMPONENT INTERFERENCE AND NOISE CONTAMINATION



THREE WIDELY SPACED OUTLETS ACCOMMODATE BULKY AC POWER TRANSFORMERS



REAR PANEL BNC CONNECTOR POWERS ANY STANDARD GOOSENECK LAMP FOR REAR RACK ILLUMINATION
(Lamp Sold Separately)




LIFT OFFERS LINEAR AC POWER FILTERING TO ENSURE CLEAN POWER FOR UNEQUALED AUDIO & VIDEO CLARITY



FURMAN'S EXCLUSIVE SMP TECHNOLOGY PROVIDES THE HIGHEST LEVEL OF SURGE & SPIKE PROTECTION AVAILABLE




ADVANCED EVS CIRCUITRY DETECTS DANGEROUS VOLTAGE IRREGULARITIES AND SAFELY POWERS DOWN ITSELF AND CONNECTED EQUIPMENT IN UNSAFE CONDITIONS



NINE TOTAL OUTLETS (8 REAR PANEL OUTLETS AND ONE FRONT PANEL CONVENIENCE OUTLET)




20 AMP RATING FEATURING A HIGH INRUSH MAGNETIC CIRCUIT BREAKER FOR ADDED PROTECTION




FRONT PANEL CONVENIENCE CHARGER ALLOWS YOU TO CHARGE MOST MEDIA DEVICES OR POWER A USB LAMP

PL-PRO C FEATURES:



SEGMENTED LED VOLTMETER MONITORS AND DISPLAYS INCOMING LINE VOLTAGE

PL-PRO DMC FEATURES:



LARGE DIGITAL VOLTMETER/AMMETER WITH DISCRETE DIMMER BUTTON DISPLAYS LINE VOLTAGE AND TRUE RMS CURRENT DRAW

CLASSIC SERIES REAR PANEL



CLASSIC SERIES SPECIFICATIONS

MAXIMUM OUTPUT CURRENT:
20 AMPS

LINE CORD:
CAPTIVE 3/12 AWG, 10 FT BLACK CORD WITH NEMA 20 PLUG

PULL OUT LIGHTS:
TWO MULTI-LED, DIMMABLE LAMPS

BNC SOCKET W/SWITCH:
REAR RACK LAMP, 12VAC 500MA MAX (LAMP NOT INCLUDED)

OPERATING VOLTAGE:
90 TO 139 VAC

OVER VOLTAGE SHUTDOWN:
140 VAC NOMINAL

SPIKE PROTECTION MODES:
LINE TO NEUTRAL, ZERO GROUND LEAKAGE

SPIKE CLAMPING VOLTAGE:
188 VAC PEAK @3,000 AMPS

RESPONSE TIME:
1 NANOSECOND

MAXIMUM SURGE CURRENT:
6,500 AMPS

NOISE ATTENUATION:
10 DB @ 10KHZ, 40 DB @ 100KHZ, 50 DB @500 KHZ

DIMENSIONS:
19" W x 10.5" D x 1.75" H

WEIGHT:
12 LBS.

POWER CONSUMPTION:
12 WATTS