




Visit product page

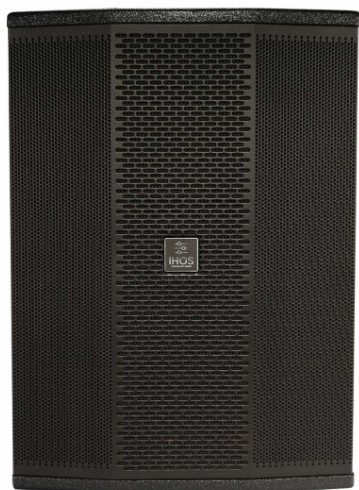

## MILOS SUB

L005685

Plywood professional active band pass subwoofer 12 inch , German engineering D class amplifier,700w RMS, 124 dB Spl, 1XLR input ,1 XLR output , lcd screen and multiple DSP ,X over design for satellite, Frequency response 40-120HZ.

### TECHNICAL DETAILS

#### Technical Specifications

Inputs: 1x XLR.

Outputs: 1x XLR link or Xover.

Power output: 700 Watt RMS.

Volume Control.

Power input: 220 - 240 Volt AC, 50 / 60 Hz.

German Engineering Class D amplifier + switching power design.

LED power / signal / clip indicator.

Xover design for satellite (90 Hz or 120 Hz).

Phase switchable (0/180).

LCD with multiple DSP (Digital Signal Processing).

Active bandpass subwoofer.

Frequency response: 40 - 120 Hz.

Impedance: 8 Ohm.

Max output SPL (1m): 124 dB / 1m

Driver: 12" Subwoofer, 3" vc 84 Oz.

Plywood with black painted finish cabinet.

1,2 mm steel mesh.

M20 screw pole.

Dimensions: 63 x 49 x 63,5 cm

Packing Dimensions: 65 x 51 x 65,5 cm

Weight: 32 Kg.

## PHOTOS




## PRODUCT VIDEO





iCover Milos Sub  
Cover For Milos SUB



[www.fos-lighting.eu](http://www.fos-lighting.eu)

