



Visit product page



CLIMATE PRO PEARL

L005789

Column in/Out-Door professional passive speaker, mdf white housing, 4x4" inch woofer, 1x1" HF driver, 200w RMS, 95 dB Spl, 2 way passive, 8ohm, Frequency range 80-20kHz, quick install bracket included.

TECHNICAL DETAILS

Technical Specifications

Two way passive column speaker.

Sensitivity (1m/1w): 95 dB.

Frequency range: 80 - 20 kHz.

Nominal impedance: 8 Ohms.

Power handling: 200W RMS.

LF: 4x 4" woofers.

HF: 1x 1" HF driver.

MDF cabinet with black or white painted finish.


Steel mesh.

Dimensions: 66 x 15 x 14,5 cm (without the mounting bracket). 24,5 cm depth, with the mounting bracket in vertical position).


Package dimensions: 77,5 x 30,5 x 26 cm (1 piece).

Gross weight: 9 Kg.

PHOTOS

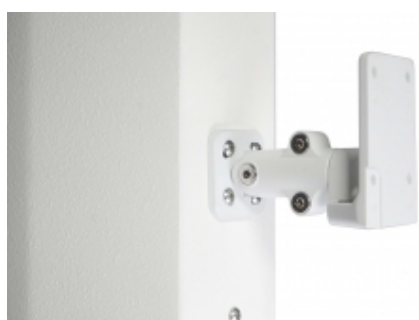

PRODUCT VIDEO



www.fos-lighting.eu

