



Visit product page



GO 26

L005836

Superior live-stage dynamic super cardioid microphone, engineered to perform under pressure, reduced handling noise, maximum gain before feedback, 50Hz-15KHz, , dimensions 51.3 x 169.8mm, sensitivity -73dBV/ibar, impedance 300Ω, 231gr.

TECHNICAL DETAILS

Technical Specifications

Type: Dynamic

Polar Pattern: Super-cardioid


Frequency Response: 50Hz~15,000Hz

Impedance: 300Ω ± 30%

Sensitivity: -73 ± 3dBV/ibar

Dimension (mm): ø51.3 x 169.8

Weight (without cable): 231± 10g

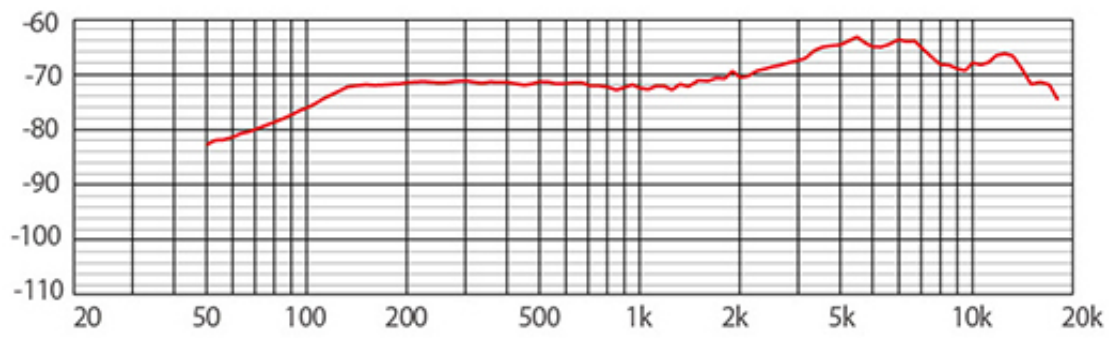

PHOTOS



PRODUCT VIDEO





www.fos-lighting.eu

