


## CABLE TYPE: FBS125 DUPLEX FIBER CONNECTION CABLE ST/PC

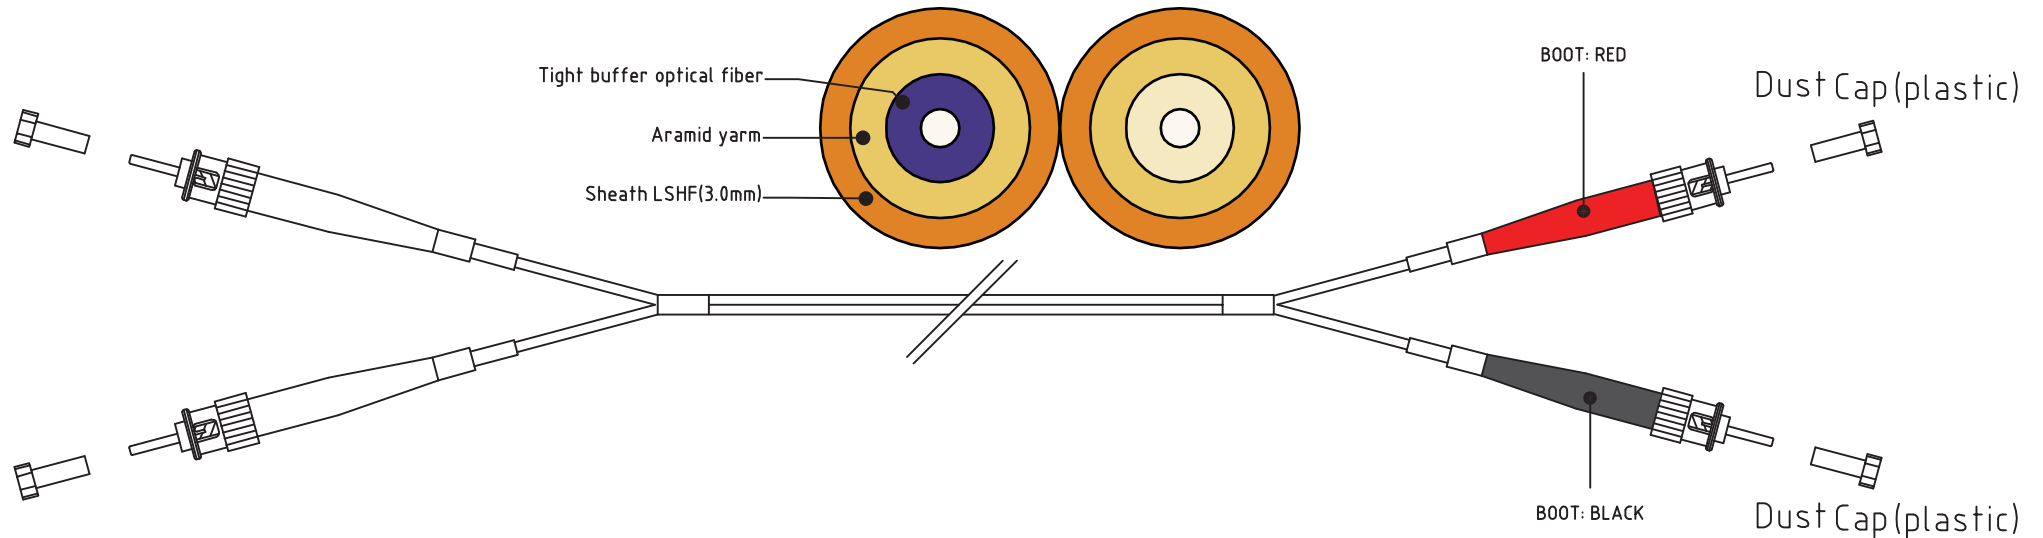

### AVAILABLE LENGTHS

FBS125/1 - 1M	FBS125/15 - 15M	FBS125/60 - 60M
FBS125/2 - 2M	FBS125/20 - 20M	FBS125/70 - 70M
FBS125/3 - 3M	FBS125/30 - 30M	FBS125/80 - 80M
FBS125/5 - 5M	FBS125/40 - 40M	FBS125/90 - 90M
FBS125/10 - 10M	FBS125/50 - 50M	FBS125/100 - 100M

1. CONNECTORS : ST/UPC M/M BOOT
2. CABLE TYPE: DUPLEX MULTIMODE 62.5/125uM INDOOR 3.0mm
3. INSERTION LOSS(IL):  $\leq 0.30$ dB
4. RETURN LOSS(RL):  $MM \leq 40$ dB  $MM \geq 35$ dB
5. MAXIMUM ATTENUATION: 3.5/1.5 dB/km (850/1300)  
MIN BENDING RADIUS: 4cm (LOADED), 2cm (UNLOADED)
6. MIN BANDWIDTH: 200/500 MHZ.Km
7. OPERATING TEMPERATURE: -20°C to +70°C
8. STORAGE TEMPERATURE: -40°C to +70°C
9. STANDARDS: TIA/EIA-568B.3 ,BELLCORE GR-409

