

# PGA31 PERFORMANCE HEADSET CONDENSER MICROPHONE

## OVERVIEW

The PGA31 performance headset microphone for general, speaking and performance use is a permanently-biased electret condenser microphone. Engineered to provide maximum versatility and reliable performance in a wide array of conditions at an affordable price, the PGA31 is compatible with any Shure wireless bodypack systems with TA4F (TQG) connectors. Available as an included option for many systems, it also makes a viable replacement option for use in existing systems. The wearable design offers improved comfort and a secure fit for hands-free operation in any situation, while the unidirectional (cardioid) pickup pattern provides excellent off-axis rejection for higher gain-before-feedback when using a stage monitor.

## FEATURES

- Wearable wireframe headset fits securely for multi-instrumentalists and active performers
- Permanently charged electret condenser element for detailed, crisp vocals
- Unidirectional (cardioid) polar pattern rejects unwanted noise for improved sound quality and higher gain-before-feedback
- Flexible gooseneck design and discrete adjustment options optimize microphone positioning for further source isolation
- TA4F (TQG) connector seamlessly integrates with existing Shure bodypack systems
- Also available with a wide variety of Shure wireless systems, renowned for ease of use and reliable performance
- Included windscreen tames plosive, breath and wind noise for clean and intelligible sound
- Tailored frequency response primed for great sound on vocals
- Legendary Shure precision engineering for durability and performance



## AVAILABLE MODELS

PGA31-TQG	Headset Cardioid Condenser Microphone with Windscreen
BLX1288/PGA31	BLX Dual-Channel Wireless Vocal/Headset Combo System
BLX14/PGA31	BLX Wireless Headset System
BLX14R/P31	BLX Rack-Mounted Wireless Headset System

## SPECIFICATIONS


Type	Electret Condenser
Frequency Response	60 Hz – 20 kHz
Polar Pattern	Unidirectional (Cardioid)
Output Impedance	600 $\Omega$
@ 1 kHz, typical	
Audio Output Level	-50 dBV/Pa
Signal-To-Noise Ratio <sup>[1]</sup>	66 dB
@ 1 kHz	
Maximum SPL <sup>[1]</sup>	145.0 dB
1000 $\Omega$ load, @ 3% THD	
Dynamic Range <sup>[1]</sup>	117.0 dB
@ 1 kHz, 1000 $\Omega$ load	
Equivalent Output Noise <sup>[1]</sup>	28 dB
Typical, A-Weighted	
Power Requirements	+5 V DC (nominal), 10 V maximum (DC bias)
Polarity	Positive pressure on diaphragm produces positive voltage on pin 3 with respect to pin 1
Cable	1.3 m (50 in.)
Connector	TA4F
Net Weight	45 g (1.59 oz.)

<sup>[1]</sup>Measurements taken using RK100PK preamp set @ 0 dB using 8k bias resistor.

\* All specifications measured with a 48 VDC phantom power supply. The microphone operates at lower voltages, but with slightly decreased headroom and sensitivity.

## OPTIONAL ACCESSORIES

RK377	Replacement kit with clip + 2 foam windscreens
-------	------------------------------------------------

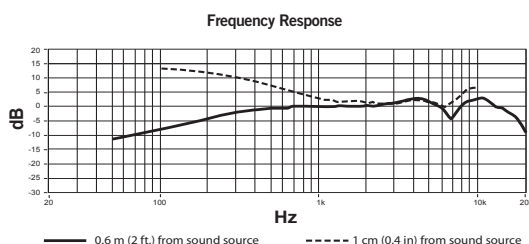

**SHURE**<sup>®</sup>  
LEGENDARY  
PERFORMANCE™

**Europe, Middle East, Africa:**  
Shure Europe GmbH  
Jakob-Dieffenbacher-Str. 12  
75031 Eppingen, Germany

Phone: +49 (0) 7262 92490  
Fax: +49 (0) 7262 9249114  
Email: info@shure.de  
www.shure.eu

**United Kingdom, Ireland:**  
Shure Distribution UK  
Unit 2 The I O Centre  
Lea Road  
Waltham Abbey EN9 1AS  
United Kingdom

Phone: +44 (0) 1992 703058  
Fax: +44 (0) 1992 703057  
Email: info@shuredistribution.co.uk  
www.shure.co.uk

www.shure.eu

© 2014 Shure Incorporated

Whilst every effort has been made to ensure that the information in this document is correct, we accept no liability in respect of errors or omissions. All specifications within this document are subject to change without notice.