

CSS556

Surface mount Ceiling Speaker


AUDAC

► Features

- Solid aluminum housing
- Quick and simple mounting
- Included mounting bracket
- Suitable for various powers
- Conform with EN60849

► Applications

- All kinds of applications where is no possibility to integrate speakers into walls and/or ceilings.

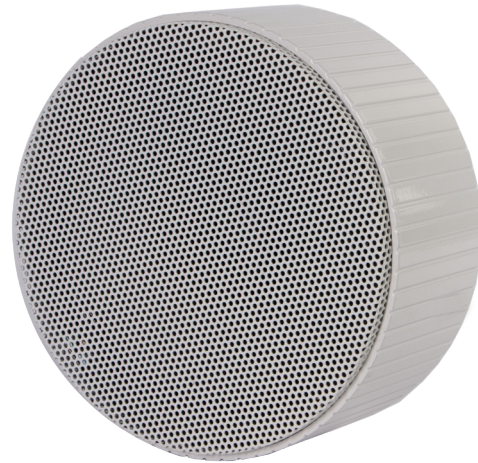

The CS556 is a surface mount ceiling loudspeaker, which is designed to be used in all kinds of applications where is no possibility to integrate speakers into walls or ceilings.

It features a 6" full range loudspeaker which is suitable for background music an announcements, and is fitted with a line transformer with power taps for 6W and 3W.

The housing is made of solid aluminum, with an aluminium front grill and a durable white coating.

The mounting of the speaker is very quick and fast, using the supplied mounting bracket.

Moreover, the CSS556 is conform with EN60849, which is known as the standard for sound systems for emergency purposes.

► Specifications

SYSTEM SPECIFICATIONS	
Max. power	15 W
RMS power	10 W
Power line transformer 1	6 W / 1666 Ohm
Power line transformer 2	3 W / 3333 Ohm
Frequency response -3dB	110 Hz - 18 KHz
Sensitivity	91 ± 3 dB
Impedance	8 Ohm
PRODUCT FEATURES	
Dimensions (Diameter x Depth)	Ø 170 x 79 mm
Weight net	2.4 Kg
Drivers	6" Full Range
Construction	Aluminum
Mounting	2 Screws
Front finish	White aluminum grill
Colour	White
SHIPPING & ORDERING	
Packaging	Carton box
Shipping weight & volume	3 Kg - 0.011 Cbm
Accessory included	Mounting bracket

*AUDAC reserves the right to change specifications without notice: this is part of our policy to continually improve our products