BT-COLORAY 60R

05510

Description

Stylish outdoor 60W RGBW single beam projector for stage, TV-show, exhibition boots and architectural lighting

Features

- This stylish 60W RGBW single beam projector is equipped with a 15° lens making it a very powerful tool for all kinds of events (stage, TV-show, exhibition boots, architectural lighting,…)
- IP65 rating
- Three different DMX-modes: 4, 6 and 7 channels.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, …
- The LCD-display assures easy navigation in the different setup menus.
- TV-Studio ready: flicker free 1200Hz LED refresh rate.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- White balance adjustment to perfectly match the colors of several projectors.
- Default factory settings + user settings can be saved/loaded.
- 5pin DMX in/outputs and Neutrik® TRUE1 PowerCON® in/outputs for easy daisy chaining.
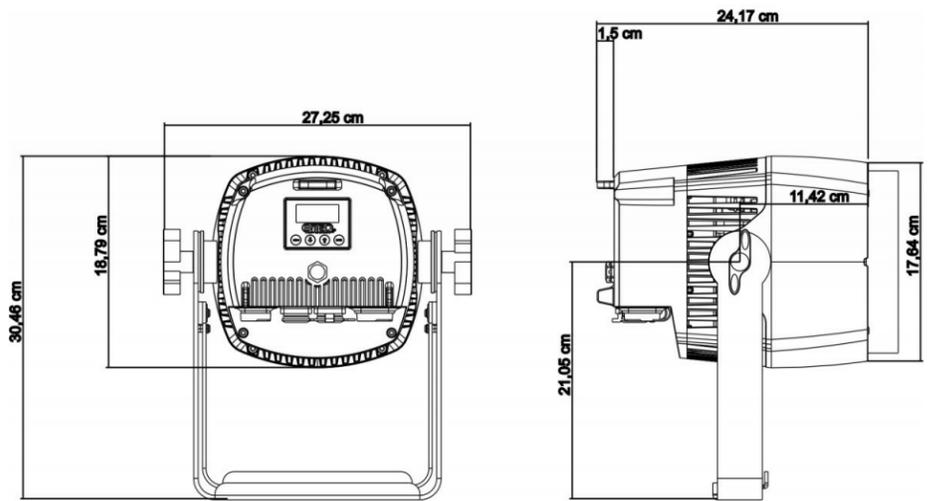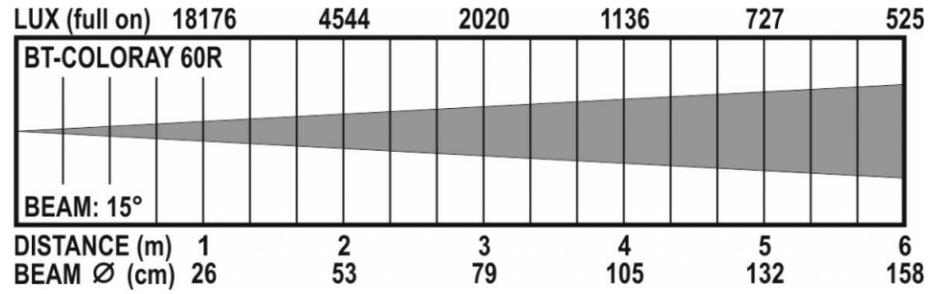- Fan cooling for longer LED life.

SPECIFICATIONS

General : Application	Architectural, Stage & Rental, Theatre
General : Dimensions (cm)	24 x 27 x 30
General : Weight (kg)	5.43
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	70
General : Color	black
General : Display	touchscreen
General : Fixation	optional omega bracket
General : IP rating	outdoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : SMART-DMX	No
Control : Standalone	automatic, fixed
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	7
Light : lamp socket	No
Light : lamp	LED
Light : colors	RGBW
Light : mix colors	Yes
Light : focus	No
Light : zoom	No
Light : iris	No
Light : min. beam angle (°)	15
Light : max. beam angle (°)	15
Light : min. refresh rate (kHz)	No
Light : max. refresh rate (kHz)	No
Connections : input	5 pin XLR, TRUE1 powerCON
Connections : output	5 pin XLR, TRUE1 powerCON
Brand	BRITEQ
EANCode	5420025655101
Discontinued	No

LUX (full on)	18176	4544	2020	1136	727	525
BT-COLORAY 60R						
BEAM: 15°						
DISTANCE (m)	1	2	3	4	5	6
BEAM Ø (cm)	26	53	79	105	132	158