

# HF-HEADSET

B08310

## DESCRIPTION

Lightweight headset condenser microphone with lockable mini-jack for use with the HF-BPACK

## FEATURES

- Lightweight headset condenser microphone with lockable mini-jack (with screw) for use with the HF-BPACK.
- Perfect for presentations, teachers, instructors, ...
- Sensitivity : -  $47 \pm 3$ dB(1.5V,680K $\Omega$ ;0dB=1V/Pa,1KHz)
- Output impedance : Low Impedance (680 $\Omega$ )
- Directivity : Unidirectional
- Microphone Capsule : Condenser
- Frequency Range : 100Hz - 16kHz
- Operation voltage range : 1V - 10V
- Standard operation voltage : 1,5V
- Current consumption : <0,5mA
- Max. input sound pressure level : 110dB
- S/N ratio : >60dB






## TECHNICAL SPECIFICATIONS

<b>General : Series</b>	HF
<b>General : Weight (kg)</b>	0.024
<b>General : Energy Label</b>	No
<b>General : Color</b>	black
<b>Audio : microphone direction</b>	Unidirectional
<b>Brand</b>	JB SYSTEMS
<b>EANCode</b>	5420025683104



## YOUR DEALER

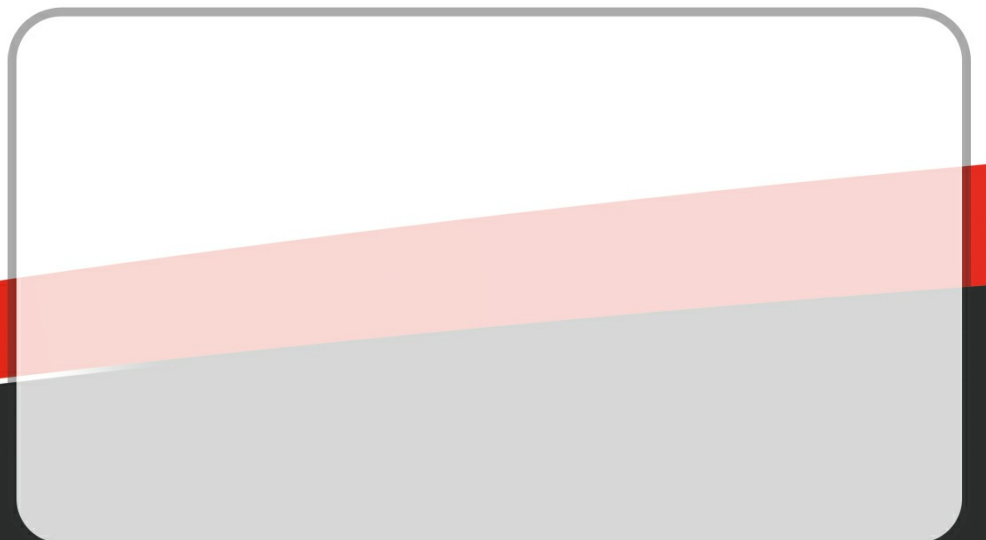

[www.jb-systems.eu](http://www.jb-systems.eu) | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2022 by BEGLEC NV. All rights reserved.

