

## DMX LED strip

HOW TO CONNECT

### Description

#### DMX RGBW LED strip

The 5 m strip is divided into 60 sections, or 12 sections of 8.33 cm per meter. Each section can be controlled using a DMX with 4 channels, via the sequence RGBW. The value W is 6500k, cold white. By default, the first section is accessible using DMX address 1 to 4. The next section is automatically 5-8 and so on, with the last section being 237 to 240. The start address can be adjusted with the DMX tool3, see the schematic !

### Articles

BKL-LSDMX24RGBW100

1 x

€ 79,00

MWL-LRS-100-24

1 x


€ 28,30

WLF-WOLFMIXW1MK2

1 x

€ 775,08

Prices incl. VAT

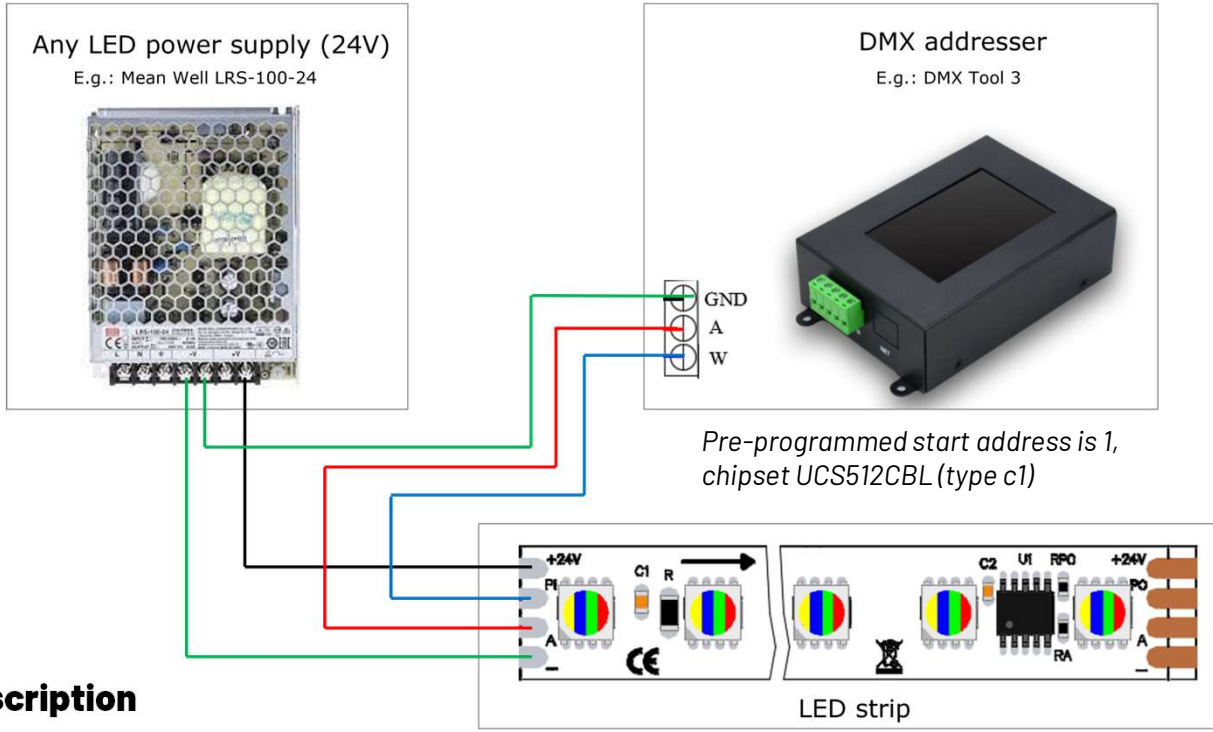

**DMX LED strip**  
HOW TO ADDRESS

**Description**

*DMX RGBW LED strip*  
The 5 m strip is divided into 60 sections, or 12 sections of 8.33 cm per meter. Each section can be controlled using a DMX with 4 channels, via the sequence RGBW. The value W is 6500k, cold white. By default, the first section is accessible using DMX address 1 to 4. The next section is automatically 5-8 and so on, with the last section being 237 to 240. The start address can be adjusted with the DMX tool3, see the schematic!

**Articles**

BKL-LSDMX24RGBW100	1 x	<b>€ 79,00</b>
MWL-LRS-100-24	1 x	<b>€ 28,30</b>
BKL-DMXTOOL3	1 x	<b>€ 160,49</b>

Prices incl. VAT