

marantz




SR5015DAB

Marantz SR5015DAB 7.2ch 8K AV receiver with HEOS Built-in and Voice Control

Packed with the latest audio and video technologies, the SR5015DAB lifts your home entertainment to a new level. Like every Marantz, it pays extra special attention to audio quality, and it creates a highly immersive and richly detailed surround sound experience. With the latest current feedback topology and the Marantz own-developed HDAMs, the SR5015DAB has both the power and the finesse to astonish and astound. Stream music from leading services, listen to DAB+ radio, and experience music in your whole home with HEOS Built-in.

- Performance, power and connectivity to suit your audio preferences: 7.2 channel discrete power amplifier, 180W per channel.
- 8K/60Hz and 4K/120Hz pass-through support for every entertainment need: With the latest technology in HDMI support, enjoy 8K quality video from your 8K source devices or with 8K upscaling from Full HD or 4K sources.
- Support for the most advanced three-dimensional audio formats: Dolby Atmos, Dolby Atmos Height Virtualization Technology, DTS:X and DTS Virtual:X processing are all supported to allow you to listen to immersive, multi-dimensional audio.
- Enhanced Audio Return Channel (eARC) HDMI support: Through the main HDMI output, connect your TV with eARC HDMI support to allow uncompressed and object-based audio formats like Dolby Atmos and DTS:X directly from a smart TV app to your AV receiver.
- The greatest technology for home cinema: Support for the latest HDR formats including HDR10, HDR10+, HLG, Dolby Vision, 4:4:4 colour resolution and BT.2020, as well as Dynamic HDR provides exceptional picture quality for brightness, clarity and contrast.
- Advanced gaming specifications: With 4K/120Hz pass-through, Variable Refresh Rate (VRR), Auto Low Latency Mode (ALLM) and Quick Frame Transport (QFT), experience gaming thrills with amazing imaging and reduced lag.
- High-resolution streaming for audiophile approved sound: Ability to decode ALAC, FLAC and WAV lossless files up to 24-bit/192-kHz; DSD 2.8MHz and 5.6MHz tracks — enjoy your music exactly as the artist intended.
- Exclusive components elevate Marantz sonic signature: Marantz proprietary HDAM circuit boards, Current Feedback circuitry, AKM AK4458 32-bit D/A converters, and Hybrid PLL Clock Jitter Reducer produce more detailed, dynamic sound.
- Features HEOS Built-in and the free HEOS App: Your key to digital music streaming, multi-room audio and voice control throughout your entire home.
- Almost unlimited music sources: Stream from music services like Spotify Free and Premium, Amazon Music HD, Tidal and more, enjoy DAB+ radio, or stream directly from smart devices via AirPlay 2 or Bluetooth.

Modern Musical Luxury

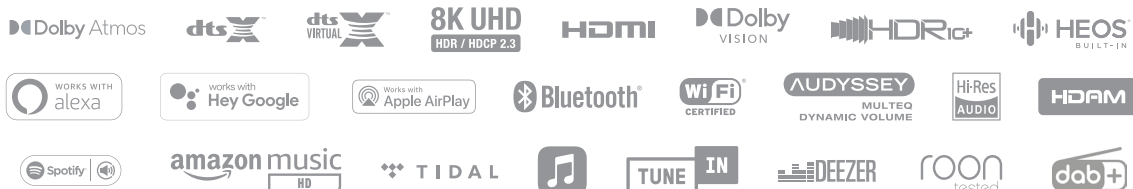

SR5015DAB

Technical Specs



| | | |
|---|--|-----------------------------------|
| Multichannel surround | | |
| DTS HD Master / DTS:X / DTS:X Pro | | • / • / - |
| DTS Neo:X / DTS Neural:X | | - / • |
| DTS Virtual:X | | - |
| IMAX Enhanced | | - |
| Dolby TrueHD / Dolby Atmos / Dolby Atmos Height Virtualization | | • / • / • |
| Dolby ProLogic Iiz / Dolby Surround | | - / • |
| Auro 3D | | - |
| Multichannel Stereo | | • |
| Max Number of Processing (Preamp) Channels | | 7.1 |
| Sound Enhancements | | |
| Discrete Power Amplifier | | 7 |
| Copper Plated Chassis | | - |
| Power Transformer: Toroidal / EI | | EI |
| Current Feedback Topology | | • |
| Hyper Dynamic Amplifier Modules (HDAM) | | • |
| Pure Direct | | - |
| Gold Plated RCA Terminals | | • |
| Clock Jitter Reducer | | - |
| Audyssey | | MultEQ XT |
| Audyssey Dynamic EQ / Dynamic Volume | | • / • |
| Audyssey LFC | | - |
| Compressed Audio Enhancer: MDAX2 | | • |
| Network | | |
| HEOS Multi-room and Streaming | | • |
| Bluetooth Re-transmit for Bluetooth headphones | | • |
| Amazon Alexa / Google Voice Assistant / Apple HomePod | | • / • / • |
| Lossy Formats: MP3 / WMA / AAC | | • / • / • |
| Lossless Formats: FLAC HD 192/24 / WAV 192/24 / ALAC 192/24 | | • / • / • |
| DSD Audio Streaming | | • (2.8/5.6MHz) |
| FLAC HD 192/24 | | • |
| Gapless Playback | | • (FLAC, WAV, ALAC, DSD) |
| AirPlay Audio Streaming | | • (AirPlay2) |
| Internet Radio | | • (Tuneln) |
| Spotify | | • (connect) |
| Amazon Music HD / Deezer / TIDAL / Napster / others | | • / • / • / • / varies per region |
| Compatible with Remote APP for Smart Phones | | Android / iOS |
| Compatible with Remote APP for Tablets | | Android / iOS / Amazon Kindle |
| Ethernet Port | | • |
| Wi-Fi | | • |
| Bluetooth | | • |
| HDMI | | |
| HDMI Inputs: Back / Front | | 6 / 0 |
| HDCP2.3 support | | • |
| HDMI Outputs: Main / Zone | | 2 / - |
| Video Conversion Analogue -> HDMI | | • |
| HDMI to HDMI scaling | | up to 8K 60/50Hz |
| 8K/60Hz / 4K/120Hz / CEC / eARC | | • / • / • / • |
| Dolby Vision / HDR10+ / Dynamic HDR / HLG | | • / • / • / • |
| ALLM (Auto Low Latency Mode) Pass-through for gaming | | • |
| Variable Refresh Rate / Quick Frame Transport / Quick Media Switching | | • / • / • |
| HDMI pass-through in Standby Mode | | • |
| DSD Audio Capability | | - |
| Auto LipSync | | • |
| Multiroom / CI | | |
| HEOS Multi-Room Integrated | | • |
| TV Sound Grouping | | • |
| Multi-Room zones | | 2 |
| Zone Audio Source: HDMI / Opt, Coax / Network, USB / Analogue | | • (2ch) / • (2ch) / • / • |
| Zone Audio Output: Speaker / Preout | | • / • |
| Zone HDMI Output from HDMI Source | | - |
| IP Control / RS232 Control / Web Control / App Control | | • / • / • / • |
| IR Flasher In | | • |
| Marantz Remote Bus | | • |
| DC Trigger Output | | 1 |
| HDMI Diagnostics | | • |

| | | |
|--|--|---------------------------------|
| Others | | |
| Auto Speaker Setup by Microphone | | Audyssey MultEQ XT |
| FL Display | | Port Hole |
| Graphic User Interface - GUI | | Advanced |
| ISF Certification | | • |
| GUI Languages | | 9 |
| Setup Assistant | | • |
| Smart Select | | • |
| Firmware Update by Network / USB | | • / • |
| Variable Cross Over | | • |
| Optimized Bass Redirection | | • |
| Bass Sync | | - |
| ECO Mode | | • |
| Auto Power Off | | • |
| Sleep Timer | | • |
| Video Inputs/Outputs | | |
| Composite In / Out | | 2+1 / 1 |
| Component In / Out | | 2 / 1 |
| HDMI In / Out | | 6 / 2 |
| Multi-Room Video Out: Video / HDMI | | - / - |
| Audio Inputs/Outputs | | |
| Analogue In / Out | | 4+1 / - |
| Phono (MM) In | | • |
| Digital In: Optical / Coaxial | | 2 / 2 |
| Multi-Room Out: Analogue / Digital | | 1 / - |
| Multichannel Pre Out | | • (7.2) |
| Subwoofer Out | | 2 |
| 7.1 Multichannel Input | | - |
| Other | | |
| Speaker Terminal: Gold Plated Screw / Regular Screw | | - / • |
| Number of Speaker Terminals | | 7 |
| Speaker A / B | | assignable |
| Bi-Amp Drive | | assignable |
| Multi-Room Speaker Terminal | | assignable |
| Front Inputs: Audio / Composite / Digital (Opt) / HDMI / USB | | • / • / - / - / • |
| USB Audio | | • |
| FM/DAB+ Tuner | | • |
| General Power | | |
| Number of Poweramps | | 7 |
| Power Output (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive) | | 100 W |
| Power Output (6 ohm, 1 kHz, 0.7% 2ch Drive) | | 140 W |
| Power Output (6 ohm, 1 kHz, 1% 1ch Drive) | | 180 W |
| 70% Guarantee | | • |
| General | | |
| Metal Front Panel | | - |
| System Remote Control | | RC042SR |
| Pre-Programmed / Learnable / LCD Display | | - / - / - |
| Power Consumption in W | | 650 |
| Power Consumption No-Sound (ECO on / off) in W | | 45 W / 75 W |
| Standby Consumption in W | | 0.2 |
| CEC Standby Consumption in W | | 0.5 |
| Network Standby Consumption in W | | 3.7 |
| Dimensions | | |
| Maximum Dimensions in mm | | |
| Antenna:Horizontal:(W x D x H) | | 440 x 348 x 161 |
| Antenna:Vertical:(W x D x H) | | 440 x 348 x 231 |
| w/o Antenna:(W x D x H) | | 440 x 338 x 161 |
| Weight in kg | | 10.1 |
| Carton Maximum Dimensions (W x D x H) in mm | | 520 x 429 x 243 |
| Carton Weight (incl. product) in kg | | 12.3 |
| SAP Code / EAN Black | | SR5015DAB/N1B 4951035073117 |
| SAP Code / EAN Silver-Gold | | SR5015DAB/N1SG 4951035073124 |

Design and specifications are subject to change by Marantz without notice.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

www.marantz.com

Sound United
A Division of D&M Europe B.V.
P.O. Box 8744
5605 LS Eindhoven
The Netherlands